

Documentation of the Oil and Gas Supply Module (OGSM)

March 2004

Energy Information Administration
Oil and Gas Division
Office of Integrated Analysis and Forecasting

Contents

1. Introduction	1-1
2. Model Purpose	2-1
3. Model Structure	3-1
Introduction	3-1
Lower 48 Onshore Supply Submodule	3-3
Unconventional Gas Recovery Supply Submodule	3-16
Offshore Supply Submodule	3-17
Alaska Oil and Gas Supply Submodule	3-17
Foreign Natural Gas Supply Submodule	3-25
Appendices	
3-A. Discounted Cash Flow Algorithm	3-A-1
3-B. Unconventional Gas Recovery Supply Submodule	3-B-1
3-C. Unconventional Gas Recovery Technologies	3-C-1
3-D. Offshore Oil and Gas Supply Submodule	3-D-1
Appendices	
A. Data	A-1
B. Bibliography	B-1
C. Model Abstract	C-1
D. Data Quality and Estimation	D-1

Tables

3A-1. Tax Treatment in Oil and Gas Production by Category of Company Under Tax Legislation	3-A-6
3A-2. MACRS Schedules (Percent)	3-A-9
3B-1. USGS 1995 National Assessment	3-B-3
3B-2. Tight Gas Production	3B-10
3B-3. Tight Sand Resource Base	3B-12
3B-4. Gas Shale Resource Base	3B-14
3B-5. Coalbed Methane Resource Base	3B-15
3B-6. Drilling Costs for Coalbed Methane	3B-26
3B-7. Drilling Costs for Tight Sands	3B-26
3B-8. Drilling Costs for Gas Shales	3B-30
3B-9. Lease Equipment Costs Matrix	3B-32
3B-10. Operation and Maintenance Costs Matrix	3B-35
3B-11. Drilling Rules Matrix	3B-40
3C-1. Summary of Technological Progress	3-C-4
3C-2. Details of Coalbed Methane Technological Progress	3-C-6
3C-3. Details of Gas Shales Technological Progress	3-C-8
3C-4. Details of Tight Gas Sands Technological Progress	3C-10
3C-5. Parameter Values for Basin Assessment Technologies	3C-13
3C-6. Hypothetical CBM Plays and Resources	3C-14
3C-7. Hypothetical Gas Shale Plays and Resources	3C-15
3C-8. Hypothetical Tight Sands Plays and Resources	3C-16
3C-9. Parameter Values for Reservoir Characterization Technologies	3C-18
3C-10. Emerging CBM Plays and Resources	3C-19

3C-11. Emerging Gas Shale Plays and Resources	3C-20
3C-12. Emerging Tight Sand Plays and Resources	3C-21
3C-13. Parameter Values for Advanced Well Performance Diagnostics and Remediation Technologies	3C-23
3C-14. CBM Plays with Proved Reserves	3C-24
3C-15. Gas Shales Plays with Proved Reserves	3C-25
3C-16. Tight Sand Plays with Proved Reserves	3C-26
3C-17. Parameter Values for Advanced Exploration and Natural Fracture Detection Technologies	3C-28
3C-18. Parameter Values for Geology/Technology Modeling and Matching Technologies ...	3C-29
3C-19. Parameter Values for Lower Damage, More Effective Well Completions and Stimulation Technologies	3C-30
3C-20. Natural Gas Well Drilling and Completion Costs	3C-31
3C-21. Parameter Values for Unconventional Gas Specific Drilling and Hydraulic Fracturing R&D	3C-32
3C-22. Natural Gas Well Operating Cost Indices	3C-33
3C-23. Parameter Values for New Practices & Technologies for Water Disposal and Gas Treatment	3C-34
3C-24. Unconventional Gas Plays Applicable for Advanced Drilling and Completion Technologies	3C-35
3C-25. Parameter Values for Advanced Well Drilling and Completion Technologies	3C-37
3C-26. Parameter Values for Other Unconventional Gas Technologies Improving and Accelerating Gas Production	3C-39
3C-27. Technology Parameters for Technologies Mitigating Environmental & Other Constraints on Development	3C-40
3C-28. Gas Development and Well Performance, Williams Fork Formation Gas Fields, Piceance Basin	3C-46
3C-29. Well Performance and Technology Progress, Williams Fork Formation Gas Fields, Piceance Basin	3C-47
3C-30. Dry Hole Rate and Technology Progress, Williams Fork Formation Gas Fields, Piceance Basin	3C-49

3C-31. Reserve Growth and Technology Progress, Williams Fork Formation Gas Fields, Piceance Basin	3C-49
3C-32. Intensive Field Development and Technology Progress, Williams Fork Formation (Sec. 20, T6S, 94W, Rulison)	3C-50
3C-33. Impact of Technology Progress and Intensive Resource Development, Rulison Field, Piceance Basin	3C-53
3C-34. Growth in Barnett Shale Production and Wells	3C-56
3C-35. Well Performance and Technology Progress, Barnett Shale, Fort Worth Basin	3C-56
3C-36. Well Recompletion Based Reserve Growth and Technology Progress, Barnett Shale, Fort Worth Basin	3C-58
3C-37. Increase in Resource Size/Productivity and Technology Progress, Barnett Shale, Fort Worth Basin	3C-59
3C-38. Impact of Technology Progress and Improved Well Drilling and Completions, Newark East Field, Fort Worth Basin	3C-62
3C-39. Well Performance Selectivity and Technology Progress, Drunkard's Wash CBM Field, Uinta Basin	3C-63
3C-40. Selectivity and Technology Progress, Drunkards Wash Coalbed Methane Field, Uinta Basin	3C-66
3C-41. Dry Hole Rate and Technology Progress, Ferron Coal Trend, Uinta Basin	3C-67
3D-1. Offshore Region and Evaluation Unit Crosswalk	3-D-3
3D-2. Number of Undiscovered Fields by Evaluation Unit and Field Size Class	3-D-4
3D-3. USGS Field Size Definition	3-D-5
3D-4. Production Facility by Water Depth Level	3-D-8
3D-5. Production Facility Design, Fabrication, and Installation Period	3D-10
3D-6. Number of Development Wells	3D-11
3D-7. Development Drilling Capacity by Production Facility Type	3D-11
3D-8. Production Profile Data for Oil & Gas Producing Fields	3D-14
3D-9. Offshore Exploration and Production Technology Levers	3D-16

Figures

1. OGSM Interface with Other Oil and Gas Modules	2-1
2. Oil and Gas Supply Regions	2-3
3. Submodules within the Oil and Gas Supply Module	3-1
4. Flowchart for Lower 48 States Onshore and Offshore Oil and Gas Submodules	3-4
5. Flowchart for the Alaska Oil and Gas Supply Module	3-18
6. Foreign Natural Gas Trade via Pipeline	3-26
7. A General Outline of the Canadian Algorithm of the FNGSS	3-27
3B-1. UGRSS Interfaces with EIA/NEMS Modules	3-B-1
3B-2. U.S. Lower 48 Coalbed Methane Basins	3-B-4
3B-3. U.S. Lower 48 Tight Gas Basins	3-B-5
3B-4. U.S. Lower 48 Gas Shale Basins	3-B-6
3B-5. Growth in Coalbed Methane Wells and Production	3-B-8
3B-6. Gas Shales Production and Well Completions	3-B-9
3B-7. UGRSS General Process Flow Diagram	3B-18
3C-1. NEMS Unconventional Gas Recovery Supply Submodule	3-C-2
3C-2. Major Williams Fork Formation Natural Gas Field Locations, Southern Piceance Basin	3C-45
3C-3. Well Performance and Technology Progress, Williams Fork Formation Gas Fields, Piceance Basin	3C-48
3C-4. Geomechanics and 3-D Seismic Based Technology Progress, Williams Fork Formation	3C-51
3C-5. Location of Intensive Field Development Pilot, Section 20 Rulison Field	3C-52
3C-6. Barnett Shale Development Area, Fort Worth Basin, North Texas	3C-55
3C-7. Gas Recovery Per Well and Technology Progress, Barnett Shale, Fort Worth Basin	3C-57
3C-8. Drilling Costs and Technology Progress, Barnett Shale, Fort Worth Basin	3C-61
3C-9. Drunkard's Wash Ferron Coalbed Methane Field, East-Central Utah	3C-64
3C-10. Ferron Coalbed Methane Play	3C-65

3D-1. Prospect Exploration, Development, and Production Schedule	3-D-5
3D-2. Flowchart for Undiscovered Field Component of the OOGSS	3-D-6
3D-3. Undiscovered Field Production Profile	3D-12
3D-4. Discovered Undeveloped Field Production Profile	3D-13
3D-5. Production Profile for Producing Fields - Constant Production Case	3D-14
3D-6. Production Profile for Producing Fields - Declining Production Case	3D-14

1. Introduction

The purpose of this report is to define the objectives of the Oil and Gas Supply Model (OGSM), to describe the model's basic approach, and to provide detail on how the model works. This report is intended as a reference document for model analysts, users, and the public. It is prepared in accordance with the Energy Information Administration's (EIA) legal obligation to provide adequate documentation in support of its statistical and forecast reports (Public Law 93-275, Section 57(b)(2)).

Projected production estimates of U.S. crude oil and natural gas are based on supply functions generated endogenously within National Energy Modeling System (NEMS) by the OGSM. OGSM encompasses domestic crude oil and both conventional and unconventional natural gas supply. Unconventional gas recovery (UGR) includes supply from tight gas formations, gas shales, and coalbeds. Crude oil and natural gas projections are further disaggregated by geographic region. OGSM projects U.S. domestic oil and gas supply for six Lower 48 onshore regions, three offshore regions, and Alaska. The general methodology relies on forecasted profitability to determine exploratory and developmental drilling levels for each region and fuel type. These projected drilling levels translate into reserve additions, as well as a modification of the production capacity for each region.

OGSM also represents foreign trade in natural gas, simulating imports and exports by entry region. Foreign gas trade may occur via either pipeline (Canada or Mexico), or via transport ships as liquefied natural gas (LNG). These import supply functions are critical elements of any market modeling effort.

OGSM utilizes both exogenous input data and data from other modules within NEMS. The primary exogenous inputs are resource levels, finding rate parameters, costs, production profiles, and tax rates - all of which are critical determinants of the expected returns from projected drilling activities. Regional projections of natural gas wellhead prices and production are provided by the Natural Gas Transmission and Distribution Module (NGTDM). From the Petroleum Market Model (PMM) come projections of the crude oil wellhead prices at the OGSM regional level. Important economic factors, namely interest rates and GDP deflators flow to OGSM from the Macroeconomic Module. Controlling information (e.g., forecast year) and expectations information (e.g., expected price paths) come from the integrating, or system module.

Outputs from OGSM go to other oil and gas modules (NGTDM and PMM) and to other modules of NEMS. To equilibrate supply and demand in the given year, the NGTDM employs short-term supply functions (the parameters for which are provided by OGSM) to determine nonassociated gas production and natural gas imports. Crude oil production is determined within the OGSM using short-term supply functions. These short-term supply functions reflect potential oil or gas flows to the market for a 1-year period. The gas functions are used by NGTDM and the oil volumes are used by PMM for the determination of equilibrium prices and quantities of crude oil and natural gas at the wellhead. OGSM also provides projections of natural gas production to PMM to estimate the corresponding level of natural gas liquids production. Other NEMS modules receive projections of selected OGSM variables for various uses. Oil and gas production is forwarded to the Systems Module. Forecasts of oil and gas production go to the Macroeconomic Module to assist in forecasting aggregate measures of output.

OGSM is archived as part of the National Energy Modeling System (NEMS). The archival package of NEMS is located under the model acronym NEMS2004. The version is that used to produce the *Annual Energy Outlook 2004 (AEO2004)*. The package is available through the National Technical Information Service. The model contact for OGSM is:

Ted McCallister
Room 2E-088
Forrestal Building
Energy Information Administration
1000 Independence Avenue, S.W.
Washington, D.C.
Phone: 202-586-4820

This OGSM documentation report presents the following major topics concerning the model.


- Model purpose
- Model structure
- Inventory of input data, parameter estimates, and model output

2. Model Purpose

OGSM is a comprehensive framework with which to analyze oil and gas supply potential and related issues. Its primary function is to produce forecasts of crude oil and natural gas production, and natural gas imports and exports in response to price data received endogenously (within NEMS) from the Natural Gas Transmission and Distribution Model (NGTDM) and the Petroleum Market Model (PMM). The OGSM does not provide nonassociated gas production forecasts per se, but rather parameter estimates for short-term domestic gas production functions that reside in the NGTDM.

The NGTDM utilizes the OGSM supply functions during a solution process that determines regional wellhead market-clearing prices and quantities. After equilibration is achieved in each forecast year, OGSM calculates revised parameter estimates for the supply functions for the next year of the forecast based on equilibrium prices from the PMM and NGTDM and natural gas quantities received from the NGTDM. OGSM then sends the revised parameters to NGTDM, which updates the short-term supply functions for use in the following forecast year. The determination of the projected natural gas and crude oil wellhead prices and quantities supplied occurs within the NGTDM, PMM, and OGSM. As the supply component only, OGSM cannot project prices, which are the outcome of the equilibration of demand and supply. The basic interaction between OGSM and the other oil and gas modules is represented in Figure 1. Controlling information and expectations come from the System Module. Major exogenous inputs include resource levels, finding rate parameters, costs, production profiles, and tax rates - all of which are critical determinants of the oil and gas supply outlook of the OGSM.

Figure 1. OGSM Interface with Other Oil and Gas Modules

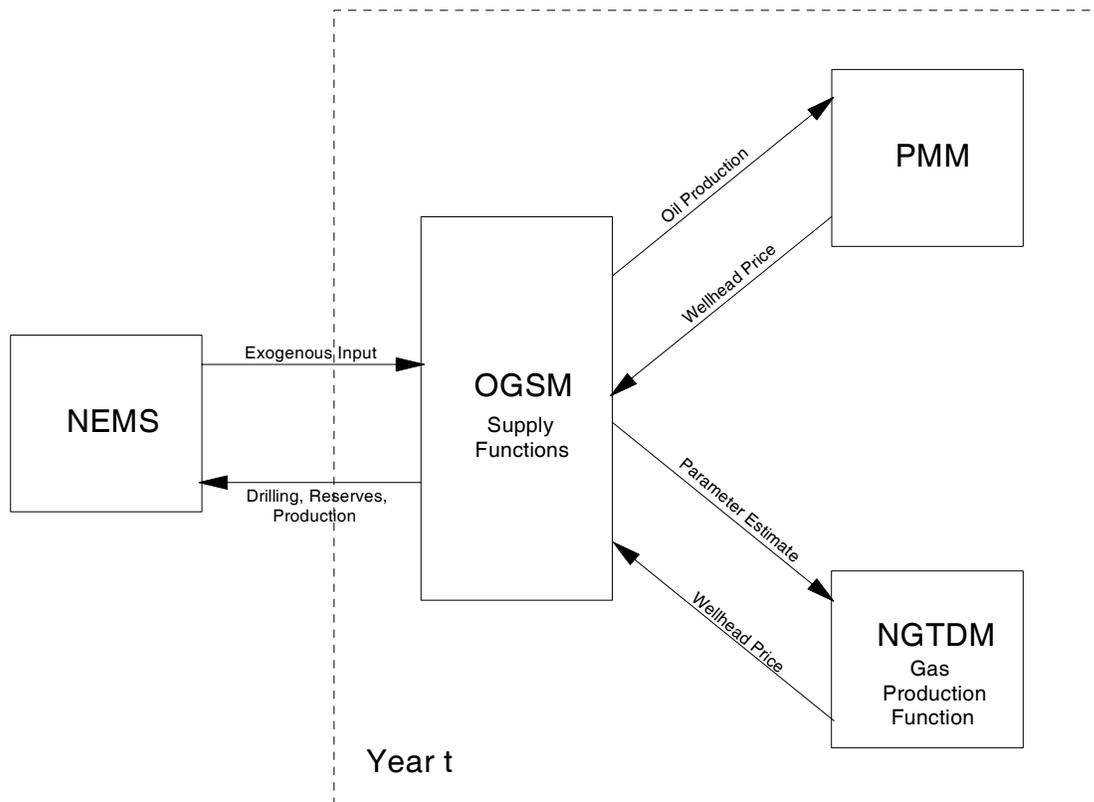

OGSM operates on a regionally disaggregated level, further differentiated by fuel type. The basic geographic regions are Lower 48 onshore, Lower 48 offshore, and Alaska, each of which, in turn, is divided into a number of subregions (see Figure 2). The primary fuel types are crude oil and natural gas, which are further disaggregated based on type of deposition, method of extraction, or geologic formation. Crude oil supply includes lease condensate. Natural gas is differentiated by nonassociated and associated-dissolved gas.¹ Nonassociated natural gas is categorized by conventional and unconventional types. The unconventional gas category in OGSM consists of resources in tight sands, gas shales, and coalbed methane formations.

OGSM provides mid-term (through year 2025) forecasts, as well as serving as an analytical tool for the assessment of various policy alternatives. One publication that utilizes OGSM forecasts is the *Annual Energy Outlook (AEO)*. Analytical issues OGSM can address involve policies that affect the profitability of drilling through impacts on certain variables including:

- drilling costs,
- production costs,
- regulatory or legislatively mandated environmental costs,
- key taxation provisions such as severance taxes, State or Federal income taxes, depreciation schedules and tax credits, and
- the rate of penetration for different technologies into the industry by fuel type.

The cash flow approach to the determination of drilling levels enables OGSM to address some financial issues. In particular, the treatment of financial resources within OGSM allows for explicit consideration of the financial aspects of upstream capital investment in the petroleum industry.



OGSM is also useful for policy analysis of resource base issues. OGSM analysis is based on explicit estimates for technically recoverable oil and gas resources for each of the sources of domestic production (i.e., geographic region/fuel type combinations). With some modification this feature could allow the model to be used for the analysis of issues involving:

- the uncertainty surrounding the technically recoverable oil and gas resource estimates, and
- access restrictions on much of the offshore Lower 48 states, the wilderness areas of the onshore Lower 48 states, and the 1002 Study Area of the Arctic National Wildlife Refuge (ANWR).

In general, OGSM will be used to foster a better understanding of the integral role that the oil and gas extraction industry plays with respect to the entire oil and gas industry, the energy subsector of the U.S. economy, and the total U.S. economy.

¹Nonassociated (NA) natural gas is gas not in contact with significant quantities of crude oil in a reservoir. Associated-dissolved natural gas consists of the combined volume of natural gas that occurs in crude oil reservoirs either as free gas (associated) or as gas in solution with crude oil (dissolved).

Figure 2. Lower 48 Oil and Gas Supply Regions

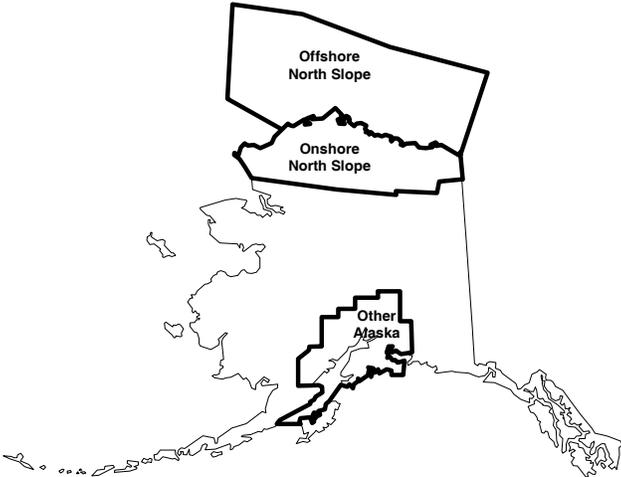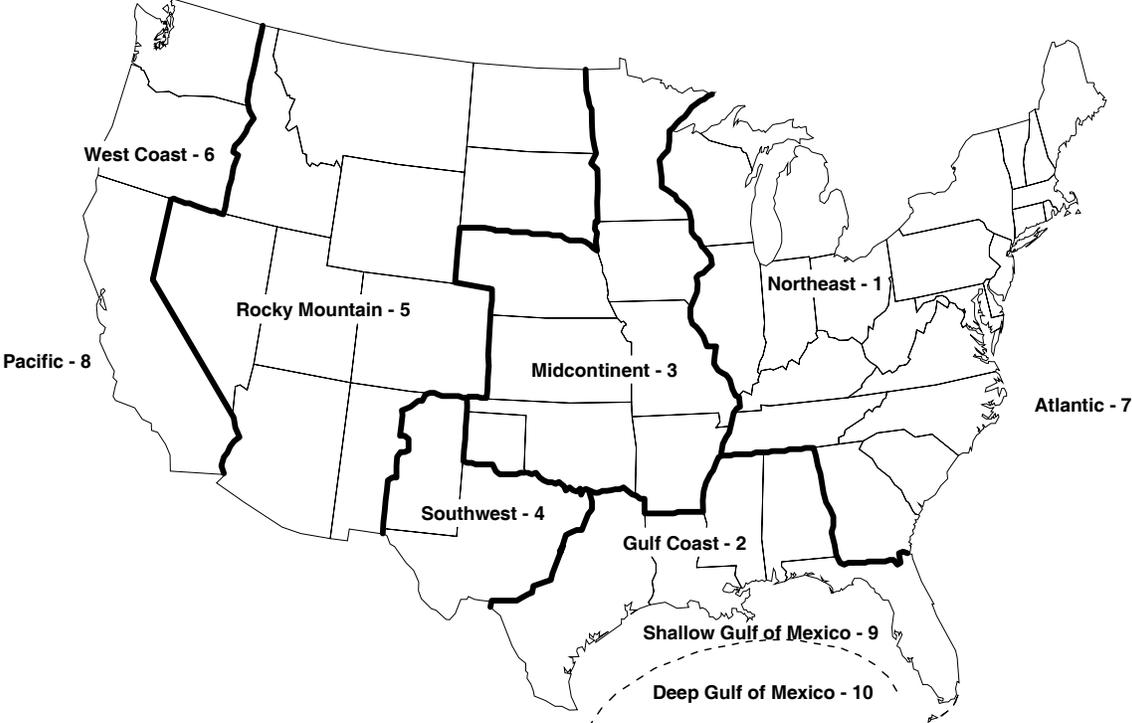

3. Model Structure


Introduction

This chapter describes the Oil and Gas Supply Module (OGSM), which consists of a set of submodules (Figure 3) that perform supply analysis of domestic oil and gas production and foreign trade in natural gas between the United States and other countries via pipeline or as liquefied natural gas. The OGSM provides crude oil production and parameter estimates representing natural gas supplies by selected fuel types on a regional basis to support the market equilibrium determination conducted within other modules of the National Energy Modeling System (NEMS). The oil and gas supplies in each period are balanced against the regional derived demand for the produced fuels to solve simultaneously for the market clearing prices and quantities in the disjoint wellhead and enduse markets. The description of the market analysis models may be found in the separate methodology documentation reports for the Petroleum Market Module (PMM) and the Natural Gas Transmission and Distribution Model (NGTDM).

The OGSM mirrors the activity of numerous firms that produce oil and natural gas from domestic fields throughout the United States or acquire natural gas from foreign producers for resale in the United States or sell U.S. gas to foreign consumers. The OGSM encompasses domestic crude oil and natural gas supply by both conventional and nonconventional recovery techniques. Nonconventional recovery includes unconventional gas recovery (UGR) from low permeability sandstone and shale formations, and coalbeds. Crude oil and natural gas projections are further disaggregated by geographic region. The OGSM represents foreign trade in natural gas as pipeline imports and exports by entry region of the United States. Liquefied natural gas (LNG) imports are determined in the NGTDM.

The model's methodology is shaped by the basic principle that the level of investment in a specific activity is determined largely by its expected profitability. In particular, the model assumes that investment in exploration and development drilling, by fuel type and geographic region, is a function of the expected profitability of exploration and development drilling, disaggregated by fuel type and geographic region.

Figure 3. Submodules within the Oil and Gas Supply Module

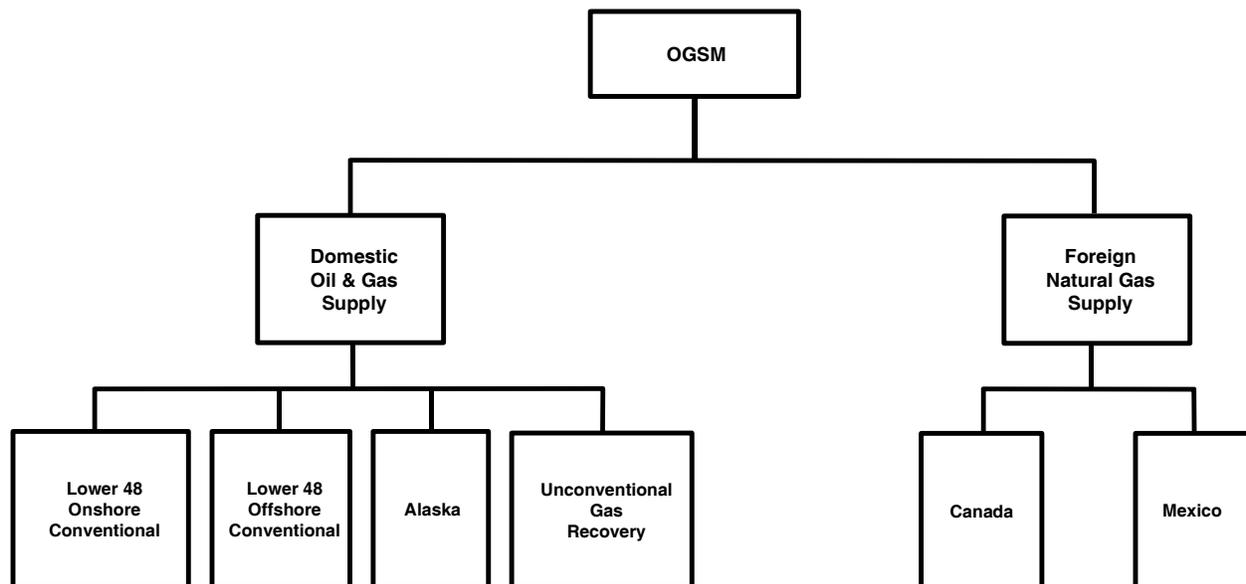

The OGSM includes an enhanced methodology for estimating short-term oil and gas supply functions. Short-term is defined as a 1-year period in the OGSM. This enhancement improves the procedure for equilibrating the natural gas and oil markets by allowing for the determination of regional market clearing prices for each fuel, as opposed to the previous modeling system that only equilibrates markets at a national market clearing price.

Output prices influence oil and gas supplies in distinctly different ways in the OGSM. Quantities supplied as the result of the annual market equilibration in the PMM and NGTDM are determined as a direct result of the observed market price in that period. Longer-term supply responses are related to investments required for subsequent production of oil and gas. Output prices affect the expected profitability of these investment opportunities as determined by use of a discounted cash flow evaluation of representative prospects.

The OGSM, compared to the previous EIA midterm model, incorporates a more complete and representative description of the processes by which oil and gas in the technically recoverable resource base¹ convert to proved reserves.² The previous model treated reserve additions primarily as a function of undifferentiated exploratory drilling. The relatively small amount of reserve additions from other sources was represented as coming from developmental drilling.

The OGSM distinguishes between drilling for new fields and that for additional deposits within old fields. This enhancement recognizes important differences in exploratory drilling, both by its nature and in its physical and economic returns. New field wildcats convert resources in previously undiscovered fields³ into both proved reserves (as new discoveries) and inferred reserves.⁴ Other exploratory drilling and developmental drilling add to proved reserves from the stock of inferred reserves. The phenomenon of reserves appreciation is the process by which initial assessments of proved reserves from a new field discovery grow over time through extensions and revisions. This improved resource accounting approach is more consistent with literature regarding resource recovery.⁵

The breadth of supply processes that are encompassed within OGSM results in methodological differences between the oil and gas production from lower 48 onshore conventional resources, lower 48 onshore unconventional resources, lower 48 offshore, Alaska, and foreign gas trade. The present OGSM consequently comprises a set of four distinct approaches and corresponding submodules. The label OGSM as used in this report generally refers to the overall framework and the implementation of lower 48 onshore oil and conventional gas supply. The Unconventional Gas Recovery Supply Submodule (UGRSS) models gas supply from low permeability sandstone and shale formations, and coalbeds. The Offshore Oil and Gas Supply Submodule (OOGSS) models oil and gas exploration and development in the offshore Gulf of Mexico and Pacific regions. The Alaska Oil and Gas Supply Submodule (AOGSS) represents industry supply activity

¹*Economically recoverable resources* are those volumes considered to be of sufficient size and quality for their production to be commercially profitable by current conventional technologies, under specified economic assumptions. Economically recoverable volumes include proved reserves, inferred reserves, as well as undiscovered and other unproved resources. These resources may be recoverable by techniques considered either conventional or unconventional. Economically recoverable resources are a subset of *technically recoverable resources*, which are those volumes producible with current recovery technology and efficiency but without reference to economic viability.

²*Proved reserves* are the estimated quantities that analysis of geological and engineering data demonstrate with reasonable certainty to be recoverable in future years from known reservoirs under existing economic and operating conditions.

³*Undiscovered resources* are located outside of oil and gas fields in which the presence of resources has been confirmed by exploratory drilling, and thus exclude reserves and reserve extensions; however, they include resources from undiscovered pools within confirmed fields to the extent that such resources occur as unrelated accumulations controlled by distinctly separate structural features or stratigraphic conditions.

⁴*Inferred reserves* are that part of expected ultimate recovery from known fields in excess of cumulative production plus current reserves.

⁵See, for example, *An Assessment of the Natural Gas Resource Base of the United States*, R.J. Finley and W.L. Fisher, *et al*, 1988, and *The Potential for Natural Gas in the United States*, Volume II, National Petroleum Council, 1992.

in Alaska. The Foreign Natural Gas Supply Submodule (FNGSS) models trade in natural gas between the United States and other countries. These distinctions are reflected in the presentation of the methodology in this chapter.

Several changes were made to the OGSM for the AEO2004. New finding rate functions for crude oil and conventional natural gas resources were incorporated. Lower 48 onshore and offshore rigs, drilling, and drilling cost equations were re-estimated for conventional sources. Parameters for the Unconventional Gas Recovery Submodule were updated. Oil resource estimates for the National Petroleum Reserve in Alaska (NPR-A) were revised. The drilling equations and finding rate functions for the Canadian Supply Submodule were revised to improve performance. New submodules for offshore supply and LNG were developed. The LNG submodule is now part of the NGTDM.

The following sections describe OGSM grouped into five conceptually distinct divisions. The first section describes crude oil and conventional gas supply in the lower 48 States. This is followed by the methodology of the Offshore Oil and Gas Supply Submodule, the Unconventional Gas Recovery Supply Submodule, and then the Alaska Oil and Gas Supply Submodule. The chapter concludes with the presentation of the Foreign Natural Gas Supply Submodule. A set of four appendices are included following the chapter. These separate reports provide additional detail on special topics relevant to the methodology. The appendices present extended discussions on the discounted cash flow (DCF) calculation, unconventional gas recovery, technologies for unconventional gas recovery, and offshore oil and gas supply.

Lower 48 Onshore Supply Submodule


Introduction

This section describes the structure of the models that comprise the lower 48 onshore (excluding UGR) submodule of the Oil and Gas Supply Module (OGSM). The general outline of the lower 48 submodule of the OGSM is provided in Figure 4. The overall structure of the submodule can be best described as recursive. The structure implicitly assumes a sequential decision making process. A general description of the submodule's principal features and relationships computations is provided first. This is followed by a detailed discussion of the key mathematical formulas and computations used in the solution algorithm.

A discounted cash flow (DCF) algorithm is used to calculate the expected profitability of a representative well in each region. Inputs to this algorithm include oil and gas prices (from the PMM and NGTDM), production profiles, co-product ratios, drilling costs, lease equipment costs, operating costs, severance tax rates, ad valorem tax rates, royalty rates, State tax rates, Federal tax rates, tax credits, depreciation schedules, and success rates. Expected DCF values are calculated for each well type (exploratory, developmental), and for each fuel type (crude oil, shallow gas, and deep gas).

Exploratory and development wells by fuel type and region are predicted as functions of the expected profitabilities of the fuel and region-specific drilling activity. Based on region-specific historical patterns, exploration wells are broken down into new field wildcats and other exploratory wells.

Figure 4. Flowchart for Lower 48 States Onshore Oil and Gas Submodule

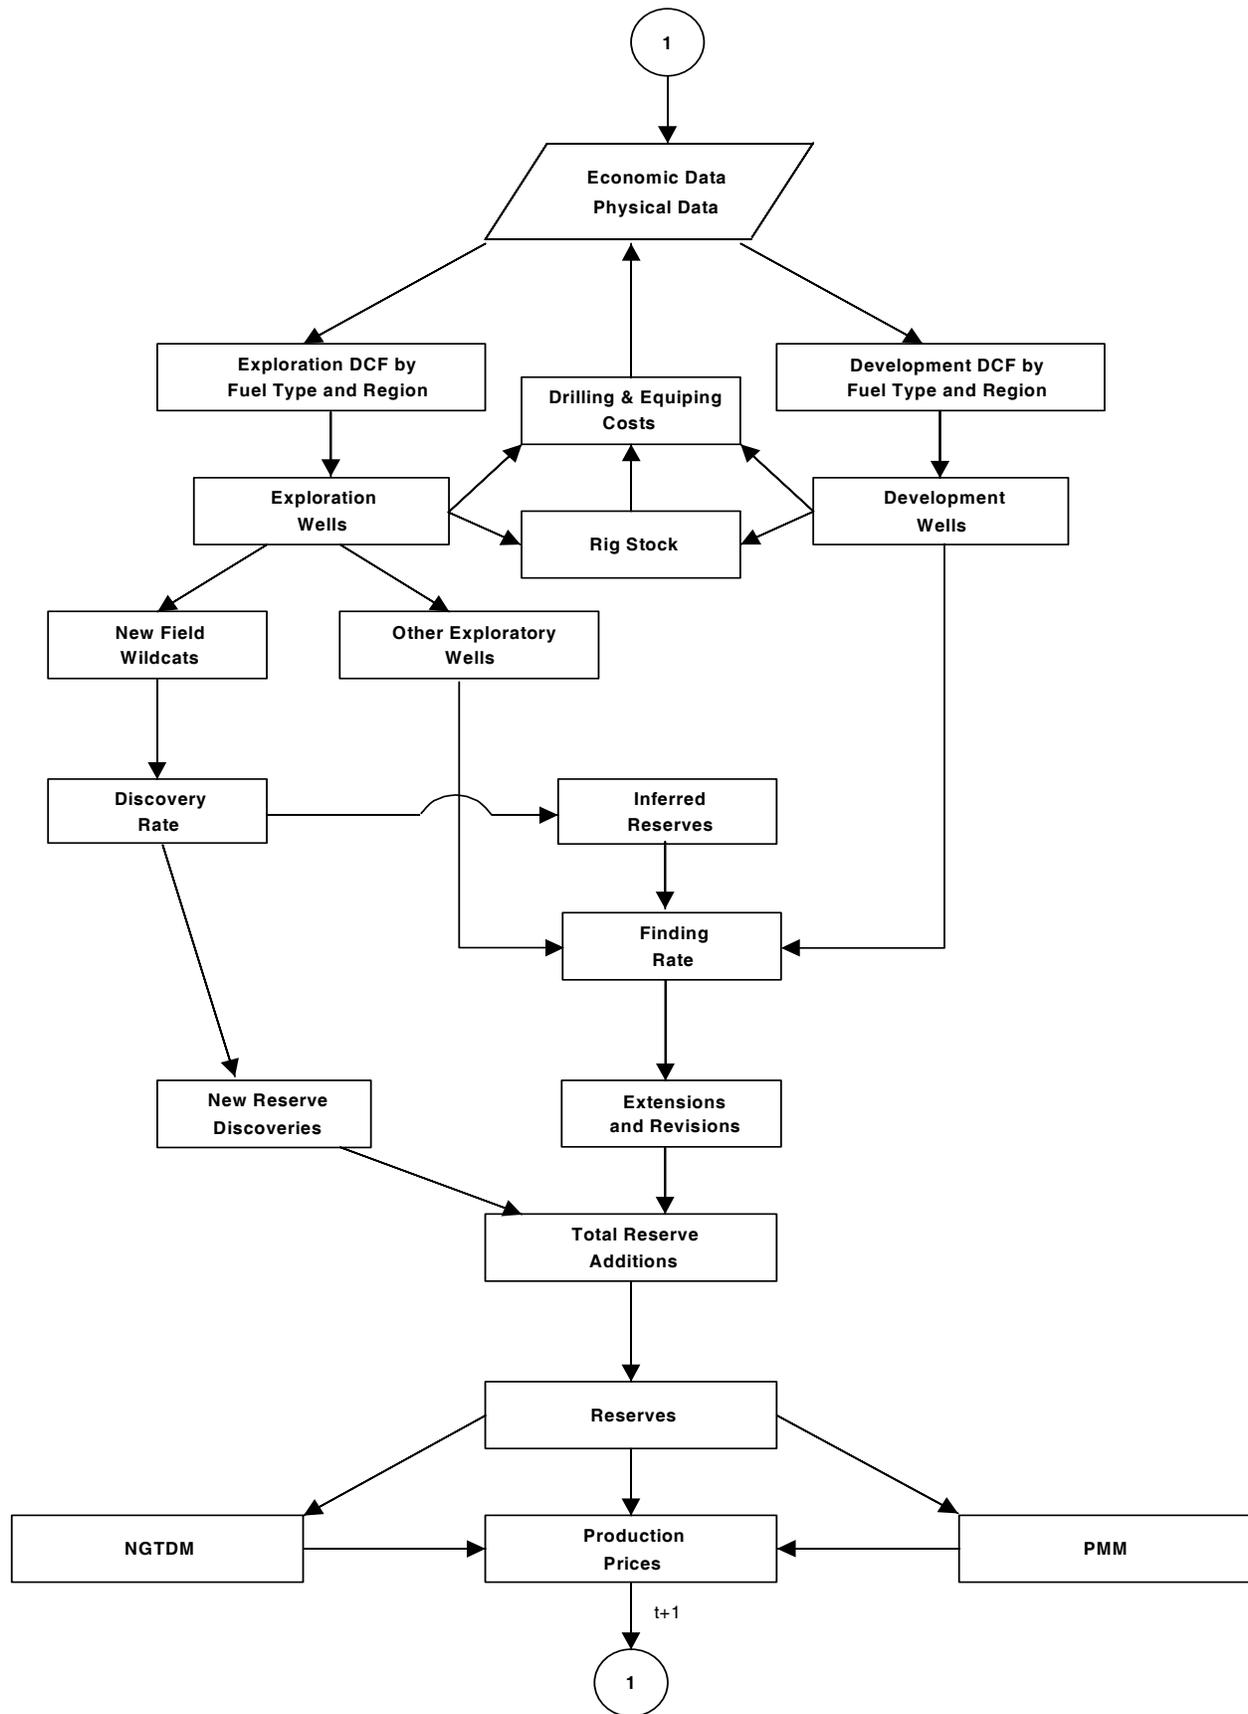

The forecasted numbers of new field wildcats, other exploratory wells, and developmental wells are used in a set of finding rate equations to determine additions to oil and gas reserves each period. New field wildcats determine new field discoveries. Based on the historical relationship between the initial quantity of proved reserves discovered in a field and the field's ultimate recovery, reserves from new field discoveries are categorized into additions to proved reserves and inferred reserves. Inferred reserves are converted into proved reserves (extensions and revisions) in later periods by drilling other exploratory wells and development wells.

Reserve additions are added to the end-of-year reserves for the previous period while the current period's production is subtracted to yield the end of year reserves for the current period. Natural gas reserves along with an estimate of the expected production-to-reserves ratio for the next period are passed to the NGTDM for use in their short-run supply functions.

The Expected Discounted Cash Flow Algorithm

For each year t , the algorithm calculates the expected DCF for a representative well of type i , in region r , for fuel type k . The calculation assumes only one source of uncertainty--geology. The well can be a success (wet) or a failure (dry). The probability of success is given by the success rate; the probability of failure is given by one minus the success rate. For expediency, the model first calculates the discounted cash flow for a representative project, conditional on a requisite number of successful wells. The conditional project discounted cash flow is then converted into the expected discounted cash flow of a representative well as shown below.

Onshore Lower 48 Development

A representative onshore developmental project⁶ consists of one successful developmental well along with the associated number of dry holes. The number of dry developmental wells associated with one successful development well is given by $[(1/SR) - 1]$ where SR represents the success rate for a development well in a particular region r and of a specific fuel type. Therefore, $(1/SR)$ represents the total number of wells associated with one successful developmental well. All wells are assumed to be drilled in the current year with production from the successful well assumed to commence in the current year.

For each year of the project's expected lifetime, the net cash flow is calculated as:

$$\begin{aligned} \text{NCFON}_{i,r,k,s} = & (\text{REV} - \text{ROY} - \text{PRODTAX} - \text{DRILLCOST} - \text{EQUIPCOST} \\ & \text{OPCOST} - \text{DRYCOST} - \text{STATETAX} - \text{FEDTAX})_{i,r,k,s}, \text{ for } i \\ & r = 1 \text{ thru } 6, k = 1 \text{ thru } 4, s = t \text{ thru } t+L \end{aligned} \quad (1)$$

where,

NCFON	=	annual undiscounted net cash flow for a representative onshore development project
REV	=	revenue from the sale of the primary and co-product fuel
ROY	=	royalty taxes

⁶Equations (1) through (6) in this section and the following one describe the computation of the expected discounted cash flow estimate for a representative onshore exploratory or developmental well, denoted as $\text{DCFON}_{i,r,k,t}$ in equations (4) and (6). An equivalent set of calculations determine $\text{DCFOFF}_{i,r,k,t}$, the expected discounted cash flow estimate for a representative offshore exploratory or developmental well. In these equations, the suffix "ON" is replaced everywhere by "OFF," with all other particulars remaining the same. These alternate equations are not shown to avoid redundancy in the presentation.

PRODTAX	=	production taxes (severance plus ad valorem)
DRILLCOST	=	the cost of drilling the successful developmental well
EQUIPCOST	=	lease equipment costs
OPCOST	=	operating costs
DRYCOST	=	cost of drilling the dry developmental wells
STATETAX	=	state income tax liability
FEDTAX	=	federal income tax liability
I	=	well type (1 = exploratory, 2 = development)
r	=	subscript indicating onshore regions (see Figure 2 for OGSM region codes)
k	=	subscript indicating fuel type
s	=	subscript indicating year of project life
t	=	current year of forecast
L	=	expected project lifetime. ⁷

The calculation of REV depends on expected production and prices. Expected production is calculated on the basis of individual wells. Flow from each successful well begins at a level equal to the historical average for production over the first 12 months. Production subsequently declines at a rate equal to the historical average production to reserves ratio. The default price expectation is that real prices will remain constant over the project's expected lifetime. The OGSM also can utilize an expected price vector provided from the NEMS system that reflects a user-specified assumption regarding price expectations. The calculations of STATETAX and FEDTAX account for the tax treatment of tangible and intangible drilling expenses, lease equipment expenses, operating expenses, and dry hole expenses. The algorithm also incorporates the impact of unconventional fuel tax credits and has the capability of handling other forms of investment tax credits. For a detailed discussion of the discounted cash flow methodology, the reader is referred to Appendix 4-A at the end of this chapter.

The undiscounted net cash flows for each year of the project, calculated by Equation (1), are discounted and summed to yield the discounted cash flow for the representative onshore developmental project (PROJDCFON). This can be written as:

$$\text{PROJDCFON}_{i,r,k,t} = \text{SUCDCFON}_{i,r,k,t} + \left[\left(\frac{1}{\text{SR}_{i,r,k}} \right) - 1 \right] * \text{DRYDCFON}_{i,r,k,t} \quad (2)$$

for $i = 2$

where,

PROJDCFON	=	the discounted cash flow for a representative developmental project
SUCDCFON	=	the discounted cash flow associated with one successful onshore developmental well
DRYDCFON	=	the discounted cash flow associated with one dry onshore developmental well (dry hole costs).

Since the expected discounted cash flow for a representative onshore developmental well is equal to:

$$\text{DCFON}_{i,r,k,t} = \text{SR}_{i,r,k} * \text{SUCDCFON}_{i,r,k,t} + (1 - \text{SR}_{i,r,k}) * \text{DRYDCFON}_{i,r,k,t} \quad \text{for } i = 2 \quad (3)$$

it is easily calculated as:

⁷Abandonment of a project is expected to occur in that year of its life when the expected net revenue is less than expected operating costs. When abandonment does occur, expected abandonment costs are added to the calculation of the project's discounted cash flow.

$$\text{DCFON}_{i,r,k,t} = \text{PROJDCFON}_{i,r,k,t} * \text{SR}_{i,r,k}, \text{ for } i = 2, r = 1 \text{ thru } 6, k = 1 \text{ thru } 4 \quad (4)$$

where,

DCFON = expected discounted cash flow for a representative onshore developmental well.
 SR = drilling success rate

Onshore Lower 48 Exploration

A representative onshore exploration project consists of one successful exploratory well, [(1/SR_{1,r,k})-1] dry exploratory wells, m_k successful development wells, and m_k*[(1/SR_{2,r,k})-1] dry development wells. All exploratory wells are assumed to be drilled in the current year with production from the successful exploratory well assumed to commence in the current year. The developmental wells are assumed to be drilled in the second year of the project with production from the successful developmental well assumed to begin in the second year.

The calculations of the yearly net cash flows and the discounted cash flow for the exploratory project are identical to those described for the developmental project. The discounted cash flow for the exploratory project can be decomposed as:

$$\begin{aligned} \text{PROJDCFON}_{1,r,k,t} = & \text{SUCDCFON}_{1,r,k,t} + m_k * \left[\text{SUCDCFON}_{2,r,k,t} + \left(\left(\frac{1}{\text{SR}_{2,r,k}} \right) - 1 \right) * \right. \\ & \left. \text{DRYDCFON}_{2,r,k,t} \right] + \left(\left(\frac{1}{\text{SR}_{1,r,k}} \right) - 1 \right) * \text{DRYDCFON}_{1,r,k,t} \end{aligned} \quad (5)$$

where,

m_k = number of successful developmental wells in a representative project.

The first two terms on the right hand side represent the discounted cash flows associated with the successful exploratory well drilled in the first year of the project and the successful and dry developmental wells drilled in the second year of the project. The third term represents the impact of the dry exploratory wells drilled in the first year of the project.

Again, as in the development case, the expected DCF for a representative onshore exploratory well is calculated by:

$$\text{DCFON}_{1,r,k,t} = \text{PROJDCFON}_{1,r,k,t} * \text{SR}_{1,r,k} \quad (6)$$

Calculation of Alternative Expected DCF's as Proxies for Expected Profitability

In some instances, the forecasting equations employ alternative, usually more aggregated, forms of the expected DCF. For example, an aggregate expected fuel level DCF is calculated for each region. This aggregate expected DCF is calculated as a weighted average of the expected exploratory DCF and the expected developmental DCF for each fuel. Specifically,

$$w1_{i,r,k,t} = \frac{WELLS_{i,r,k,t-1}}{\sum_{i=1}^2 WELLS_{i,r,k,t-1}} \quad (7)$$

and

$$ODCFON_{r,t} = \sum_{i=1}^2 w1_{i,r,k,t} * DCFON_{i,r,k,t} \text{ for } k=1 \quad (8)$$

$$SGDCFON_{r,t} = \sum_{i=1}^2 w1_{i,r,k,t} * DCFON_{i,r,k,t} \text{ for } k=3 \quad (9)$$

where,

WELLS	=	wells drilled
ODCFON	=	expected DCF for oil
SGDCFON	=	expected DCF for shallow gas
DCFON	=	expected discounted cash flow for a representative onshore well.

Calculation of Cash Flow for Wells Determination

Expected industry cash flow is calculated as,

$$CASHFLOW_t = c0 + c1 * OILRATIO_t + c2 * GASRATIO_t \quad (10)$$

where OILRATIO (GASRATIO) is the ratio of the price of oil (natural gas) in 1997 dollars to the national oil (natural gas) well operating cost index in 1997 dollars. The national operating cost indices were constructed as follows.

For each year, a weighted average of regional well operating costs (in 1997 dollars) was calculated for oil, shallow gas, and deep gas using successful wells from the previous year as weights. The national gas operating cost was calculated as a weighted average of the national shallow and deep operating costs using successful wells from the previous year as weights. The indices were then calculated by dividing the operating costs for each year by the operating cost for 1997.

Lower 48 Onshore Wells Forecasting Equations

For each onshore Lower 48 region, the number of wells drilled by well class and fuel type is forecasted generally as a function of the expected profitability, proxied by the expected DCF, of a representative well of class i, in region r, for fuel type k, in year t and expected industry cash flow. In some specific cases, however, the forecasting equations may use the lagged value of the expected DCF or a more aggregate form of the expected DCF.

The specific forms of the equations used in forecasting wells are given in Appendix B. These equations can be expressed in the following generalized form.

$$\text{WELLSON}_{i,r,k,t} = \exp(m0_{i,k} + m00_{i,r,k}) * \text{DCFON}_{i,r,k,t}^{m1_{i,r,k}} * (\text{CASHFLOW}_t * \text{REMAINRES}_{r,k,t})^{m2_{i,k}} * \text{WELLSON}_{i,r,k,t-1}^{p_{i,k}} * \exp(-\rho_{i,k} * (m0_{i,k} + m00_{i,r,k})) * \text{DCFON}_{i,r,k,t-1}^{-p_{i,k} * m1_{i,r,k}} * (\text{CASHFLOW}_{t-1} * \text{REMAINRES}_{r,k,t-1})^{-p_{i,k} * m2_{i,k}} \quad (11)$$

where,

WELLSON	=	lower 48 onshore wells drilled by class, region, and fuel type
DCFON	=	expected DCF for a representative onshore well of class i, in region r, for fuel type k, in year t
CASHFLOW	=	cash flow in year t
REMAINRES	=	the ratio of remaining undiscovered resources plus inferred reserves in year t and undiscovered resources plus inferred reserve estimates in 1977
m's, α 's	=	estimated parameters
ρ	=	estimated serial correlation parameter
i	=	well type
r	=	lower 48 regions
k	=	fuel type
t	=	year.

Successful and Dry Wells Determination

The number of successful wells in each category is determined by multiplying the forecasted number of total wells drilled in the category by the corresponding success rates. Specifically,

$$\text{SUCWELSON}_{i,r,k,t} = \text{WELLSON}_{i,r,k,t} * \text{SR}_{i,r,k}, \text{ for } i = 1, 2, r = \text{onshore regions}, k = 1 \text{ thru } 4 \quad (12)$$

where,

SUCWELSON	=	successful onshore lower 48 wells drilled
WELLSON	=	onshore lower 48 wells drilled
SR	=	drilling success rate
i	=	well type (1 = exploratory, 2 = development)
r	=	lower 48 onshore regions
k	=	fuel type (1 = oil, 2 = shallow gas, 3 = deep gas, 4 = tight sands gas)
t	=	year.

$$\text{DRYWELON}_{i,r,k,t} = \text{WELLSON}_{i,r,k,t} - \text{SUCWELSON}_{i,r,k,t}, \text{ for } i = 1, 2, r = \text{onshore regions}, k = 1 \text{ thru } 4 \quad (13)$$

Dry wells by class, region, and fuel type are calculated by:

where,

DRYWELON	=	number of dry wells drilled onshore
SUCWELSON	=	successful lower 48 onshore wells drilled by fuel type, region, and well type
WELLSON	=	onshore lower 48 wells drilled by fuel type, region, and well type
i	=	well type (1 = exploratory, 2 = development)
r	=	lower 48 onshore regions
k	=	fuel type (1 = shallow oil, 2 = deep oil, 3 = shallow gas, 4 = deep gas)
t	=	year.

Drilling, Lease Equipment, and Operating Cost Calculations

Three major costs classified within the OGSM are drilling costs, lease equipment costs, and operating costs (including production facilities and general/administrative costs). These costs differ among successful exploratory wells, successful developmental wells, and dry holes. The successful drilling and dry hole cost equations capture the impacts of complying with environmental regulations, drilling to greater depths, rig availability, and technological progress.

One component of the drilling equations that causes costs to increase is the number of wells drilled in the given year. But within the framework of the OGSM, the number of wells drilled cannot be determined until the costs are known. Thus, drilling is estimated as a function of price as generalized below:

$$\text{ESTWELLS}_t = \exp(b_0) * \text{POIL}_t^{b_1} * \text{PGAS}_t^{b_2} * \text{ESTWELLS}_{t-1}^\rho * \exp(-\rho * b_0) * \text{POIL}_{t-1}^{-\rho * b_1} * \text{PGAS}_{t-1}^{-\rho * b_2} \quad (14)$$

$$\text{ESTSUCWELLS}_t = \exp(c_0) * \text{POIL}_t^{c_1} * \text{PGAS}_t^{c_2} * \text{ESTSUCWELLS}_{t-1}^\rho * \exp(-\rho * c_0) * \text{POIL}_{t-1}^{-\rho * c_1} * \text{PGAS}_{t-1}^{-\rho * c_2} \quad (15)$$

where,

ESTWELLS	=	estimated total onshore lower 48 wells drilled
ESTSUCWELLS	=	estimated successful onshore lower48 wells drilled
POIL	=	average wellhead price of crude oil
PGAS	=	average wellhead price of natural gas
b0,b1,b2,c0,c1,c2	=	estimated parameters
ρ	=	estimated serial correlation parameter
t	=	year.

The estimated level of drilling is then used to calculate the rig availability. The calculation is given by:

$$\text{RIGSL48}_t = \exp(b_0) * \text{RIGSL48}_{t-1}^{b_1} * \text{REVRIG}_{t-1}^{b_2} \quad (16)$$

where,

RIGSL48	=	onshore lower 48 rigs
REVRIG	=	total drilling expenditures per rig
b0, b1, b2	=	estimated parameters
t	=	year.

Drilling Costs

In each period of the forecast, the drilling cost per successful well is determined by:

$$\text{DRILLCOST}_{r,k,t} = \exp(b_{0,r,k}) * \exp(b_{1,d,k}) * \exp(b_{2,r,k}) * \text{ESTWELLS}_t^{b_{3,k}} * \text{RIGSL48}_t^{b_{4,k}} * \exp(b_5 * \text{TIME}_t) \quad (17)$$

$$\text{DRYCOST}_{r,k,t} = \exp(b_{0,r,k}) * \exp(b_{1,d,k}) * \exp(b_{2,r,k}) * \text{ESTWELLS}_t^{b_{3,k}} * \text{RIGSL48}_t^{b_{4,k}} * \exp(b_5 * \text{TIME}_t) \quad (18)$$

where,

DRILLCOST	=	drilling cost per well
DRYCOST	=	drilling cost per dry well

ESTWELLS	=	estimated total onshore lower 48 wells drilled
RIGSL48	=	onshore lower 48 rigs
TIME	=	time trend - proxy for technology
r	=	OGSM lower 48 onshore region
k	=	fuel type (1 = shallow oil, 2 = deep oil, 3 = shallow gas, 4 = deep gas)
d	=	depth class
b0, b1, b2, b3, b4, b5	=	estimated parameters
t	=	year.

Lease Equipment Costs

In each period of the forecast, lease equipment costs per successful well are determined by:

$$LEQC_{r,k,t} = \exp(b0_{r,k}) * \exp(b1_k * DEPTH_{r,k,t}) * ESTSUCWELLS_t^{b2_k} * \exp(b3_k * TIME_t) \quad (19)$$

where,

LEQC	=	oil and gas well lease equipment costs
DEPTH	=	average well depth
ESTSUCWELLS	=	estimated lower 48 successful onshore wells
TIME	=	time trend - proxy for technology
€0, €1, €2	=	estimated parameters
r	=	OGSM lower 48 onshore region
k	=	fuel type (1=shallow oil, 2=deep oil, 3=shallow gas, 4=deep gas)
t	=	year.

Operating Costs

In each period of the forecast, operating costs per successful well are determined by:

$$OPC_{r,k,t} = \exp(b0_{r,k}) * \exp(b1_k * DEPTH_{r,k,t}) * ESTSUCWELLS_{t-1}^{b2_k} * \exp(b3_k * TIME_t) \quad (20)$$

where,

OPC	=	oil and gas well operating costs
ESTSUCWELLS	=	estimated lower 48 successful onshore wells
DEPTH	=	average well depth
TIME	=	time trend - proxy for technology
b0, b1, b2, b3	=	estimated parameters
r	=	OGSM lower 48 onshore region
k	=	fuel type (1=shallow oil, 2=deep oil, 3=shallow gas, 4=deep gas)
t	=	year.

The estimated wells, rigs, and cost equations are presented in their generalized form but the forecasting equations include a correction for first order serial correlation as shown in Appendix E.

Reserve Additions

The Reserve Additions algorithm calculates units of oil and gas added to the stocks proved and inferred reserves. Reserve additions are calculated through a set of equations accounting for new field discoveries, discoveries in known fields, and incremental increases in volumetric recovery that arise during the development phase. There is a 'finding rate' equation for each phase in each region and for each fuel type.

Each newly discovered field not only adds proved reserves but also a much larger amount of inferred reserves. Proved reserves are reserves that can be certified using the original discovery wells, while inferred reserves are those hydrocarbons that require additional drilling before they are termed proved. Additional drilling takes the form of other exploratory drilling and development drilling. Other exploratory and developmental drilling account for proved reserves added through new pools or extensions. The determinants of revisions and adjustments are not well understood and thus projecting net revisions and adjustments is somewhat problematic, particularly for natural gas. For example, a negative adjustment or revision can be recorded because of a change in ownership and, thus, not linked directly to drilling. Over the last 25 years, net natural gas revisions and adjustments have varied from a low of -2.2 trillion cubic feet to as much as 3.1 trillion cubic feet. Cumulative reserve additions from revisions and adjustments over the last 25 years have been about relatively small, 12 trillion cubic feet compared to about 150 trillion cubic feet from new discoveries and extensions. As a result, net revisions and adjustments of natural gas reserves are not projected.

The volumetric yield from a successful new field wildcat well is divided into proved reserves and inferred reserves. The proportions of reserves allocated to these categories are based on historical reserves growth statistics. Specifically, the allocation of reserves between proved and inferred reserves is based on the ratio of the initial reserves estimated for a newly discovered field relative to ultimate recovery from the field.⁸

Functional Forms

Oil or gas reserve additions from new field wildcats are a function of the cumulative new field discoveries, the initial estimate of recoverable resources for the fuel, and the rate of technological change.

Total successful exploratory wells are disaggregated into successful new field wildcats and other exploratory wells based on a historical ratio. For the rest of the chapter, successful new field wildcats will be designated by the variable SW1, other successful exploratory wells by SW2, and successful development wells by SW3.

Discoveries per successful new field wildcat are a function of drilling activity, average depth, a time trend that proxies the impact of technological change, and the estimated volume of remaining undiscovered resources. Specifically, the finding rate equation for new field wildcats is

$$FR1_{r,k,t} = e^{\alpha_{r,k}*(1-\rho_r)} * e^{\beta_{0r}*DEPTH_{r,k,t}} * e^{\beta_{1r}*SW1_{r,k,t}} * RESOURCE_{r,k,t}^{\delta_{r,k}} * FR1_{r,k,t-1}^{\rho_r} * e^{-\rho_r*\beta_{0r}*DEPTH_{r,k,t-1}} * e^{-\rho_r*\beta_{1r}*SW1_{r,k,t-1}} * RESOURCE_{r,k,t-1}^{-\rho_r*\delta_{r,k}} \quad (21)$$

where,

FR1	=	new field wildcats finding rate
DEPTH	=	average depth
SW1	=	number of successful new field wildcats
RESOURCE	=	remaining undiscovered resources

⁸A more complete discussion of the topic of reserve growth for producing fields can be found in Chapter 3 of *The Domestic Oil and Gas Recoverable Resource Base: Supporting Analysis for the National Energy Strategy*.

$\alpha, \beta_1, \beta_2, \delta$ = estimated parameters
 ρ = estimated serial correlation parameter
 r = region
 k = fuel type (oil or gas)
 t = year.

The above equation provides a rate at which undiscovered resources convert into proved and inferred reserves as a function of cumulative new field wildcats. Given an estimate for the ratio of ultimate recovery from a field relative to the initial proved reserve estimate, $X_{r,k}$, the $X_{r,k}$ reserve growth factor is used to separate newly discovered resources into either proved or inferred reserves. Specifically, the change in proved reserves from new field discoveries for each period is given by

$$\text{NRD}_{r,k,t} = \frac{1}{X_k} * \text{FR1}_{r,k,t} * \text{SW1}_{r,k,t} \quad (22)$$

where,

X = reserves growth factor
 NRD = additions to proved reserves from new field discoveries.

X is derived from historical data and it is assumed to be constant during the forecast period.

Reserves are converted from inferred to proved in a similar way as proved and inferred reserves are modeled as moving from the resource base as described above. The volumetric return to other exploratory and developmental wells is shown in the following equations.

$$\begin{aligned} \text{FR2}_{r,k,t} = & e^{\alpha_{r,k}} * (\text{OEXPWL}_{r,k,t} + \text{DEVWL}_{r,k,t})^{\beta_{1,k}} * \text{INFR}_{r,k,t}^{\beta_{3,k}} * e^{\beta_{4,k} * \text{year}_t} * \text{FR2}_{r,k,t-1}^{\rho_k} \\ & * e^{-\rho_k * \alpha_{r,k}} * (\text{OEXPWL}_{r,k,t-1} + \text{DEVWL}_{r,k,t-1})^{-\rho_k * \beta_{1,k}} * \text{INFR}_{r,k,t-1}^{-\rho_k * \beta_{3,k}} * e^{-\rho_k * \beta_{4,k} * \text{year}_{t-1}} \end{aligned} \quad (23)$$

where,

FR2 = other exploratory and developmental well finding rate
 OEXPWL = successful other exploratory wells
 DEVWL = successful developmental wells
 INFR = remaining inferred reserves
 $\alpha, \beta_1, \beta_2, \beta_3, \beta_4$ = estimated parameters
 ρ = estimated serial correlation parameter
 r = region
 k = fuel type (oil or gas)
 t = year

Crude oil net revisions and adjustments are given by

$$\begin{aligned} \text{REVISIONS}_{r,k,t} = & (e^{\alpha_{r,k}} * \left(\frac{\text{INFR}_{r,k,t} + \text{BOYRES}_{r,k,t}}{\text{BOYRES}_{r,k,t}} \right)^{\beta_{1,k}} * e^{\beta_{2,k} * \text{WHP}_{r,k,t}} * e^{\beta_{3,k} * \text{WHP}_{r,k,t}^2} \\ & * e^{\frac{\beta_{4,k} * \text{WHP}_{r,k,t}}{\text{WHP}_{r,k,t-1}} * e^{\beta_{5,k} * \text{CUMDWL}_{r,k,t}} - 1) * \text{BOYRES}_{r,k,t} \end{aligned} \quad (24)$$

where,

REVISIONS	=	net revisions and adjustments
INFR	=	remaining inferred reserves
BOYRES	=	beginning-of-year reserves
WHP	=	wellhead price
CUMDWL	=	cumulative successful development wells
$\alpha, \beta 1, \beta 2, \beta 3, \beta 4, \beta 5$	=	estimated parameters
r	=	region
k	=	fuel type (oil or gas)
t	=	year

Total reserve additions in period t are given by the following equation:

$$RA_{r,k,t} = \frac{1}{X_{r,k}} * FR1_{r,k,t} * SW1_{r,k,t} + FR2_{r,k,t} * SW2_{r,k,t} + REVISIONS_{r,k,t} \quad (25)$$

Finally, total end of year proved reserves for each period equals:

$$R_{r,k,t} = R_{r,k,t-1} - Q_{r,k,t} + RA_{r,k,t} \quad (26)$$

where,

R	=	reserves measured as of the end-of-year
Q	=	production.

Production to Reserves Ratio

The production of nonassociated gas in NEMS is modeled at the “interface” of NGTDM and OGSM while oil production⁹ is determined within the OGSM. In both cases, the determinants of production include the lagged production to reserves (PR) ratio and price. The PR ratio, as the relative measure of reserves drawdown, represents the rate of extraction, given any stock of reserves.

For each year t, the PR ratio is calculated as:

$$PR_t = \frac{Q_t}{R_{t-1}} \quad (27)$$

where,

PR_t	=	production to reserves ratio for year t
Q_t	=	production in year t (received from the NGTDM and the PMM)
R_{t-1}	=	end of year reserves for year (t-1) or equivalently, beginning of year reserves for year t.

⁹Electricity cogeneration and capacity associated with production from enhance oil recovery techniques is held constant at an average historical level.

PR_t represents the rate of extraction from all wells drilled up to year t (through year t-1). To calculate the expected rate of extraction in year (t+1), the model combines production in year t with the reserve additions and the expected extraction rate from new wells drilled in year t. The calculation is given by:

$$PR_{t+1} = \frac{(R_{t-1} * PR_t * (1 - PR_t)) + (PRNEW * RA_t)}{R_t} \quad (28)$$

where,

$$\begin{aligned} PR_{t+1} &= \text{expected production to reserves ratio for year (t+1)} \\ PRNEW &= \text{long-term expected production to reserves ratio for all wells drilled in forecast} \\ R_t &= \text{end of year reserves for year t or equivalently, beginning of year reserves for year (t+1).} \end{aligned}$$

The numerator, representing expected total production for year t+1, comprises the sum of two components. The first represents production from proved reserves as of the beginning of year t. This production is the expected production in year t, $R_{t-1} * PR_t$, adjusted by $1 - PR_t$ to reflect the normal decline from year t to t+1. The second represents production from reserves discovered in year t. No production in year t+1 is assumed from reserves discovered in year t+1.

PR_t is constrained not to vary from PR_{t-1} by more than 10 percent. It is also constrained not to exceed 30 percent.

The values for R_t and PR_{t+1} for natural gas are passed to the NGTDM for use in their market equilibration algorithms and for crude oil are passed to a subroutine in OGSM, both of which solve for equilibrium production and prices for year (t+1) of the forecast using the following short-term supply function:

$$Q_{r,k,t+1} = [R_{r,k,t}] * [PR_{r,k,t} * (1 + \beta_{r,k} * \Delta P_{r,k,t+1})] \quad (29)$$

where,

$$\begin{aligned} R_t &= \text{end of year reserves in period t} \\ PR_t &= \text{extraction rate in period t} \\ \beta &= \text{estimated short run price elasticity of supply} \\ \Delta P_{t+1} &= (P_{t+1} - P_t) / P_t, \text{ proportional change in price from t to t+1.} \end{aligned}$$

The P/R ratio for period t, PR_t , is assumed to be the approximate extraction rate for period t+1 under normal operating conditions. The product ($R_{r,k,t} * PR_t$) is the expected, or normal, operating level of production for period t+1. Actual production in t+1 will deviate from expected depending on the proportionate change in price from period t and on the value of short run price elasticity. Documentation of the equations used to estimate β is provided in Appendix E.

Associated Dissolved Gas

Associated dissolved (AD) gas production is estimated as a function of crude oil production. The basic form of the equation is given as:

$$ADGAS_{r,t} = e^{\ln(\alpha)_r} * OILPROD_{r,t}^\beta \quad (30)$$

where,

ADGAS = associated dissolved gas production
OILPROD = crude oil production
r = OGSM region
t = year
 α, β = estimated parameters.

This simple regression function is used in the estimation of AD gas production in onshore regions 1 through 4. A time dummy is introduced in onshore regions 5 and 6 and offshore regions of California and the Gulf of Mexico to represent loosening of restrictions on capacity and changes in regulation. Specifically,

$$ADGAS_{r,t} = e^{\ln(\alpha_0)_t + \ln(\alpha_1)_t * DUM86_t} * OILPROD_{r,t}^{\beta_0 + \beta_1 * DUM86_t} \quad (31)$$

where,

DUM86 = dummy variable (1 if $t > 1985$, otherwise 0)
 $\alpha_0, \alpha_1, \beta_0, \beta_1$ = estimated parameters.

Unconventional Gas Recovery Supply Submodule

This section describes the basic structure of the Unconventional Gas Recovery Supply Submodule (UGRSS). The UGRSS is designed to project gas production from unconventional gas deposits. This section provides an overview of the basic modeling approach. A more detailed description of the methodology is presented in Appendix 3-B and an in depth view of the treatment of technology in the UGRSS is provided in Appendix 3-C.

The UGRSS is a play level model that specifically analyzes the three major unconventional resources - coalbed methane, tight gas sands, and gas shales. The UGRSS calculates the economic feasibility of individual plays based on locally specific wellhead prices and costs, resource quantity and quality, and the various effects of technology on both resources and costs. In each year an initial resource characterization determines the expected ultimate recovery (EUR) for the wells drilled in a particular play. Resource profiles are adjusted to reflect assumed technological impacts on the size, availability, and industry knowledge of the resources in the play. Subsequently, prices received from the NGTDM and endogenously determined costs adjusted to reflect technological progress are utilized to calculate the economic profitability (or lack thereof) for the play. If the play is profitable, drilling occurs according to an assumed schedule, which is adjusted annually to account for technological improvements, as well as varying economic conditions. This drilling results in reserve additions, the quantities of which are directly related to the EUR's for the wells in that play. Given these reserve additions, reserve levels and ("expected") production-to-reserves (P/R) ratios are recalculated at the NGTDM region level. The resultant values are sent to OGSM, where they are aggregated with similar values from the other submodules. The aggregate P/R ratios and reserve levels are then passed to the NGTDM, which determines through market equilibration the prices and production for the following year.

Offshore Supply Submodule

This section describes the basic structure of the Offshore Oil and Gas Supply Submodule (OOGSS). The OOGSS is designed to project the exploration and development of U.S. offshore oil and natural gas resources. As described in previous sections, annual production is not determined within the OOGSS but rather the parameters for the short-term supply functions that are used in the market equilibration routine within the NGTDM and PMM. This section provides an overview of the basic approach. A more detailed description of the methodology is presented in Appendix 3-D as well as a discussion of the characterization of the undiscovered resource base and the various technology options for offshore exploration, development, and production practices incorporated in the OOGSS.

The OOGSS simulates the economic decision-making at each stage of development from frontier areas to post-mature areas. Offshore petroleum resources are divided into 3 categories: (1) undiscovered fields, (2) discovered, undeveloped fields, and (3) producing fields. Resource and economic calculations are performed at an evaluation unit basis. An evaluation unit is defined as the area within a planning area that falls into a specific water depth category. Planning areas are the Western Gulf of Mexico (GOM), Central GOM, Eastern GOM, Pacific, and Atlantic. There are five water depth categories: 0-200 meters, 200-800 meters, 800-1600 meters, 1600-2400 meters, and greater than 2400 meters.

Supply curves for crude oil and natural gas are generated for four offshore regions: Pacific, Atlantic, shallow GOM (water depth less than 200 meters), and deep GOM (water depth greater than 200 meters). Crude oil production includes oil condensate. Natural gas production accounts for both nonassociated gas and associate/dissolved gas. The model is responsive to changes in oil and natural gas prices, royalty relief assumptions, oil and natural gas resource base, and technological improvements affecting exploration and development.


Alaska Oil and Gas Supply Submodule

This section describes the structure for the Alaska Oil and Gas Supply Submodule (AOGSS). The AOGSS is designed to project field-specific oil and gas production from the Onshore North Slope, Offshore North Slope, and Other Alaska (primarily the Cook Inlet area). The North Slope region encompasses the National Petroleum Reserve Alaska in the west, the State Lands in the middle, and the Alaskan National Wildlife Refuge area in the east. This section provides an overview of the basic approach including a discussion of the discounted cash flow (DCF) method.

AOGSS Overview

The AOGSS is divided into three components: new field discoveries, development projects, and producing fields (Figure 5). Transportation costs are used in conjunction with the relevant market price of oil or gas to calculate the estimated net price received at the wellhead, sometimes called the netback price. A discounted cash flow (DCF) method is used to determine the economic viability of each project at the netback price. Alaskan oil and gas supplies are modeled on the basis of discrete projects, in contrast to the Onshore Lower 48 conventional oil and gas supplies, which are modeled on an aggregate level. The continuation of the exploration and development of multi-year projects, as well as the discovery of a new field is dependent on its profitability. Production is determined on the basis of assumed drilling schedules and production profiles for new fields and developmental projects, and historical production patterns and announced plans for currently producing fields.

Figure 5. Flowchart for the Alaska Oil and Gas Supply Module

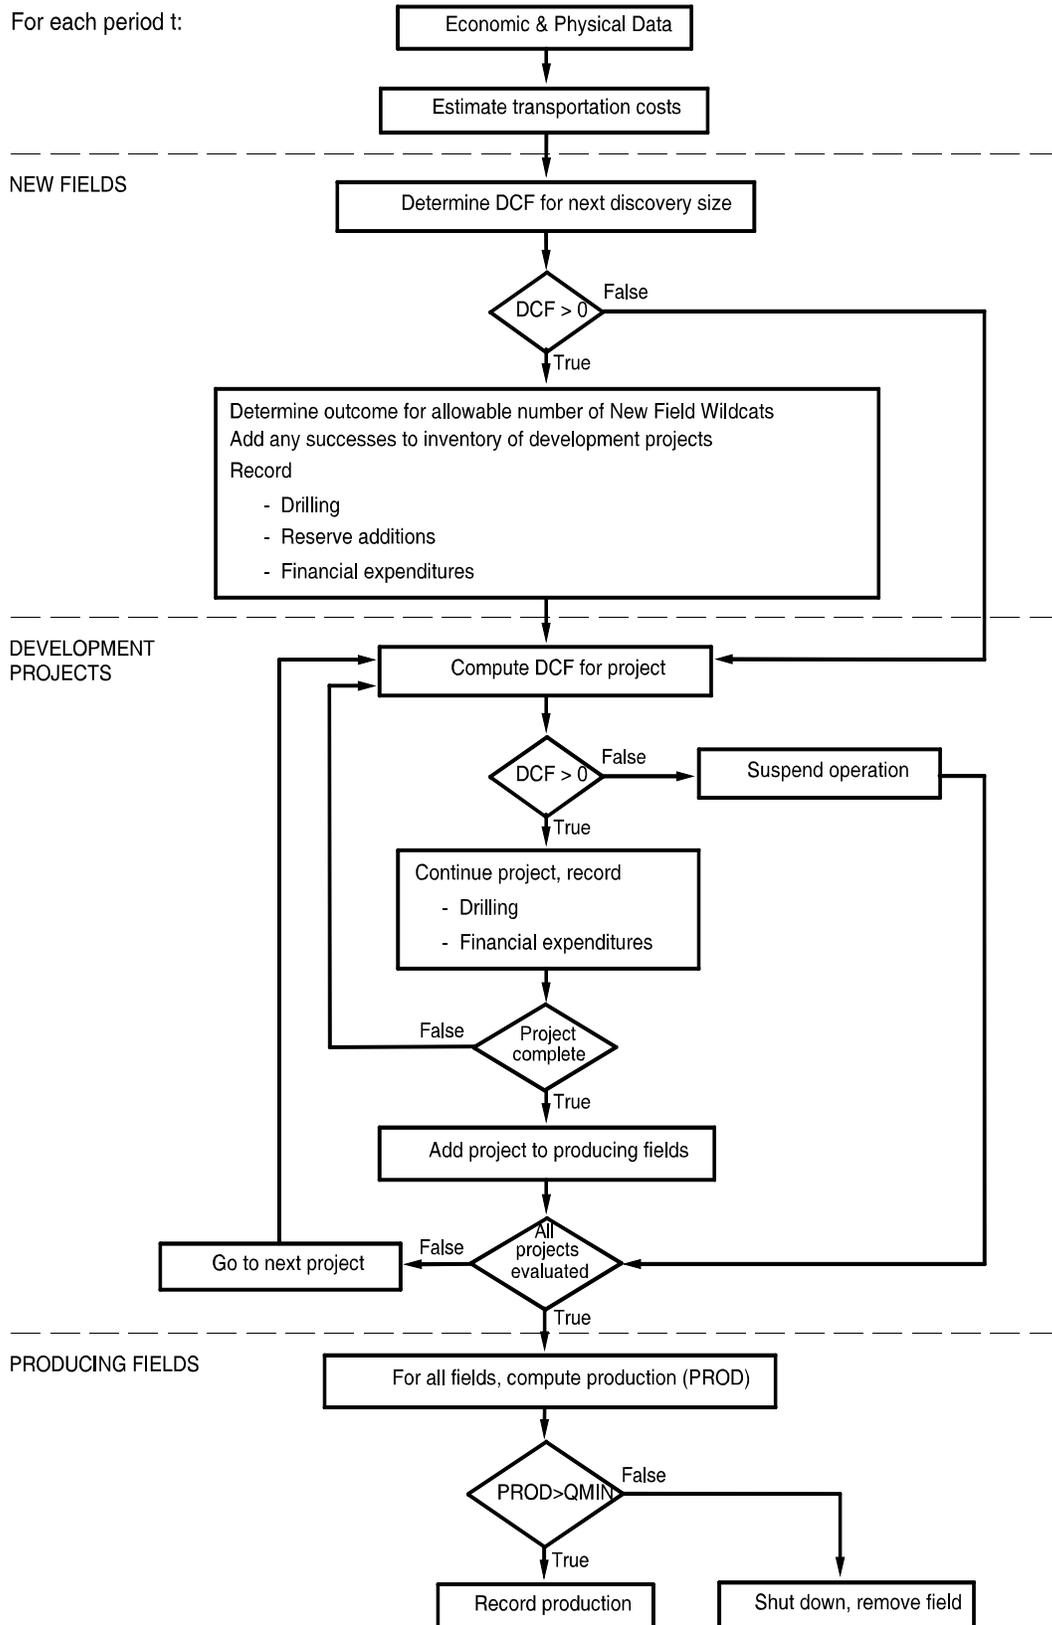

Calculation of Costs

Costs differ within the model for successful wells and dry holes. Costs are categorized functionally within the model as:

- Drilling costs,
- Lease equipment costs, and
- Operating costs (including production facilities and general and administrative costs).

All costs in the model incorporate the estimated impact of environmental compliance. Whenever environmental regulations preclude a supply activity outright, that provision is reflected in other adjustments to the model. For example, environmental regulations that preclude drilling in certain locations within a region are modeled by reducing the recoverable resource estimates for that region.

Each cost function includes a variable that reflects the cost savings associated with technological improvements. As a result of technological improvements, average costs decline in real terms relative to what they would otherwise be. The degree of technological improvement is a user specified option in the model. The equations used to estimate costs are similar to those used for the lower 48, but include cost elements that are specific to Alaska. For example, lease equipment includes gravel pads and ice roads.

Drilling Costs

Drilling costs are the expenditures incurred for drilling both successful wells and dry holes, and for equipping successful wells through the "Christmas tree," the valves and fittings assembled at the top of a well to control the fluid flow. Elements that are included in drilling costs are labor, material, supplies and direct overhead for site preparation, road building, erecting and dismantling derricks and drilling rigs, drilling, running and cementing casing, machinery, tool changes, and rentals. Drilling costs for exploratory wells include costs of support equipment such as ice pads. Lease equipment required for production is included as a separate cost calculation, and covers equipment installed on the lease downstream from the Christmas tree.

The average cost of drilling a well in any field located within region r in year t is given by:

$$\text{DRILLCOST}_{i,r,k,t} = \text{DRILLCOST}_{i,r,k,T_b} * (1 - \text{TECH1})^{*(t-T_b)} \quad (32)$$

where,

I	=	well class(exploratory=1, developmental=2)
r	=	region (Offshore North Slope = 1, Onshore North Slope = 2, Cook Inlet = 3)
k	=	fuel type (oil=1, gas=2)
t	=	forecast year
DRILLCOST	=	drilling costs
T_b	=	base year of the forecast
TECH1	=	annual decline in drilling costs due to improved technology.

The above function specifies that drilling costs decline at the annual rate specified by TECH1. Drilling costs are not modeled as a function of the activity level as they are in the Onshore Lower 48 methodology.

Drilling rigs and equipment are designed specifically for the harsh Arctic weather conditions. Once this equipment is moved up to Alaska, it is too expensive to transport back to the lower 48. Consequently, company drilling programs in Alaska are planned to operate at a relatively constant level of activity because of limited number of drilling rigs and equipment available for use.

Lease Equipment Costs

Lease equipment costs include the cost of all equipment extending beyond the Christmas tree, directly used to obtain production from a drilled lease. Costs include: producing equipment, the gathering system, processing equipment (e.g., oil/gas/water separation), and production related infrastructure such as gravel pads. Producing equipment costs include tubing, pumping equipment. Gathering system costs consist of flowlines and manifolds. The lease equipment cost estimate for a new oil or gas well is given by:

$$\text{EQUIP}_{r,k,t} = \text{EQUIP}_{r,k,T_b} * (1 - \text{TECH2})^{*(t - T_b)} \quad (33)$$

where,

- r = region (Offshore North Slope = 1, Onshore North Slope = 2, Cook Inlet = 3)
- k = fuel type (oil=1, gas=2)
- t = forecast year
- EQUIP = lease equipment costs
- T_b = base year of the forecast
- TECH2 = annual decline in lease equipment costs due to improved technology.

Operating Costs

EIA operating cost data, which are reported on a per well basis for each region, include three main categories of costs: normal daily operations, surface maintenance, and subsurface maintenance. Normal daily operations are further broken down into supervision and overhead, labor, chemicals, fuel, water, and supplies. Surface maintenance accounts for all labor and materials necessary to keep the service equipment functioning efficiently and safely. Costs of stationary facilities, such as roads, also are included. Subsurface maintenance refers to the repair and services required to keep the downhole equipment functioning efficiently.

The estimated operating cost curve is:

$$\text{OPCOST}_{r,k,t} = \text{OPCOST}_{r,k,T_b} * (1 - \text{TECH3})^{*(t - T_b)} \quad (34)$$

where,

- r = region (Offshore North Slope = 1, Onshore North Slope = 2, Cook Inlet = 3)
- k = fuel type (oil=1, gas=2)
- t = forecast year
- OPCOST = operating cost
- T_b = base year of the forecast
- TECH3 = annual decline in operating costs due to improved technology.

Drilling costs, lease equipment costs, and operating costs are integral components of the following discounted cash flow analysis. These costs are assumed to be uniform across all fields within each of the three Alaskan regions.

Treatment of Costs in the Model for Income Tax Purposes

All costs are treated for income tax purposes as either expensed or capitalized. The tax treatment in the DCF reflects the applicable provisions for oil and gas producers. The DCF assumptions are consistent with standard accounting methods and with assumptions used in similar modeling efforts. The following assumptions, reflecting current tax law, are used in the calculation of costs.

- All dry-hole costs are expensed.
- A portion of drilling costs for successful wells are expensed. The specific split between expensing and amortization is based on the tax code.
- Operating costs are expensed.
- All remaining successful field development costs are capitalized.
- The depletion allowance for tax purposes is not included in the model, because the current regulatory limitations for invoking this tax advantage are so restrictive as to be insignificant in the aggregate for future drilling decisions.
- Successful versus dry-hole cost estimates are based on historical success rates of successful versus dry-hole footage.
- Lease equipment for existing wells is in place before the first forecast year of the model.

Discounted Cash Flow Analysis

A discounted cash flow (DCF) calculation is used to determine the profitability of oil and gas projects.¹⁰ A positive DCF is necessary to continue operations for a known field, whether exploration, development, or production. Selection of new prospects for initial exploration occurs on the basis of the profitability index which is measured as the ratio of the expected discounted cash flow to expected capital costs for a potential project.

A key variable in the DCF calculation is the transportation cost to lower 48 markets. Transportation costs for Alaskan oil include both pipeline and tanker shipment costs, while natural gas transportation costs are strictly pipeline costs (tariffs) to the lower 48. Transportation costs are specified for each field, based on the fuel type (i.e., oil or gas) and on the transportation cost of that fuel for that region. This cost directly affects the expected revenues from the production of a field as follows:¹¹

$$\text{REV}_{f,t} = Q_{f,t} * (\text{MP}_t - \text{TRANS}_t) \quad (35)$$

where,

f	=	field
t	=	year
REV	=	expected revenues
Q	=	expected production volumes

¹⁰See Appendix 4.A at the end of this chapter for a detailed discussion of the DCF methodology.

¹¹This formulation assumes oil production only. It can be easily expanded to incorporate the sale of natural gas.

MP = market price in the lower 48 states
 TRANS = transportation cost.

The expected discounted cash flow associated with a representative oil or gas project in a field f at time t is given by:

$$DCF_{ft} = (PVREV - PVROY - PVDRIILLCOST - PVEQUIP - TRANSCAP - PVOPCOST - PVPRODTAX - PVSIT - PVFIT - PVWPT)_{ft} \quad (36)$$

where,

PVREV = present value of expected revenues
 PVROY = present value of expected royalty payments
 PVDRIILLCOST = present value of all exploratory and developmental drilling expenditures
 PVEQUIP = present value of expected lease equipment costs
 TRANSCAP = cost of incremental transportation capacity
 PVOPCOST = present value of operating costs
 PVPRODTAX = present value of expected production taxes (ad valorem and severance taxes)
 PVSIT = present value of expected state corporate income taxes
 PVFIT = present value of expected federal corporate income taxes
 PVWPT = present value of expected windfall profits tax¹²

The expected capital costs for the proposed field f located in region r are:

$$COST_{ft} = (PVEXPCOST + PVDEVCOST + PVEQUIP + TRANSCAP)_{ft} \quad (37)$$

where,

PVEXPCOST = present value exploratory drilling costs
 PVDEVCOST = present value developmental drilling costs
 PVEQUIP = present value lease equipment costs
 TRANSCAP = cost of incremental transportation capacity

The profitability indicator from developing the proposed field is therefore equal to:

$$PROF_{ft} = DCF_{ft} / COST_{ft} \quad (38)$$

The field with the highest positive PROF in time t is then eligible for exploratory drilling in the same year. The profitability indices for Alaska also are passed to the basic framework module of the OGSM.

New Field Discovery

Development of estimated recoverable resources, which are expected to be in currently undiscovered fields, depends on the schedule for the conversion of resources from unproved to reserve status. The conversion of resources into reserves requires a successful new field wildcat well. The discovery procedure can be determined endogenously or supplied at the option of the user. The procedure requires data regarding:

¹²Since the Windfall Profits Tax was repealed in 1988, this variable would normally be set to zero. It is included in the DCF calculation for completeness.

- technically recoverable oil and gas resource estimates by region,
- distribution of technically recoverable field sizes¹³ within each region,
- the maximum number of new field wildcat wells drilled in any year,
- new field wildcat success rate, and
- any restrictions on the timing of drilling.

The endogenous procedure generates:

- the set of individual fields to be discovered, specified with respect to size and location,
- an order for the discovery sequence, and
- a schedule for the discovery sequence.

The new field discovery procedure divides the estimate for technically recoverable oil and gas resources into a set of individual fields. The field size distribution data is obtained from U.S. Geological Survey estimates.¹⁴ The field size distribution is used to determine a largest field size based on the volumetric estimate corresponding to an acceptable percentile of the distribution. The remaining fields within the set are specified such that the distribution of estimated sizes conform to the characteristics of the input distribution. Thus, this estimated set of fields is consistent with the expected geology with respect to expected aggregate recovery and the relative frequency of field sizes.

New field wildcat drilling depends on the estimated expected DCF for the set of remaining undiscovered recoverable prospects. If the DCF for each prospect is not positive, no new drilling occurs. Positive DCF's motivate additional new field wildcat drilling. Drilling in each year matches the maximum number of new field wildcats. A discovery occurs as indicated by the success rate; i.e., a success rate of 12.5 percent means that there is one discovery in each sequence of eight wells drilled. By assumption, the first new field well in each sequence is a success. The requisite number of dry holes must be drilled prior to the next successful discovery.

The execution of the above procedure can be modified to reflect restrictions on the timing of discovery for particular fields. Restrictions may be warranted for enhancements such as delays necessary for technological development needed prior to the recovery of relatively small accumulations or heavy oil deposits. State and Federal lease sale schedules would also restrict the earliest possible date for beginning the development of certain fields. This refinement is implemented by declaring a start date for possible exploration. For example, AOGSS specifies that if Federal leasing in Alaskan National Wildlife Refuge were permitted, then the earliest possible development date would be 2011. Another example is the development of the West Sak field is expected to be delayed until technology can be developed that will enable the heavy crude oil of that field to be economically extracted.

¹³"Size" of a field is measured by the volume of recoverable oil (in barrels) or gas (in cubic feet).

¹⁴*Estimates of Undiscovered Conventional Oil and Gas Resources in the United States -- A Part of the Nation's Energy Endowment*, USGS (1989); and *Arctic National Wildlife Refuge, 1002 Area, Petroleum Assessment, 1998, Including Economic Analysis*, USGS (April 2001); and *U.S. Geological Survey 2002 Petroleum Resource Assessment of the National Petroleum Reserve in Alaska (NPRA)* USGS (2002).

Development Projects

Development projects are those projects in which a successful new field wildcat has been drilled. As with the new field discovery process, the DCF calculation plays an important role in the timing of development and exploration of these multi-year projects.

Each model year, the DCF is calculated for each potential development project. Initially, the drilling schedule is determined by the user or some set of specified rules. However, if the DCF for a given project is negative, then exploration and development of this project is suspended in the year in which this occurs. The DCF for each project is evaluated in subsequent years for a positive value; at which time, exploration and development will resume.

Production from developing projects follows the generalized production profile developed for and described in previous work conducted by DOE staff.¹⁵ The specific assumptions used in this work are as follows:

- a 2- to 4-year build-up period from initial production to peak rate,
- peak rate sustained for 3 to 8 years, and
- production rates decline by 5 to 18 percent per year, for known fields under development, after production declines below the peak rate; unknown fields decline by 10 percent per year.

The pace of development and the ultimate number of wells drilled for a particular field is based on the historical field-level profile adjusted for field size and other characteristics of the field (e.g. API gravity.)

After all exploratory and developmental wells have been drilled for any given project, development of the project is complete. For this version of the AOGSS, no constraint is placed on the number of exploratory or developmental wells that can be drilled for any project. All completed projects are added to the inventory of producing fields.

Development fields include fields that have already been explored, but that have not begun production. These fields include, for example, a series of expansion fields in the Prudhoe Bay area, and a series of fields in the National Petroleum Reserve, Alaska (NPRA). For these fields, the starting date of production was not determined by the discovery process outlined above, but is based upon estimates of when these fields will come into production, from both the state of Alaska and EIA. (*2000 Annual Report*, Alaska Department of Natural Resources, Division of Oil and Gas, 2000, and *Future Oil Production for the Alaska North Slope*, EIA, Office of Oil and Gas, DOE/EIA-0627, May 2001.)

Producing Fields

Oil and natural gas production from fields producing as of the base year (e.g., Prudhoe Bay, Kuparuk, Lisburne, Endicott, and Milne Point) are based on historical production patterns, remaining estimated recovery, and announced development plans. Production ceases when flow becomes subeconomic; i.e., attains the assumed minimum economic production level.

The percent of oil in-place recovered from a North Slope producing field is determined by prevailing world oil prices. The North Slope oil fields produce predominantly low to medium gravity oils. The percent recovery of North Slope oil in-place depends upon the extent to which the petroleum companies drill and

¹⁵*Potential Oil Production from the Coastal Plain of the Arctic National Wildlife Refuge: Updated Assessment*, EIA (May 2000) and *Alaska Oil and Gas - Energy Wealth of Vanishing Opportunity?*, DOE/ID/0570-H1 (January 1991).

operate new infill water injectors and production wells to produce these low to middle quality oils. Higher oil prices increase the percent recovery of the oil in-place by encouraging North Slope oil producers to increase their infill drilling and to inject more water. Because Prudhoe Bay oil field is the largest and most typical middle gravity oil field on the North Slope, the impact of oil prices on the recovery of in-place resources for middle gravity oil fields was based on an expected recovery rate of 45 percent at \$25 per barrel for Prudhoe Bay. At oil prices of \$10 per barrel or below, the minimum recovery factor for the middle gravity oil in-place oil is 35 percent, which linearly increases to maximum recovery of 55 percent \$40 per barrel and above. For the North Slope heavy oil fields (i.e., low gravity oil) 10 percent recovery of the in-place oil is expected at \$25 per barrel. At \$10 per barrel or less, the minimum recovery drops to 7.5 percent for a heavy oil field. At \$40 per barrel or more, the maximum recovery increases to 12.5 percent for a heavy oil field.

Natural gas production from the North Slope for sale to end-use markets depends on the construction of a pipeline to transport natural gas to lower 48 markets.¹⁶ In addition, the reinjection of North Slope gas for increased oil recovery poses an operational/economic barrier limiting its early extraction. Nonetheless, there are no extraordinary regulations or legal constraints interfering with the recovery and use of this gas. Thus, the modeling of natural gas production for marketing in the lower 48 states recognizes the expected delay to maximize oil recovery, but it does not require any further modifications from the basic procedure.¹⁷

Over the forecast period, Alaskan natural gas production is limited to natural gas resources in the Prudhoe Bay field and the adjacent Port Thompson field. In all, these fields have estimated reserves of 35 trillion cubic feet of natural gas.¹⁸ Of this, EIA has estimated that 26 trillion cubic feet could be produced with only a minor impact on North Slope oil production. All Alaska North Slope natural gas production in the EIA forecast is limited to this 26 Tcf of stranded gas reserves. EIA estimates that this already discovered gas requires a return of at least \$0.80 per thousand cubic feet at the wellhead before these reserves would be developed.

Foreign Natural Gas Supply Submodule

This section describes the structure for the Foreign Natural Gas Supply Submodule (FNGSS) within the Oil and Gas Supply Module (OGSM). FNGSS includes U.S. trade in foreign natural gas via either the North American pipeline network or ocean-going tankers.¹⁹ Gas is traded with Canada and Mexico via pipelines. The border crossing locations are identified in Figure 6. Gas trade with other, nonadjacent, countries is in the form of liquefied natural gas (LNG) and involves liquefaction, transportation by tanker and subsequent regasification. To date, the United States has imported LNG from Algeria, Australia, Indonesia, Malaysia, Nigeria, Oman, Qatar, Trinidad and Tobago, and the United Arab Emirates.

A representation of Canadian gas reserves accounting and well development has been established. Since forecasts of fixed volumes are not adequate for the purposes of equilibrating supply and demand, this submodule provides the Natural Gas Transmission and Distribution Module (NGTDM) with a supply function of Canadian gas at the western Canadian supply point. With the help of these supply parameters,


¹⁶Initial natural gas production from the North Slope for Lower 48 markets is affected by a delay reflecting a reasonable period for construction.

¹⁷The currently proposed version of AOGSS does not include plans for an explicit method to deal with the issue of marketing ANS gas as liquefied natural gas (LNG) exports to Pacific Rim countries. The working assumption is that sufficient recoverable gas resources are present to support the economic operation of both a marketing system to the Lower 48 States and the LNG export project.

¹⁸*Alaska Gas: Clean Energy for the Future*, British Petroleum, 2001.

¹⁹The issue of foreign gas trade generally is viewed as one of supply (to the United States) because the United States is currently a net importer of natural gas by a wide margin, a situation that is expected to continue.

Figure 6. Foreign Natural Gas Trade via Pipeline

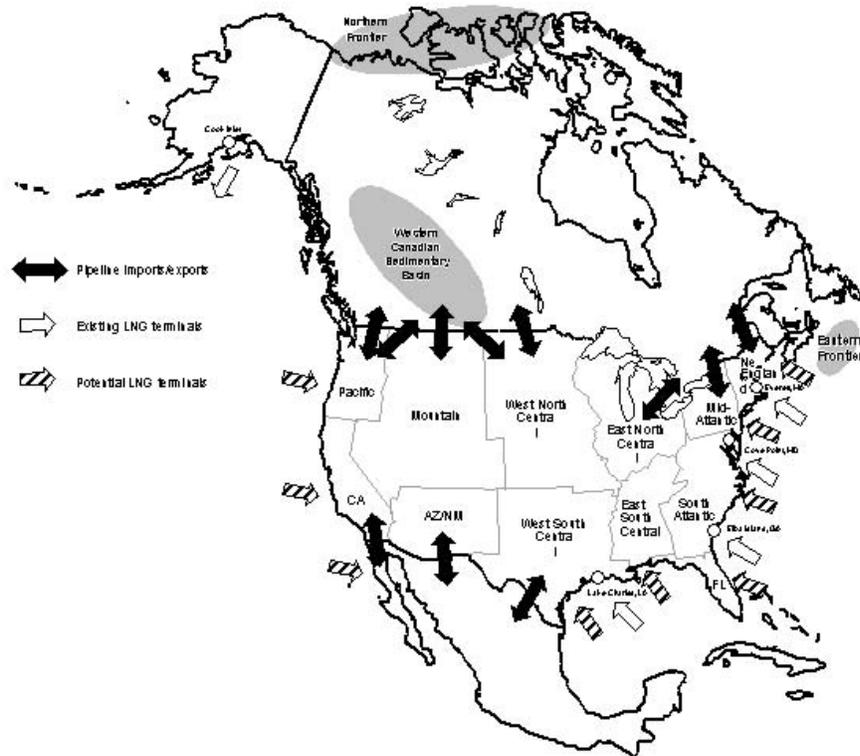

Canadian imports to the United States are defined by the North American market equilibration that occurs in the NGTDM. Natural gas imports via pipeline from Mexico are handled with less detail. LNG imports are modeled on the basis of importation costs, including production, liquefaction, transportation, and regasification. Projected imports of LNG are subject to user assumptions regarding the timing and size of available import capacity. Natural gas LNG and Canadian exports are included in the National Energy Modeling System (NEMS) as exogenous assumptions. Exports to Mexico are determined endogenously. This section presents descriptions of the separate methodological approaches used to represent Canadian, Mexican, and LNG natural gas trade.

Canadian Gas Trade

This submodule determines the components and the subsequent parameters needed to define the Western Canadian conventional natural gas price/supply curve used by the NGTDM to help determine Canadian import levels. Canadian production is represented for three regions in the NEMS -- the Western Canadian Sedimentary Basin (WCSB, including Alberta, British Columbia, and Saskatchewan), the Northern Frontier (Arctic Islands and MacKenzie Delta), and Eastern Canada. Production from the WCSB is further disaggregated into conventional and unconventional (coalbed methane) production. Eastern Canadian production is set exogenously in the NGTDM. Baseline production levels for unconventional production are effectively set exogenously in the NGTDM as well, but are allowed to vary in the NGTDM in response

to variations in the realized price. Gas production from the MacKenzie Delta is dependent on the construction of a pipeline to Alberta, which is also determined by the NGTDM and documented separately.

The approach taken to determine WCSB gas supplies differs from that used in the domestic submodules of the OGSM. Drilling activity, measured as the number of successful natural gas wells drilled, is estimated directly as a function of the Western Canadian natural gas wellhead price, rather than as a function of expected profitability proxied by the expected DCF. No distinction is made between exploration and development. Next, an exponentially declining finding rate is applied to the successful wells to determine reserve additions; a reserves accounting procedure yields reserve estimates (beginning of year reserves); and an estimated extraction rate determines production potential [production to reserves ratio (PRR)]. The general methodology employed for estimating potential conventional Canadian gas production from the WCSB is depicted in Figure 7. Production from unconventional sources (i.e., coalbed methane, largely in Western Canada) is handled within the NGTDM as an assumed production function dependent on price.

The determination of the import volumes into the United States occurs in the equilibration process of the NGTDM, utilizing the WCSB supply curve parameters, unconventional and eastern Canadian production, gas from the MacKenzie Delta, as well as Canadian demand estimates. Forecasts of Canadian consumption are set at levels published in EIA's *International Energy Outlook 2003*.


Conventional Gas from the Western Canadian Sedimentary Basin

Wells Determination

The total number of successful conventional natural gas wells drilled in Western Canada each year is forecasted econometrically as a function of the Canadian natural gas wellhead price as follows:

$$\text{SUCWELL}_t = e^{\beta_0} * \text{GPRICE}_t^{\beta_1} * \text{SUCWELL}_{t-1}^{\beta_2} * e^{\beta_3} * \text{GPRICE}_{t-1}^{\beta_4} \quad (39)$$

Figure 7. A General Outline of the Canadian Algorithm of the FNGSS

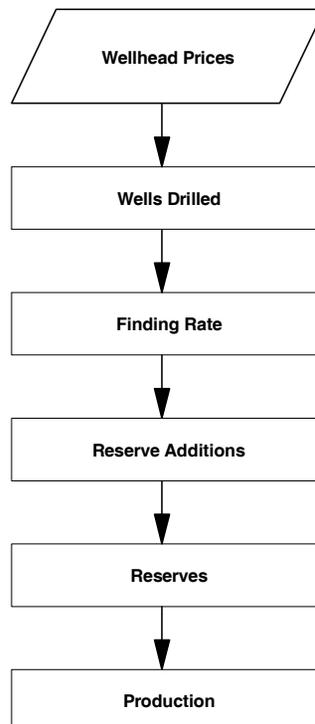

where,

SUCWELL _t	=	total conventional successful gas wells completed in Western Canada in year t
GPRICE _t	=	price per Mcf of natural gas in 1987 US dollars in year t
OGPRDCAN _{t-1}	=	conventional gas production in the previous forecast year (million cubic feet)
β ₀	=	econometrically estimated parameter (7.57685, Appendix E)
β ₁	=	econometrically estimated parameter (0.921915, Appendix E)
β ₂	=	econometrically estimated parameter (0.816442, Appendix E)
β ₂	=	econometrically estimated parameter (-0.816442*7.57685, Appendix E)
β ₂	=	econometrically estimated parameter (-0.816442*0.921915, Appendix E)

Reserve Additions

The reserve additions algorithm calculates units of gas added to Western Canadian Sedimentary Basin proved reserves. The methodology for conversion of gas resources into proved reserves is a critically important aspect of supply modeling. The actual process through which gas becomes proved reserves is a highly complex one. This section presents a methodology that is representative of the major phases that occur; although, by necessity, it is a simplification from a highly complex reality.

Gas reserve additions are calculated using a finding rate equation. Typical finding rate equations relate reserves added to wells or feet drilled in such a way that the rate of reserve additions declines as more wells are drilled. The reason for this is, all else being constant, the larger prospects typically are drilled first. Consequently, the finding rate can be expected to decline as a region matures, although the rate of decline and the functional forms are a subject of considerable debate. In previous versions of the model an attempt was made to estimate this equation; while the latest version is assumption based. Canadian gas reserve additions are a function of the cumulative number of successful wells drilled, the recoverable resource base (including inferred resources), and the rate of technological progress. The finding rate for gas is defined by:

$$\text{FRCAN}_t = \text{FRCAN}_{t-1} * e^{(-\text{deltacan}_t * \text{SUCWELL}_t)} * (1 + \text{FRTECH}) \quad (40)$$

where,

FRCAN	=	finding rate
SUCWELL _t	=	successful gas wells drilled in year t
deltacan _t	=	finding rate decline parameter in year t (>0)
FRTECH	=	finding rate technology factor (=0.03)

In this specification, the yield from successful drilling begins at the initial finding rate for each period (FRCAN_{t-1}) and declines exponentially as drilling continues. However, technological progress can reduce or even reverse this decline. The decline parameter (deltacan) is set as follows:

$$\text{deltacan}_t = \frac{(\text{FRCAN}_{t-1} - \text{FRMIN}) * \text{RSVGR}}{\text{RR} - \text{CUMRES}_{t-1}} \quad (41)$$

where,

deltacan _t	=	finding rate decline parameter in year t (>0)
t	=	forecast year
FRCAN	=	finding rate (billion cubic feet per well)
FRMIN	=	minimum finding rate (0.25)
RSVGR	=	reserves growth factor (3.85)

- RR = initial recoverable resource estimate (including inferred resources) at beginning of projection period (89 tcf in 2002), adjusted each year for assumed impact of technological improvement of 0.5 percent per year
- CUMRES = cumulative reserve discoveries (RESADCAN) from beginning of projection period to the current projection year t

The denominator represents the remaining recoverable resource estimate in a given period. The minimum finding rate (FRMIN) is incorporated in the equation so that the cumulative reserve discoveries match the recoverable resource estimate when the yield from wells drilled falls to the minimum. The changing recoverable volume necessitates recomputing the decline parameter (deltacan) in each period.

Total reserve additions in period t is given by:

$$\text{RESADCAN}_t = \int_0^{\text{sucwell}_t} \text{FRCAN}_t \, d(\text{SUCWELL}) \quad (42)$$

-or-

$$\text{RESADCAN}_t = \frac{\text{FRCAN}_{t-1}}{\text{deltacan}_t} * e^{(-\text{deltacan} * \text{SUCWELL}_t)} \quad (43)$$

where,

- RESADCAN_t = Reserve additions in year t, in BCF
- FRCAN_{t-1} = Finding rate in the previous year, in BCF per well
- SUCWELL_t = Successful gas wells drilled in year t
- deltacan_t = finding rate decline parameter in year t

Total end-of-year proved reserves for each period equal proved reserves from the previous period plus new reserve additions less production.

$$\text{RESBOYCAN}_{t+1} = \text{CURRESCAN}_t + \text{RESADCAN}_t - \text{OGPRDCAN}_t \quad (44)$$

where,

- RESBOYCAN_{t+1} = Beginning of year reserves for t+1 (end of year reserves for t), in BCF
- CURRESCAN_t = Beginning of year reserves for t, in BCF
- RESADCAN_t = Reserve additions in year t, in BCF
- OGPRDCAN_t = Production in year t, in BCF
- t = forecast year

When rapid and slow technological progress cases are run, the forecasted values for the number of successful wells and for the finding rate decline are adjusted accordingly.

Gas Production

Production is commonly modeled using a production-to-reserves ratio. A major advantage to this approach is its transparency. Additionally, the performance of this function in the aggregate is consistent with its application on the micro level. The production-to-reserves ratio, as the relative measure of reserves drawdown, represents the rate of extraction, given any stock of reserves.

Conventional gas production in the WCSB in year t is processed in the NGTDM and is represented by the following equation:

$$Q_t = R_{t-1} * PR_t * (1 + \beta * \frac{\Delta P_t}{P_{t-1}}) \quad (45)$$

where,

Q_t	=	Gas production in year t, BCF
R_{t-1}	=	End-of-year gas reserves in previous year, BCF
PR_t	=	gas extraction rate in previous year (measured as the production to reserves ratio at the end of the previous year)
P_t	=	gas price at the wellhead in year t, 1987\$/Mcf
β	=	assumed short run price elasticity of extraction
ΔP_t	=	$(P_t - P_0)$, the difference in the price in year t from a reference price (P_0 , set in the NGTDM) associated with the reference quantity ($R_{t-1} * PR_t$), 1987\$/Mcf

The proposed production equation relies on price induced variation in the extraction rate to determine short run supplies. The producible stock of reserves equals reserves at the end of the previous period. The extraction rate for the current period, PR_t , is assumed as the approximate extraction rate for the current period under normal operating conditions. The product of R_{t-1} and PR_t is the expected, or normal, operating level of production for year t. The extraction rate (PR_{t+1}) for year t+1 is defined in the FNGSS as:

$$PRRATCAN_{t+1} = \frac{OGPRDCAN_t * (1 - PR_t) + PRRATNEW * RESADCAN_t}{RESBOYCAN_t} \quad (46)$$

where,

$PRRATCAN_{t+1}$	=	gas extraction rate in previous year (measured as the production to reserves ratio at the end of year t)
$PRRATCAN_t$	=	gas extraction rate in year t (measured as the production to reserves ratio at the end of the previous year: $PR_t = OGPRDCAN_t / RESBOYCAN_{t-1}$)
$RESBOYCAN_t$	=	end-of-year gas reserves in year t, BCF
$OGPRDCAN_t$	=	Canadian gas production in year t, BCF
$RESADCAN_t$	=	reserve additions in year t, BCF
$PRRATNEW$	=	new production to reserves ratio for new reserve additions

Allocation of Canadian Natural Gas Production to Canada and the United States

The purpose of Canadian natural gas production is to meet both Canadian demands and exports to the United States. The methodology used to define Canadian natural gas production and exports is intrinsic in the North American market equilibrium that occurs in the NGTDM. Thus, the details of this procedure are provided in the methodology documentation for that module.

Mexican Gas Trade

Mexican gas trade is a highly complex issue. A range of noneconomic factors will influence, if not determine, future flows of gas between the United States and Mexico. Uncertainty surrounding Mexican/U.S. trade is great enough that not only is the magnitude of flow for any future year in doubt, but also the direction of flow.

Despite the uncertainty and the significant influence of noneconomic factors that influence Mexican gas trade with the United States, a methodology to anticipate the path of future Mexican imports from, and exports to, the United States has been incorporated into the FNGSS. This outlook is generated using assumptions regarding regional supply from indigenous production and/or liquefied natural gas (LNG) and regional/sectoral demand growth for natural gas in Mexico. These assumptions have been developed from an assessment of current and expected industry and market circumstances as indicated in announcements and reports from Mexican government officials, industry announcements, and articles or reports in relevant publications. Excess supply is assumed to be available for export to the United States, and any shortfall is assumed to be met by imports from the United States.

Liquefied Natural Gas

Liquefaction is a process whereby natural gas is cooled to minus 260 degrees Fahrenheit, causing it to be converted from a gas to a liquid. This also reduces its volume significantly, making it possible to transport to distant markets. This allows stranded gas, or gas that would otherwise be inaccessible due either to lack of nearby markets or lack of pipeline infrastructure to deliver it to local markets, to be monetized. LNG imports into the United States have grown over the past five years, and prospects for continued growth are good. Various factors have contributed to the recent re-emergence of LNG as an economically viable source of energy, including contracts with pricing and delivery flexibility, the emergence of a spot market for LNG, a growing preference toward natural gas due to the lesser environmental consequences for burning it versus other fossil fuels, a desire for diversification and security of energy supply, and lower costs throughout the LNG supply chain. Relatively higher recent natural gas prices have provided further impetus. The prospect of the construction of new LNG terminals has increased with the recent Federal Energy Regulatory Commission (FERC) decision (the Hackberry Decision) to terminate open access requirements for new onshore LNG terminals in the United States, by placing them on an equal footing with offshore terminals regulated under provisions of the Maritime Security Act of 2002. In addition the Maritime Security Act amended the Deepwater Port Act of 1974 to include offshore natural gas facilities, thus transferring jurisdiction for offshore natural gas facilities from FERC to the Maritime Administration and the U.S. Coast Guard, lowering the regulatory hurdles faced by potential developers of offshore LNG receiving terminals. For *AEO2004*, a new algorithm was employed for determining U.S. imports of LNG and moved from the OGSM to be solved within the Natural Gas Transmission and Distribution Module (NGTDM). A detailed description of the algorithm is provided in the NGTDM documentation report. In brief, LNG imports into the United States are determined using a set of regional, annual supply curves for LNG within the market equilibrium routine in the NGTDM. The supply curves are established by determining the implied marginal prices within a linear programming (LP) structure which minimize the cost of importing a selected level and regional distribution of LNG imports in a year. The LP is solved multiple times to establish a series of points, or price/quantity pairs, along each of the regional supply curves. The supply curves are drawn by connecting the points. Within the LP, costs are represented using a series of step curves for regasification in each U.S. receiving region represented, as well as for production and liquefaction for each producing country/region represented. Shipping costs are similarly represented between each producing and receiving point, as is reasonable. Exports of LNG via Alaska to Japan are still established exogenously to OGSM and set constant throughout the forecast period at the average of recent historical levels (64.9 bcf).

Appendix A. Data Inventory

An inventory of OGSM variables is presented in the following tables. These variables are divided into four categories:

Variables:	Variables calculated in OGSM
Data:	Input data
Parameters:	Estimated parameters
Output:	OGSM outputs to other modules in NEMS.

The data inventory for the Offshore Supply Submodule is presented in a separate table.

All regions specified under classification are OGSM regions unless otherwise noted.

Variables						
Equation Number	Subroutine	Variable Name		Description	Unit	Classification
		Code	Text			
1	OG_DCF	CF	NCFON	Net cash flow for a representative project	1987\$	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
2, 5	OG_DCF	DCFTOT	PROJDCFON	Discounted cash flow for a representative project	1987\$	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
3, 4, 6	OG_DCF	OG_DCF	DCFON	Discounted cash flow for a representative well	1987\$	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
7, 8	OGEXP_CALC	SODCF	ODCFON	Discounted cash flow for oil	1987\$	Class(Exploratory,Developmental); 6 Lower 48 onshore regions
7, 9	OGEXP_CALC	SGDCF	SGDCFON	Discounted cash flow for shallow gas	1987\$	Class(Exploratory,Developmental); 6 Lower 48 onshore regions
10	OGEXP_CALC	CASHFLOW	CASHFLOW	Industry cash flow	1997\$	NA
11	OGEXP_CALC	WELL48	WELLSON	Lower 48 onshore wells drilled	Wells	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
12	OGEXP_CALC	SUCWELL48	SUCWELSON	Successful Lower 48 onshore wells drilled	Wells	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
13	OGEXP_CALC	DRYWELL48	DRYWELON	Dry Lower 48 onshore wells drilled	Wells	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
14	OGCST_L48	ESTWELL48	ESTWELLS	Estimated lower 48 onshore drilling (successful and dry)	Wells	Lower 48 onshore
15	OGCST_L48	ESTSUCWELL48	ESTSUCWELLS	Estimated lower 48 onshore successful wells drilled	Wells	Lower 48 onshore
16	OGCST_L48	RIG48	RIG48	Available rigs	Rigs	Lower 48 onshore
17	OGCST_L48	DRILL48	DRILLCOST	Successful well drilling costs	1987\$ per well	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)

Equation Number	Subroutine	Variables				
		Variable Name		Description	Unit	Classification
		Code	Text			
18	OGCST_L48	DRYL48	DRYCOST	Dry well drilling costs	1987\$ per well	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
19	OGCST_L48	LEASL48	LEQC	Lease equipment costs	1987\$ per well	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
20	OGCST_L48	OPERL48	OPC	Operating costs	1987\$ per well	Class(Exploratory,Developmental); 6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
21	OGOUT_L48	FR1L48	FR1	Finding rates for new field wildcat drilling	Oil-MMB per well Gas-BCF per well	6 Lower 48 onshore regions; Fuel(2 oil,2 gas)
22	OGOUT_L48	NRDL48	NRD	Proved reserves added by new field discoveries	Oil-MMB Gas-BCF	6 Lower 48 onshore regions; Fuel(2 oil,2 gas);
23	OGOUT_L48	FR2L48	FR2	Finding rates for other exploratory and developmental wells	Oil-MMB per well Gas-BCF per well	6 Lower 48 onshore regions; Fuel(2 oil,2 gas)
24	OGOUT_L48	REVL48	REVISIONS	Reserve revisions	Oil-MMB Gas-BCF	6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
25	OGOUT_L48	RESADL48	RA	Total additions to proved reserves	Oil-MMB Gas-BCF	6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
26	OGOUT_L48	RESBOYL48	R	End of year reserves for current year	Oil-MMB Gas-BCF	6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
27-28	OGOUT_L48	PRRATL48	PR	Production to reserves ratios	Fraction	6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
29	OGOUT_L48	EXPRDL48	Q	Production	Oil-MMB Gas-BCF	6 Lower 48 onshore regions; Fuel(2 oil, 5 gas)
30-31	OGCOMP_AD	OGPRDAD	ADGAS	Associated-dissolved gas production	BCF	6 Lower 48 onshore regions

Variables						
Equation Number	Subroutine	Variable Name		Description	Unit	Classification
		Code	Text			
32	OGCOST_AK	DRILLAK	DRILLCOST	Drilling costs	1987\$ per well	Class(Exploratory,Developmental); 3 Alaska regions,Fuel (oil, gas)
33	OGCOST_AK	LEASAK	EQUIP	Lease equipment costs	1987\$ per well	Class(Exploratory,Developmental); 3 Alaska regions,Fuel (oil, gas)
34	OGCOST_AK	OPERAk	OPCOST	Operating costs	1987\$ per well	Class(Exploratory,Developmental); 3 Alaska regions,Fuel (oil, gas)
35	OG_DCF	REV	REV	Revenue from a representative project	1987\$	Alaska field
36	OG_DCF	DCFTOT	DCF	Discounted cash flow for a representative project	1987\$	Alaska field
37	OGNEW_AK	COST_AK	COST	Capital costs	1987\$	Alaska field
38	OGNEW_AK	PROF_AK	PROF	Profitability indicator	NA	Alaska field
39	XOGOUT_IMP	SUCWELL	SUCWELL	Successful Canadian wells drilled in WCSB	Wells	Fuel(gas)
40	XOGOUT_IMP	FRCAN	FRCAN	Canadian finding rate for WCSB	Gas:BCF per well	Fuel(gas)
41						
42	XOGOUT_IMP	RESADCAN	RESADCAN	Canadian reserve additions in WCSB	Gas: BCF	Fuel(gas)
43						
44	XOGOUT_IMP	RESBOYCAN	RESBOYCAN	WCSB Canadian reserves (BOY for t+1)	Gas: BCF	Fuel(gas)
45	XOGOUT_IMP				Gas: BCF	Fuel(gas)
46	XOGOUT_IMP	PRRATCAN	PR	Canadian production to reserves ratio in WCSB	Fraction	Fuel(gas)
3A-1	OG_DCF	DCFTOT	DCF	Discounted cash flow for a representative project	1987\$ per project	NA

Equation Number	Subroutine	Variables				
		Variable Name		Description	Unit	Classification
		Code	Text			
3A-2	OG_DCF	PVSUM(1)	PVREV	Present value of expected revenue	1987\$ per project	NA
3A-4	OG_DCF	PVSUM(2)	PVROY	Present value of expected royalty payments	1987\$ per project	NA
3A-5	OG_DCF	PVSUM(3)	PVPRODTAX	Present value of expected production taxes	1987\$ per project	NA
3A-6	OG_DCF	PVSUM(4)	PVDRILLCOST	Present value of expected drilling costs	1987\$ per project	NA
3A-7	OG_DCF	PVSUM(5)	PVEQUIP	Present value of expected lease equipment costs	1987\$ per project	NA
3A-8	OG_DCF	PVSUM(8)	PVKAP	Present value of expected capital costs	1987\$ per project	NA
3A-9	OG_DCF	PVSUM(6)	PVOPCOST	Present value of expected operating costs	1987\$ per project	NA
3A-10	OG_DCF	PVSUM(7)	PVABANDON	Present value of expected abandonment costs	1987\$ per project	NA
3A-11	OG_DCF	PVSUM(13)	PVTAXBASE	Present value of expected tax base	1987\$ per project	NA
3A-12	OG_DCF	XIDC	XIDC	Expensed Costs	1987\$ per project	NA
3A-14	OG_DCF	DHC	DHC	Dry hole costs	1987\$ per project	NA
3A-15	OG_DCF	DEPREC	DEPREC	Depreciable costs	1987\$ per project	NA
3A-16	OG_DCF	PVSUM(15)	PVSIT	Expected value of state income taxes	1987\$ per project	NA
3A-17	OG_DCF	PVSUM(16)	PVFIT	Expected value of federal income taxes	1987\$ per project	NA

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
ACCESS_YR	--	OGINIT_BFW	Year in which Federal access restrictions would be reduced in the Rocky Mountain Region in an increased ACCESS Case	Year	NA	Office of Integrated Analysis and Forecasting
ADVLTXL48	PRODTAX	OGFOR_L48 OGINIT_L48	Lower 48 onshore ad valorem tax rates	Fraction	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Colorado School of Mines. Oil Property Evaluation, 1983, p. 9-7
ADVLTXOFF	PRODTAX	OGFOR_OFF OGINIT_OFF	Offshore ad valorem tax rates	Fraction	4 Lower 48 offshore subregions; Fuel (oil, gas)	Colorado School of Mines. Oil Property Evaluation, 1983, p. 9-7
ANGTSMAX	--	OGINIT_AK OGPIP_AK	ANGTS maximum flow	BCF/D	Alaska	National Petroleum Council
ANGTSPRC	--	OGINIT_AK OGPIP_AK	Minimum economic price for ANGTS start up	1987\$/MCF	Alaska	National Petroleum Council
ANGTSRES	--	OGINIT_AK OGPIP_AK	ANGTS reserves	BCF	Alaska	National Petroleum Council
ANGTSYR	--	OGINIT_AK OGPIP_AK	Earliest start year for ANGTS flow	Year	NA	National Petroleum Council
BUILDLAG	--	OGEXPAND_LNG OGINIT_LNG	Buildup period for expansion of LNG facilities	Year	NA	Office of Integrated Analysis and Forecasting
CPRDCAN	--	OGINIT_IMP	Canadian coproduct rate	Fraction	Canada; Fuel (oil, gas)	Not Used Derived using data from the Canadian Petroleum Association
CPRDL48	COPRD	OGFOR_L48 OGINIT_L48	Lower 48 onshore coproduct rate	Fraction	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
CPRDOFF	COPRD	OGFOR_OFF OGINIT_OFF	Offshore coproduct rate	Fraction	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
CURPRRCAN	PR	OGINIT_IMP OGINIT_RES OGOUT_IMP	Canadian 1989 P/R ratio	Fraction	Canada; Fuel (gas)	Derived using data from the Canadian Petroleum Association

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
CURPRRL48	omega	OGINIT_L48 OGINIT_RES OGOUT_L48	Lower 48 initial P/R ratios	Fraction	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
CURPROFF	omega	OGINIT_OFF OGINIT_RES OGOUT_OFF	Offshore initial P/R ratios	Fraction	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
CURPRRTDM	--	OGINIT_L48 OGOUT_L48	Lower 48 initial P/R ratios at NGTDM level	Fraction	17 OGSM/NGTDM regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
CURRESL48	R	OGINIT_L48 OGINIT_RES OGOUT_L48	Lower 48 onshore initial reserves	MMB BCF	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Derived from Annual Reserves Report Data
CURRESOFF	R	OGINIT_OFF OGINIT_RES OGOUT_OFF	Offshore initial reserves	MMB BCF	4 Lower 48 offshore subregions; Fuel (oil, gas)	Derived from Annual Reserves Report Data
CURRESTDM	--	OGINIT_L48 OGINIT_RES OGOUT_L48	Lower 48 natural gas reserves at NGTDM level	MMB BCF	17 OGSM/NGTDM regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
DECFCAC	DECFCAC	OGOUT_L48	Inferred resource simultaneous draw down decline rate adjustment factor	Fraction	NA	Office of Integrated Analysis and Forecasting
DECLCAN	--	OGINIT_IMP	Canadian decline rates	Fraction	Canada; Fuel (oil, gas)	Not Used Office of Integrated Analysis and Forecasting
DECLL48	--	OGFOR_L48 OGINIT_L48 WELL	Lower 48 onshore decline rates	Fraction	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
DECLOFF	--	OGFOR_OFF OGINIT_OFF WELL	Offshore decline rates	Fraction	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
DECLPRO	--	OGINIT_AK OGPRO_AK	Alaska decline rates for currently producing fields	Fraction	Field	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
DEPLETERT	--	OGINIT_IMP	Depletion rate	Fraction	NA	Not Used Office of Integrated Analysis and Forecasting
DEV_AK	--	OGDEV_AK OGINIT_AK OGSUP_AK	Alaska drilling schedule for developmental wells	Wells per year	3 Alaska regions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
DISC	disc	OGDCF_AK OGFOR_L48 OGFOR_OFF OGINIT_BFW	Discount rate	Fraction	National	Office of Integrated Analysis and Forecasting
DISRT	--	OGINIT_IMP	Discount rate	Fraction	Canada	Not Used Office of Integrated Analysis and Forecasting
DRILLAK	DRILL	OGCOST_AK OGINIT_AK	Alaska drilling cost (not including new field wildcats)	1990\$/well	Class (exploratory, developmental); 3 Alaska regions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
DRILLCAN	--	OGINIT_IMP	Canadian initial drilling costs	1987\$	Canada; Fuel (oil, gas)	Not Used Office of Integrated Analysis and Forecasting
DRILLOFF	DRILL	OGALL_OFF OGFOR_OFF OGINIT_OFF	Offshore drilling cost	1987\$	4 Lower 48 offshore subregions	Mineral Management Service
DRLNFWAK	--	OGCOST_AK OGINIT_AK	Alaska drilling cost of a new field wildcat	1990\$/well	3 Alaska regions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
DRYAK	DRY	OGDCF_AK OGDEV_AK OGINIT_AK OGNEW_AK	Alaska dry hole cost	1990\$/hole	Class (exploratory, developmental); 3 Alaska regions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
DRYCAN	--	OGINIT_IMP	Canadian dry hole cost	1987\$	Class (exploratory, developmental)	Not Used Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
DRYOFF	DRY	OGALL_OFF OGEXP_CALC OGFOR_OFF OGINIT_OFF	Offshore dry hole cost	1987\$	Class (exploratory, developmental); 4 Lower 48 offshore subregions	Minerals Management Service
DVWELLOFF	--	OGFOR_OFF OGINIT_OFF	Offshore development project drilling schedules	wells per year	4 Lower 48 offshore subregions; Fuel (oil, gas)	Minerals Management Service
DVWLCBML48	--	OGFOR_L48 OGINIT_L48	Lower 48 development project drilling schedules for coalbed methane	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
DVWLDGSL48	--	OGFOR_L48 OGINIT_L48	Lower 48 development project drilling schedules for deep gas	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
DVWLDVSL48	--	OGFOR_L48 OGINIT_L48	Lower 48 development project drilling schedules for devonian shale	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
DVWLGASCAN	--	OGINIT_IMP	Canadian development gas drilling schedule	wells per project per year	Canada	Not Used
DVWLOILCAN	--	OGINIT_IMP	Canadian development oil drilling schedule	wells per project per year	Canada	Not Used
DVWLOILL48	--	OGFOR_L48 OGINIT_L48	Lower 48 development project drilling schedules for oil	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
DVWLSGSL48	--	OGFOR_L48 OGINIT_L48	Lower 48 development project drilling schedules for shallow gas	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
DVWLTSGL48	--	OGFOR_L48 OGINIT_L48	Development project drilling schedules for tight gas	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
ELASTCAN	--	OGINIT_IMP XOGOUT_IMP	Elasticity for Canadian reserves	Fraction	Canada	Office of Integrated Analysis and Forecasting
ELASTL48	--	OGINIT_L48 OGINIT_RES OGOUT_L48	Lower 48 onshore production elasticity values	Fraction	6 OGSm Lower 48 onshore regions	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
ELASTOFF	--	OGINIT_OFF OGINIT_RES OGOUT_OFF	Offshore production elasticity values	Fraction	4 Lower 48 offshore subregions	Office of Integrated Analysis and Forecasting
EMCO	--	OGCOMP_EMIS OGINIT_EMIS	Emission factors for crude oil production	Fraction	Census regions	EPA - Energy Technology Characterizations Handbook
EMFACT	--	OGCOMP_EMIS OGINIT_EMIS	Emission factors	MMB MMCF	Census regions	EPA - Energy Technology Characterizations Handbook
EMNG	--	OGCOMP_EMIS OGINIT_EMIS	Emission factors for natural gas production	Fraction	Census regions	EPA - Energy Technology Characterizations Handbook
EQUIPAK	EQUIP	OGCOST_AK OGINIT_AK	Alaska lease equipment cost	1990\$/well	Class (exploratory, developmental); 3 Alaska regions; Fuel (oil, gas)	U.S. Geological Survey
EXOFFFRGNLAG	--	OGEXP_CALC OGINIT_BFW	Offshore exploration & development regional expenditure (1989)	1987\$	Class (exploratory, developmental); 4 Lower 48 offshore subregions	Office of Integrated Analysis and Forecasting
EXP_AK	--	OGDEV_AK OGINIT_AK OGSUP_AK	Alaska drilling schedule for other exploratory wells	wells per year	3 Alaska regions	Office of Integrated Analysis and Forecasting
EXPENSE	--	OGINIT_IMP	Fraction of drill costs that are expensed	fraction	Class (exploratory, developmental)	Not Used Canadian Tax Code
EXWELLOFF	--	OGFOR_OFF OGINIT_OFF	Offshore exploratory project drilling schedules	wells per year	4 Lower 48 offshore subregions	Minerals Management Service
EXWLCBML48	--	OGFOR_L48 OGINIT_L48	Lower 48 exploratory project drilling schedules for coalbed methane	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
EXWLDGSL48	--	OGFOR_L48 OGINIT_L48	Lower 48 exploratory and developmental project drilling schedules for deep gas	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
EXWLDVSL48	--	OGFOR_L48 OGINIT_L48	Lower 48 exploratory project drilling schedules for devonian shale	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
EXWLGASCAN	--	OGINIT_IMP	Canadian exploratory gas drilling schedule	wells per year	Canada	Not Used
EXWLOILCAN	--	OGINIT_IMP	Canadian exploratory oil drilling schedule	wells per year	Canada	Not Used
EXWLOILL48	--	OGFOR_L48 OGINIT_L48	Lower 48 exploratory project drilling schedules for oil	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
EXWLSGSL48	--	OGFOR_L48 OGINIT_L48	Lower 48 exploratory project drilling schedules for shallow gas	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
EXWLTSGL48	--	OGFOR_L48 OGINIT_L48	Lower 48 exploratory project drilling schedules for tight gas	wells per year	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
FACILAK	--	OGDEV_AK OGFAC_AK OGINIT_AK OGSUP_AK	Alaska facility cost (oil field)	1990\$/bls	Field size class	U.S. Geological Survey
FEDTXCAN	--	OGINIT_IMP	Canadian corporate tax rate	fraction	Canada	Not used. Petroleum Fiscal Systems in Canada - Energy, Mines & Resources
FEDTXR	FDRT	OGDCF_AK OGEXP_CALC OGFOR_L48 OGFOR_OFF OGINIT_BFW	U.S. federal tax rate	fraction	Canada	U.S. Tax Code
FLOWCAN	--	OGINIT_IMP	Canadian flow rates	bls, MCF per year	Canada; Fuel (oil, gas)	Not used. Office of Integrated Analysis and Forecasting
FLOWL48	--	OGFOR_L48 OGINIT_L48	Lower 48 onshore flow rates	bls, MCF per year	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	EIA, Office of Oil and Gas
FLOWOFF	--	OGFOR_OFF OGINIT_OFF	Offshore flow rates	bls, MCF per year	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
FPRDCST	--	OGINIT_LNG OGPROF_LNG	Foreign production costs	1991\$/MCF per year	LNG Source Country	National Petroleum Council
FRMINCAN	FRMIN	OGINIT_IMP XOGOUT_IMP	Canadian minimum economic finding rate	BCF per well	Canada	Office of Integrated Analysis and Forecasting
FRMINL48	FRMIN	OGINIT_L48 OGOUT_L48	Lower 48 onshore minimum exploratory well finding rate	MMB BCF per well	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
FRMINOFF	FRMIN	OGINIT_OFF OGOUT_OFF	Offshore minimum exploratory well finding rate	MMB BCF per well	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
FRTECHCAN	FRTECH	XOGOUT_IMP	Canada technology factor applied to finding rate	fraction	Canada	Office of Integrated Analysis and Forecasting
FR1L48	FR1	OGINIT_L48 OGOUT_L48	Lower 48 onshore new field wildcat well finding rate	MMB BCF per well	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)	Office of Integrated Analysis and Forecasting
FR1OFF	FR1	OGINIT_OFF OGOUT_OFF	Offshore new field wildcat well finding rate	MMB BCF per well	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
FR2L48	FR3	OGINIT_L48 OGOUT_L48	Lower 48 onshore developmental well finding rate	MMB BCF per well	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)	Office of Integrated Analysis and Forecasting
FR2OFF	FR3	OGINIT_OFF OGOUT_OFF	Offshore developmental well finding rate	MMB BCF per well	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
FR3L48	FR2	OGINIT_L48 OGOUT_L48	Lower 48 other exploratory well finding rate	MMB BCF per well	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)	Office of Integrated Analysis and Forecasting
FR3OFF	FR2	OGINIT_OFF OGOUT_OFF	Offshore other exploratory well finding rate	MMB BCF per well	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
FSZCOAK	—	OGFOR_AK OGINIT_AK OGNEW_AK	Alaska oil field size distributions	MMB	3 Alaska regions	U.S. Geological Survey
FSZNGAK	--	OGFOR_AK OGINIT_AK OGNEW_AK	Alaska gas field size distributions	BCF	3 Alaska regions	U.S. Geological Survey
HISTADL48	--	OGINIT_L48	Lower 48 historical associated-dissolved natural gas reserves	BCF	NA	Annual Reserves report
HISTADOFF	--	OGINIT_OFF	Offshore historical associated-dissolved natural gas reserves	BCF	NA	Annual Reserves Report
HISTFRCAN	--	OGINIT_IMP XOGOUT_IMP	Historical Canadian finding rate for gas	BCF per well	Canada	Office of Integrated Analysis and Forecasting
HISTPRDCO	--	OGINIT_AK OGPRO_AK	Alaska historical crude oil production	MB/D	Field	Alaska Oil and Gas Conservation Commission
HISTPRRCAN	--	OGINIT_IMP XOGOUT_IMP	Canadian gas production to reserves ratio for historical years	BCF	Canada; Fuel (gas)	Office of Integrated Analysis and Forecasting
HISTPRRL48	--	OGINIT_L48	Lower 48 historical P/R ratios	fraction	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Derived from Annual Reserves Report
HISTPRROFF	--	OGINIT_OFF	Offshore historical P/R ratios	fraction	4 Lower 48 offshore subregions; Fuel (oil, gas)	Derived from Annual Reserves Report
HISTPRRTDM	--	OGINIT_L48	Lower 48 onshore historical P/R ratios at the NGTDM level	fraction	17 OGSM/NGTDM regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
HISTRESAD	--	OGINIT_IMP XOGOUT_IMP	Canadian gas reserves additions for historical years	BCF	Canada; Fuel (gas)	Office of Integrated Analysis and Forecasting
HISTRESCAN	--	OGINIT_IMP XOGOUT_IMP	Canadian beginning of year gas reserves for historical years	BCF	Canada; Fuel (gas)	Canadian Petroleum Association
HISTWELCAN	--	OGINIT_IMP XOGOUT_IMP	Canadian gas wells drilled in historical years	BCF	Canada; Fuel (gas)	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
HISTRESL48	--	OGINIT_L48	Lower 48 onshore historical beginning-of-year reserves	MMB BCF	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Annual Reserves Report
HISTRESOFF	--	OGINIT_OFF	Offshore historical beginning-of-year reserves	MMB BCF	4 Lower 48 offshore subregions; Fuel (oil, gas)	Annual Reserves Report
HISTRESTDM	--	OGINIT_L48	Lower 48 onshore historical beginning-of-year reserves at the NGTDM level	MMB BCF	17 OGSM/NGTDM regions; Fuel (2 oil, 5 gas)	Annual Reserves Report
IMPBYR	--	WELL OGEXPAND_LNG OGINIT_IMP XOGOUT_IMP	Base start-year for Foreign Natural Gas Supply Submodule	--	--	Office of Integrated Analysis and Forecasting
INFL	infl	OGDCF_AK OGFOR_L48 OGFOR_OFF OGINIT_BFW	U.S. inflation rate	fraction	National	Office of Integrated Analysis and Forecasting
INFRSVL48	I	OGINIT_L48 OGOUT_L48	Lower 48 onshore inferred reserves	MMB BCF	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
INFRSVOFF	I	OGINIT_OFF OGOUT_OFF	Offshore inferred reserves	MMB BCF	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
INFRT	--	OGINIT_IMP	Canadian inflation rate	fraction	Canada	Not used. Office of Integrated Analysis and Forecasting
INVESTRT	--	OGINIT_IMP	Canadian investment tax credit	fraction	Canada	Not Used
KAPFRCAK	EXKAP	OGDCF_AK OGINIT_AK	Alaska drill costs that are tangible & must be depreciated	fraction	Alaska	U.S. Tax Code
KAPFRCL48	EXKAP	OGFOR_L48 OGINIT_L48	Lower 48 onshore drill costs that are tangible & must be depreciated	fraction	Class (exploratory, developmental)	U.S. Tax Code

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
KAPFRCOFF	EXKAP	OGFOR_OFF OGINIT_OFF	Offshore drill costs that are tangible & must be depreciated	fraction	Class (exploratory, developmental)	U.S. Tax Code
KAPSPNDL48	KAP	OGFOR_L48 OGINIT_L48	Lower 48 onshore other capital expenditures	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Not used
KAPSPNDOFF	KAP	OGFOR_OFF OGINIT_OFF	Offshore other capital expenditures	1987\$	Class (exploratory, developmental); 4 Lower 48 offshore subregions	Minerals Mangement Service
LAGDRILL48	--	OGFOR_L48 OGINIT_L48	1989 Lower 48 drill cost	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
LAGDRYL48	--	OGFOR_L48 OGINIT_L48	1989 Lower 48 dry hole cost	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
LAGLEASL48	--	OGFOR_L48 OGINIT_L48	1989 Lower 48 lease equipment cost	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
LAGOPERL48	--	OGFOR_L48 OGINIT_L48	1989 Lower 48 operating cost	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
LEASCAN	--	OGINIT_IMP	Canadian lease equipment cost	1987\$	Canada; Fuel (oil, gas)	Not used. Office of Integrated Analysis and Forecasting
LEASOFF	EQUIP	OGFOR_OFF OGINIT_OFF	Offshore lease equipment cost	1987\$ per project	Class (exploratory, developmental); 4 Lower 48 offshore subregions	Minerals Mangement Service

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
LIQCAP	--	OGEXPAND_LNG OGINIT_LNG	Liquefaction capacity	BCF	LNG Source Country	National Petroleum Council
LIQCST	--	OGINIT_LNG OGPROF_LNG	Liquefaction costs	1991\$/MCF	LNG Source Country	National Petroleum Council
LIQSTAGE	--	OGEXPAND_LNG OGPROF_LNG	Liquefaction stage	NA	NA	National Petroleum Council
LST_CONV	--	OGINIT_BFW	Share of the conventional resources in the Rocky Mountains that are subject to Federal lease stipulations	Percent	Fuel (oil, gas)	ARI
MAXPRO	--	OGFOR_AK OGINIT_AK OGPRO_AK	Alaska maximum crude oil production	MB/D	Field	Announced Plans
MEXEXP	--	OGINIT_IMP OGOUT_MEX	Exports from Mexico	BCF	3 US/Mexican border crossing	Office of Integrated Analysis and Forecasting
MEXIMP	--	OGINIT_IMP OGOUT_MEX	Imports from Mexico	BCF	3 US/Mexican border crossing	Office of Integrated Analysis and Forecasting
NAC_CONV	--	OGINIT_BFW	Share of the conventional resources in the Rocky Mountains that are legally inaccessible	Percent	Fuel (oil, gas)	ARI
NFW_AK	--	OGINIT_AK OGNEW_AK	Alaska drilling schedule for new field wildcats	wells	NA	Office of Integrated Analysis and Forecasting
NFWCOSTOFF	COSTEXP	OGFOR_OFF OGINIT_OFF	Offshore new field wildcat cost	1987\$	Class (exploratory, developmental); 4 Lower 48 offshore subregions	Minerals Management Service
NFWELLOFF	--	OGFOR_OFF OGINIT_OFF	Offshore exploratory and developmental project drilling schedules	wells per project per year	Class (exploratory, developmental); r=1	Minerals Management Service
NGTDMMAP	--	OGINIT_L48 OGINIT_RES OGOUT_L48	Mapping of NGTDM regions to OGSM regions	NA	17 OGSM/NGTDM regions	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
OGCNBLOSS	--	OGINIT_IMP	Gas lost in transit to border	BCF	6 US/Canadian border crossings	Not Used
OGCNCAPB	--	OGINIT_IMP	Canadian capacities at borders - base case	BCF	6 US/Canadian border crossing	Not used. Derived from Natural Gas Annual
OGCNCAPH	--	OGINIT_IMP	Canadian capacities at borders - high WOP case	BCF	6 US/Canadian border crossing	Not used. Derived from Natural Gas Annual
OGCNCAPL	--	OGINIT_IMP	Canadian capacities at borders - low WOP case	BCF	6 US/Canadian border crossing	Not used. Derived from Natural Gas Annual
OGCNCON	--	OGINIT_IMP XOGOUT_IMP	Canadian gas consumption	BCF	Canada; Fuel (gas)	Office of Integrated Analysis and Forecasting
OGCNDEM	--	OGINIT_IMP	Canadian demand calculation parameters	NA	NA	Not Used
OGCNDMLOSS	--	OGINIT_IMP	Gas lost from wellhead to Canadian demand	BCF	Canada	Not used. Office of Integrated Analysis and Forecasting
OGCNEXLOSS	--	OGINIT_IMP	Gas lost from US export to Canadian demand	BCF	Canada	Not used. Office of Integrated Analysis and Forecasting
OGCNFLW	--	OGINIT_IMP	1989 flow volumes by border crossing	BCF	6 US/Canadian border crossings	Not used. Office of Integrated Analysis and Forecasting
OGCNPARAM1	--	OGINIT_IMP	Actual gas allocation factor	fraction	Canada	Not used. Office of Integrated Analysis and Forecasting
OGCNPARAM2	--	OGINIT_IMP	Responsiveness of flow to different border prices	fraction	Canada	Not used. Office of Integrated Analysis and Forecasting
OGCNPPRD	--	OGINIT_PRICE	Canadian price of oil and gas	oil: 87\$/B gas: 87\$/mcf	Canada	NGTDM

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
OGPNGIMP	--	OGPIP_AK OGPROF_LNG	Natural gas import price	87\$/mcf	US/Canadian & US/Mexican border crossings and LNG destination points	NGTDM
OPERCAN	--	OGINIT_IMP	Canadian operating cost	\$ 1987	Canada; Fuel (gas)	Not used. Office of Integrated Analysis and Forecasting
OPEROFF	OPCOST	OGFOR_OFF OGINIT_OFF	Offshore operating cost	1987\$ per well per year	Class (exploratory, developmental); 4 Lower 48 offshore subregions	Mineral Management Service
PRJAK	n	OGDCF_AK OGINIT_AK	Alaska oil project life	Years	Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
PRJL48	n	OGFOR_L48 OGINIT_L48	Lower 48 project life	Years	Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
PRJOFF	n	OGFOR_OFF OGINIT_OFF	Offshore project life	Years	Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
PROVTCAN	PROVRT	OGINIT_IMP	Canadian provincial corporate tax rates	fraction	Canada	Not used. Petroleum Fiscal Systems in Canada - Energy, Mines & Resources
PROYR	--	OGFOR_AK OGINIT_AK OGPRO_AK	Start year for known fields in Alaska	Year	Field	Announced Plans
QLNG	--	OGEXPAND_LNG OGINIT_LNG OGLNG_OUT	LNG operating flow capacity	BCF	LNG destination points	National Petroleum Council
QLNGMAX	--	OGEXPAND_LNG OGINIT_LNG OGLNG_OUT	LNG maximum capacity	BCF	LNG destination Points	National Petroleum Council
RCPRDAK	m	OGDCF_AK OGINIT_AK	Alaska recovery period of intangible & tangible drill cost	Years	Alaska	U.S. Tax Code

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
RCPRDCAN	--	OGINIT_IMP	Canada recovery period of intangible & tangible drill cost	Years	Canada	Not used. Petroleum Fiscal Systems in Canada - Energy, Mines & Resources
RCPRDL48	m	OGFOR_L48 OGINIT_L48	Lower 48 recovery period for intangible & tangible drill cost	Years	Lower 48 Onshore	U.S. Tax Code
RCPRDOFF	m	OGFOR_OFF OGINIT_OFF	Offshore recovery period intangible & tangible drill cost	Years	Lower 48 Offshore	U.S. Tax Code
RECRES	--	OGFOR_AK OGINIT_AK OGPRO_AK	Alaska crude oil resources for known fields	MMB	Field	OFE, <i>Alaska Oil and Gas - Energy Wealth or Vanishing Opportunity</i>
REGASCST	--	OGINIT_LNG OGPROF_LNG	Regasification costs	1991\$/MCF per year	Operational Stage; LNG destination points	National Petroleum Council
REGASEXPAN	--	OGEXPAND_LNG OGINIT_LNG	Regasification capacity	BCF	LNG destination points	National Petroleum Council
REGASSTAGE	--	OGEXPAND_LNG OGINIT_LNG OGPROF_LNG	Regasification stage	NA	NA	National Petroleum Council
RESBASE	Q	OGINIT_IMP XOGOUT_IMP	Canadian recoverable resource estimate	BCF	Canada	Canadian Geological Survey
ROYRATE	--	OGINIT_IMP	Canadian royalty rate	fraction	Canada	Not used. Petroleum Fiscal Systems in Canada - Energy, Mines & Resources
ROYRT	ROYRT	OGDCF_AK OGFOR_L48 OGINIT_BFW	Alaska royalty rate	fraction	Alaska	U.S. Geological Survey
SEVTXAK	PRODTAX	OGINIT_AK OGSEVR_AK	Alaska severance tax rates	fraction	Alaska	U.S. Geological Survey
SEVTXL48	PRODTAX	OGFOR_L48 OGINIT_L48	Lower 48 onshore severance tax rates	fraction	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Commerce Clearing House

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
SEVTXOFF	PRODTAX	OGFOR_OFF OGINIT_OFF	Offshore severance tax rates	fraction	4 Lower 48 offshore subregions; Fuel (oil, gas)	Commerce Clearing House
SPENDIRKLAG	--		1989 Lower 48 exploration & development expenditures	1987\$	Class (exploratory, developmental)	Office of Integrated Analysis and Forecasting
SRAK	SR	OGDCF_AK OGDEV_AK OGINIT_AK OGNEW_AK	Alaska drilling success rates	fraction	Alaska	Office of Oil and Gas
SRCAN	SR	OGINIT_IMP	Canada drilling success rates	fraction	Canada	Office of Integrated Analysis and Forecasting
SRL48	SR	OGEXP_CALC OGEXP_FIX OGFOR_L48 OGINIT_L48 OGOUT_L48	Lower 48 drilling success rates	fraction	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
SROFF	SR	OGALL_OFF OGFOR_OFF OGINIT_OFF OGOUT_OFF	Offshore drilling success rates	fraction	Class (exploratory, developmental); 4 Lower 48 offshore subregions; Fuel (oil, gas)	Minerals Management Service
STARTLAG	--	OGEXPAND_LNG OGINIT_LNG	Number of year between stages (regasification and liquefaction)	years	NA	Office of Integrated Analysis and Forecasting
STL_CONV	--	OGINIT_BFW	Share of the conventional resources in the Rocky Mountains that are subject to Standard Lease Terms	Percent	Fuel (oil, gas)	ARI
STTXAK	STRT	OGDCF_AK OGINIT_AK	Alaska state tax rate	fraction	Alaska	U.S. Geological Survey
STTXL48	STRT	OGEXP_CALC OGFOR_L48 OGINIT_L48	State tax rates	fraction	6 Lower 48 onshore regions	Commerce Clearing House

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
STTXOFF	STRT	OGEXP_CALC OGFOR_OFF OGINIT_L48	State tax rates	fraction	4 Lower 48 offshore subregions	Commerce Clearing House
TECHAK	TECH	OGCOST_AK OGINIT_AK	Alaska technology factors	fraction	Alaska	Office of Integrated Analysis and Forecasting
TECHCAN	--	OGINIT_IMP	Canada technology factors applied to costs	fraction	Canada	Not used. Office of Integrated Analysis and Forecasting
TECHL48	TECH	OGFOR_L48 OGINIT_L48	Lower 48 onshore technology factors applied to costs	fraction	Lower 48 Onshore	Office of Integrated Analysis and Forecasting
TECHOFF	TECH	OGFOR_OFF OGINIT_OFF	Offshore technology factors applied to costs	fraction	Lower 48 Offshore	Office of Integrated Analysis and Forecasting
TRANCST	--	OGINIT_LNG OGPROF_LNG	LNG transportation costs	1990/MCF	NA	National Petroleum Council
TRANSAK	TRANS	OGDCF_AK OGINIT_AK	Alaska transportation cost	1990\$	3 Alaska regions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
TRANSL48	TRANS	OGFOR_L48 OGINIT_L48	Lower 48 onshore expected transportation costs	NA	6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Not Used
TRANSOFF	TRANS	OGFOR_OFF OGINIT_OFF	Offshore expected transportation costs	NA	4 Lower 48 offshore subregions; Fuel (oil, gas)	Not Used
UNRESOFF	Q	OGINIT_OFF OGOUT_OFF	Offshore undiscovered resources	MMB BCF	4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
URRCRDL48	Q	OGINIT_L48 OGOUT_L48	Lower 48 onshore undiscovered recoverable crude oil resources	MMB	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting
URRTDM	--	OGINIT_L48 OGOUT_L48	Lower 48 onshore undiscovered recoverable natural gas resources	TCF	6 Lower 48 onshore regions	Office of Integrated Analysis and Forecasting

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
WDCFIRKLAG	--	OGEXP_CALC OGINIT_BFW	1989 Lower 48 exploration & development weighted DCFs	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Integrated Analysis and Forecasting
WDCFIRLAG	--	OGEXP_CALC OGINIT_BFW	1989 Lower 48 regional exploration & development weighted DCFs	1987\$	Class (exploratory, developmental); 6 Lower 48 onshore regions;	Office of Integrated Analysis and Forecasting
WDCFL48LAG	--	OGEXP_CALC OGINIT_BFW	1989 Lower 48 onshore exploration & development weighted DCFs	1987\$	Class (exploratory, developmental)	Office of Integrated Analysis and Forecasting
WDCFOFFIRKLAG	--	OGEXP_CALC OGINIT_BFW	1989 offshore exploration & development weighted DCFs	1987\$	Class (exploratory, developmental); 4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Integrated Analysis and Forecasting
WDCFOFFIRLAG	--	OGEXP_CALC OGINIT_BFW	1989 offshore regional exploration & development weighted DCFs	1987\$	Class (exploratory, developmental); 4 Lower 48 offshore subregions;	Office of Integrated Analysis and Forecasting
WDCFOFFLAG	--	OGEXP_CALC OGINIT_BFW	1989 offshore exploration & development weighted DCFs	1987\$	Class (exploratory, developmental)	Office of Integrated Analysis and Forecasting
WELLAGCAN	WELLAG	OGINIT_IMP XOGOUT_IMP	1989 wells drilled in Canada	Wells per year	Fuel (gas)	Canadian Petroleum Association
WELLAGL48	WELLSON	OGEXP_CALC OGEXP_FIX OGINIT_L48	1989 Lower 48 wells drilled	Wells per year	Class (exploratory, developmental); 6 Lower 48 onshore regions; Fuel (2 oil, 5 gas)	Office of Oil & Gas
WELLAGOFF	WELLSOFF	OGALL_OFF OGEXP_CALC OGINIT_OFF	1989 offshore wells drilled	Wells per year	Class (exploratory, developmental); 4 Lower 48 offshore subregions; Fuel (oil, gas)	Office of Oil & Gas

Data						
Variable Name		Subroutine	Description	Unit	Classification	Source
Code	Text					
WELLIFE	--	OGINIT_IMP	Canadian project life	Years	Canada	Not used. Office of Integrated Analysis and Forecasting
XDCKAPAK	XDCKAP	OGDCF_AK OGINIT_AK	Alaska intangible drill costs that must be depreciated	fraction	Alaska	U.S. Tax Code
XDCKAPL48	XDCKAP	OGFOR_L48 OGINIT_L48	Lower 48 intangible drill costs that must be depreciated	fraction	NA	U.S. Tax Code
XDCKAPOFF	XDCKAP	OGFOR_OFF OGINIT_OFF	Offshore intangible drill costs that must be depreciated	fraction	NA	U.S. Tax Code

Parameters					
Equation Number	Subroutine	Parameter Name		Associated Variable	Classification
		Code	Text		
D-1, D-2	OGCST_L48	value from regression	b0	Constant coefficient	Lower 48 onshore
D-1, D-2	OGCST_L48	value from regression	b1	Crude oil wellhead price coefficient	Lower 48 onshore
D-1, D-2	OGCST_L48	value from regression	b2	Natural gas wellhead price coefficient	Lower 48 onshore
D-1, D-2	OGCST_L48	value from regression	ρ	Aurocorrelation parameter	Lower 48 onshore
D-3	OGCST_I48	ALPHA_RIG	$\ln(b0)$	Constant coefficient	Lower 48 onshore
D-3	OGCST_I48	B0_RIG	b1	Lower 48 onshore rigs	Lower 48 onshore
D-3	OGCST_I48	B1_RIG	b2	Revenue per lower 48 onshore rig	Lower 48 onshore
D-4	OGCST_I48	alpha_drl alpha_dry	$\ln(\delta0)$	Constant coefficient for onshore drilling and dry costs	6 lower 48 onshore regions, 3 fuels (oil, shallow gas, deep gas)
D-4	OGCST_I48	b0_drl b0_dry	$\ln(\delta1)$	Average depth per well	depth category, 3 fuels (oil, shallow gas, deep gas)
D-4	OGCST_I48	b4_drl b4_dry	$\ln(\delta2)$	Region 1 and region 6 adjustment	3 fuels (oil, shallow gas, deep gas)
D-4	OGCST_I48	b1_drl b1_dry	$\delta3$	Estimated number of Lower 48 wells drilled	3 fuels (oil, shallow gas, deep gas)
D-4	OGCST_I48	b3_drl b3_dry	$\delta4$	Lower 48 onshore rigs	3 fuels (oil, shallow gas, deep gas)
D-4	OGCST_I48	b2_drl b2_dry	$\delta5$	Time trend - proxy for technology	3 fuels (oil, shallow gas, deep gas)
D-4	OGCST_I48	rho_drl rho_dry	ρ	Autocorrelation parameter	3 fuels (oil, shallow gas, deep gas)
D-5	OGCST_L48	ALPHA_LEQ	$\ln(\epsilon0)$	Constant coefficient	6 Lower 48 onshore regions; Fuel oil, shallow gas, deep gas)
D-5	OGCST_L48	B0_LEQ	$\ln(\epsilon1)$	Lower 48 successful wells by fuel (oil, gas)	Fuel (oil, shallow gas, deep gas)
D-5	OGCST_L48	B1_LEQ	$\ln(\epsilon2)$	Time trend - proxy for technology	Fuel (oil, shallow gas, deep gas)

Parameters					
Equation Number	Subroutine	Parameter Name		Associated Variable	Classification
		Code	Text		
D-5	OGCST_L48	B2_LEQ	$\ln(\epsilon_3)$	Estimated successful wells	Fuel (oil, shallow gas, deep gas)
D-5	OGCST_L48	RHO_LEQ	ρ	Autocorrelation parameter	Fuel (oil, shallow gas, deep gas)
D-6	OGCST_L48	ALPHA_OPR	$\ln(\epsilon_0)$	Constant coefficient	6 Lower 48 onshore regions; Fuel (oil, shallow gas, deep gas)
D-6	OGCST_L48	B0_OPR	$\ln(\epsilon_1)$	Depth per well	Fuel (oil, shallow gas, deep gas)
D-6	OGCST_L48	B1_OPR	$\ln(\epsilon_2)$	Lower 48 successful wells by fuel (oil, gas)	Fuel (oil, shallow gas, deep gas)
D-6	OGCST_L48	B2_OPR	$\ln(\epsilon_3)$	Time trend - proxy for technology	Fuel (oil, shallow gas, deep gas)
D-6	OGCST_L48	RHO_OPR	ρ	Autocorrelation parameter	Fuel (oil, shallow gas, deep gas)
D-7	OGWELLS_L48	value from regression	alpha	Constant coefficient	NA
D-7	OGWELLS_L48	value from regression	beta1	Ratio of oil price and operating cost index	NA
D-7	OGWELLS_L48	value from regression	beta2	Ratio of gas price and operating cost index	NA
D-8	OGWELLS_L48	value from regression	m0	Constant coefficient	NA
D-8	OGWELLS_L48	value from regression	m1	Discounted cash flow for an exploratory oil well	NA
D-8	OGWELLS_L48	value from regression	m2	Industry Cashflow	NA
D-8	OGWELLS_L48	value from regression	ρ	Autocorrelation parameter	NA
D-9	OGWELLS_L48	value from regression	m0	Constant coefficient	NA
D-9	OGWELLS_L48	value from regression	m05	Constant coefficient for Region 5	NA
D-9	OGWELLS_L48	value from regression	m06	Constant coefficient for Region 6	NA
D-9	OGWELLS_L48	value from regression	m1	Discounted cash flow for a development oil well	NA
D-9	OGWELLS_L48	value from regression	m2	Industry Cashflow	NA
D-9	OGWELLS_L48	value from regression	ρ	Autocorrelation parameter	NA
D-10	OGWELLS_L48	value from regression	m0	Regional Constant coefficient	6 Lower 48 onshore regions

Parameters					
Equation Number	Subroutine	Parameter Name		Associated Variable	Classification
		Code	Text		
D-10	OGWELLS_L48	value from regression	m1	Discounted cash flow for an exploratory shallow gas well	NA
D-10	OGWELLS_L48	value from regression	m2	Industry Cashflow	NA
D-10	OGWELLS_L48	value from regression	ρ	Autocorrelation parameter	NA
D-11	OGWELLS_L48	value from regression	m0	Constant coefficient	NA
D-11	OGWELLS_L48	value from regression	m00	Regional Constant coefficient	6 Lower 48 onshore regions
D-11	OGWELLS_L48	value from regression	m1	Discounted cash flow for a development shallow gas well	NA
D-11	OGWELLS_L48	value from regression	m2	Industry Cashflow	NA
D-11	OGWELLS_L48	value from regression	ρ	Autocorrelation parameter	NA
D-12	OGWELLS_L48	value from regression	m0	Constant coefficient	NA
D-12	OGWELLS_L48	value from regression	m1	Discounted cash flow for an exploratory deep gas well	NA
D-12	OGWELLS_L48	value from regression	m2	Industry Cashflow	NA
D-13	OGWELLS_L48	value from regression	m0	Constant coefficient	NA
D-13	OGWELLS_L48	value from regression	m1	Discounted cash flow for a development deep gas well	NA
D-13	OGWELLS_L48	value from regression	m2	Industry Cashflow	NA
D-13	OGWELLS_L48	value from regression	ρ	Autocorrelation parameter	NA
D-14	OGFIND_L48	AIPHA_FR1	m0	Constant coefficient	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-14	OGFIND_L48	BETA3_FR1	m1	Remaining undiscovered resources	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-14	OGFIND_L48	BETA2_FR1	m2	New field wildcats	Fuel (2 oil, 2 gas)
D-14	OGFIND_L48	BETA1_FR1	m3	Wellhead price	Fuel (2 oil, 2 gas)
D-14	OGFIND_L48	RHO FR1	ρ	Autocorrelation parameter	Fuel (2 oil, 2 gas)

Parameters					
Equation Number	Subroutine	Parameter Name		Associated Variable	Classification
		Code	Text		
D-15	OGFIND_L48	AIPHA_FR1	m0	Constant coefficient	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-15	OGFIND_L48	BETA3_FR1	m1	Remaining undiscovered resources	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-15	OGFIND_L48	BETA2_FR1	m2	New field wildcats	Fuel (2 oil, 2 gas)
D-15	OGFIND_L48	RHO_FR1	ρ	Autocorrelation parameter	Fuel (2 oil, 2 gas)
D-16	OGFIND_L48	AIPHA_FR2	m0	Constant coefficient	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-16	OGFIND_L48	BETA3_FR2	m1	Remaining inferred reserves	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-16	OGFIND_L48	BETA1_FR2	m2	Other exploratory and development wells	Fuel (2 oil, 2 gas)
D-16	OGFIND_L48	BETA4_FR2	m3	Year - proxy for technology	Fuel (2 oil, 2 gas)
D-16	OGFIND_L48	RHO_FR2	ρ	Autocorrelation parameter	Fuel (2 oil, 2 gas)
D-17	OGFIND_L48	AIPHA_FR2	m0	Constant coefficient	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-17	OGFIND_L48	BETA3_FR2	m1	Remaining inferred reserves	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-17	OGFIND_L48	BETA1_FR2	m2	Other exploratory and development wells	Fuel (2 oil, 2 gas)
D-17	OGFIND_L48	BETA2_FR2	m3	Wellhead price	Fuel (2 oil, 2 gas)
D-17	OGFIND_L48	RHO_FR2	ρ	Autocorrelation parameter	Fuel (2 oil, 2 gas)
D-18	OGFIND_L48	AIPHA_FR3	B0	Regional Constant coefficient	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-18	OGFIND_L48	BETA3_FR3	B1	Remaining inferred reserves	6 Lower 48 onshore regions; Fuel (2 oil, 2 gas)
D-18	OGFIND_L48	BETA1_FR3	B2	Wellhead price	Fuel (2 oil, 2 gas)
D-18	OGFIND_L48	BETA4_FR3	B3	Wellhead price squared	Fuel (2 oil, 2 gas)

Parameters					
Equation Number	Subroutine	Parameter Name		Associated Variable	Classification
		Code	Text		
D-18	OGFIND_L48	RHO_FR3	B4	Ratio of wellhead price in year t and t-1	Fuel (2 oil, 2 gas)
D-18	OGFIND_L48	BETA2_FR3	B5	Cumulative developmental wells	Fuel (2 oil, 2 gas)
D-19	OGCOMP_AD	REGCNT	α	Regional constant coefficient	Lower 48 regions (6 onshore)
D-19	OGCOMP_AD	B1	β	Crude oil production	NA
D-19	OGCOMP_AD	RHO2	ρ	Autocorrelation parameter	NA

Outputs					
OGSM Subroutine	Variable Name	Description	Unit	Classification	Passed To Module
OGFOR_AK OGPIP_AK	OGANGTSMX	Maximum natural gas flow through ANGTS	BCF	NA	NGTDM
OGINIT_IMP	OGCNBLOSS	Gas lost in transit to border	BCF	6 US/Canadian border crossings	NGTDM (Not used)
OGINIT_IMP	OGCNCAP	Canadian capacities by border crossing	BCF	6 US/Canadian border crossings	NGTDM (Not used)
OGINIT_IMP XOGOUT_IMP	OGCNCON	Canada gas consumption	Oil: MMB Gas: BCF	Fuel(oil,gas)	--
OGINIT_IMP	OGCNDMLOSS	Gas lost from wellhead to Canadian demand	BCF	NA	NGTDM (Not used)
OGINIT_IMP	OGCNEXLOSS	Gas lost from US export to Canadian demand	BCF	NA	NGTDM (Not used)
OGINIT_IMP	OGCNFLW	1989 flow volumes by border crossing	BCF	6 US/Canadian border crossings	NGTDM (Not used)
OGINIT_IMP	OGCNPARM1	Actual gas allocation factor	fraction	NA	NGTDM (Not used)
OGINIT_IMP	OGCNPARM2	Responsiveness of flow to different border prices	fraction	NA	NGTDM (Not used)
OGINIT_IMP	OGCNPMARKUP	Transportation mark-up at border	1987\$	6 US/Canadian border crossings	NGTDM (Not used)
OGINIT_RES XOGOUT_IMP	OGELSCAN	Canadian price elasticity	fraction	Fuel (oil, gas)	--
OGINIT_RES OGOUT_L48 OGOUT_OFF	OGELSCO	Oil production elasticity	fraction	6 Lower 48 onshore & 3 Lower 48 offshore regions	PMM
OGINIT_RES OGOUT_OFF	OGELSNGOF	Offshore nonassociated dry gas production elasticity	fraction	3 Lower 48 offshore regions	NGTDM
OGINIT_RES OGOUT_L48	OGELSNGON	Onshore nonassociated dry gas production elasticity	fraction	17 OGSM/NGTDM regions	NGTDM
OGOUT_EOR	OGEORCOGC	Electric cogeneration capacity from EOR	MWH	6 Lower 48 onshore regions	Industrial (not used)
OGOUT_EOR	OGEORCOGG	Electric cogeneration volumes from EOR	MWH	6 Lower 48 onshore regions	Industrial (not used)
OGCOMP_AD	OGPRDAD	Associated-dissolved gas production	BCF	6 Lower 48 onshore regions & 3 Lower 48 offshore regions	NGTDM
OGINIT_RES XOGOUT_IMP	OGPRRCAN	Canadian P/R ratio	fraction	Fuels (oil, gas)	NGTDM

Outputs					
OGSM Subroutine	Variable Name	Description	Unit	Classification	Passed To Module
OGINIT_RES OGOUT_L48	OGPRRCO	Oil P/R ratio	fraction	6 Lower 48 onshore & 3 Lower 48 offshore regions	PMM
OGINIT_RES OGOUT_OFF	OGPRRNGOF	Offshore nonassociated dry gas P/R ratio	fraction	3 Lower 48 offshore regions	NGTDM
OGINIT_RES OGOUT_L48	OGPRRNGON	Onshore nonassociated dry gas P/R ratio	fraction	17 OGSM/NGTDM regions	NGTDM
OGFOR_AK OGPIP_AK OGPRO_AK	OGQANGTS	Gas flow at U.S. border from ANGTS	BCF	NA	NGTDM
OGINIT_IMP XOGOUT_IMP OGOUT_MEX	OGQNGEXP	Natural gas exports	BCF	6 US/Canada & 3 US/Mexico border crossings	NGTDM
OGLNG_OUT XOGOUT_IMP OGOUT_MEX	OGQNGIMP	Natural gas imports	BCF	3 US/Mexico border crossings; 4 LNG terminals	NGTDM
OGINIT_RES XOGOUT_IMP	OGRESCAN	Canadian end-of-year reserves	oil: MMB gas: BCF	Fuel (oil, gas)	NGTDM
OGINIT_RES OGOUT_L48 OGOUT_OFF	OGRESCO	Oil reserves	MMB	6 Lower 48 onshore & 3 Lower 48 offshore regions	PMM
OGINIT_RES OGOUT_OFF	OGRESNGOF	Offshore nonassociated dry gas reserves	BCF	3 Lower 48 offshore regions	NGTDM
OGINIT_RES OGOUT_L48	OGRESNGON	Onshore nonassociated dry gas reserves	BCF	17 OGSM/NGTDM regions	NGTDM

OFFSHORE OIL AND GAS SUPPLY SUBMODULE		
Parameter	Description	Value
nREG	Region ID (1: CENTRAL & WESTERN GOM; 2: EASTERN GOM; 3: ATLANTIC; 4: PACIFIC)	4
nPA	Planning Area ID (1: WESTERN GOM; 2: CENTRAL GOM; 3: EASTERN GOM; 4: NORTH ATLANTIC; 5: MID ATLANTIC; 6: SOUTH ATLANTIC; 7: FLORIDA STRAITS; 8: PACIFIC; NORTHWEST; 9: CENTRAL CALIFORNIA; 10: SANTA BARBARA - VENTURA BASIN; 11: LOS ANGELES BASIN; 12: INNER BORDERLAND; 13: OUTER BORDERLAND)	13
ntEU	Total number of evaluation units (43)	43
nMaxEU	Maximum number of EU in a PA (6)	6
TOTFLD	Total number of evaluation units	3600
nANN	Total number of announce discoveries	127
nPRD	Total number of producing fields	1132
nRIGTYP	Rig Type (1: JACK-UP 0-1500; 2: JACK-UP 0-1500 (Deep Drilling); 3: SUBMERSIBLE 0-1500; 4: SEMI-SUBMERSIBLE 1500-5000; 5: SEMI-SUBMERSIBLE 5000-7500; 6: SEMI-SUBMERSIBLE 7500-10000; 7: DRILL SHIP 5000-7500; 8: DRILL SHIP 7500-10000)	8
nPFTYP	Production facility type (1: FIXED PLATFORM (FP); 2: COMPLIANT TOWER (CT); 3: TENSION LEG PLATFORM (TLP); 4: FLOATING PRODUCTION SYSTEM (FPS); 5: SPAR; 6: FLOATING PRODUCTION STORAGE & OFFLOADING (FPSO); 7: SUBSEA SYSTEM (SS))	7
nPFWDR	Production facility water depth range (1: 0 - 656 FEET; 2: 656 - 2625 FEET; 3: 2625 - 5249 FEET; 4: 5249 - 7874 FEET; 5: 7874 - 9000 FEET)	5
NSLTIdx	Number of platform slot data points	8
NPFWD	Number of production facility water depth data points	15
NPLTDD	Number of platform water depth data points	17
NOFWD	Number of other production facility water depth data points	11
NCSTWD	Number of water depth data points for production facility costs	39
NDRLWD	Number of water depth data points for well costs	15
NWLDEP	Number of well depth data points	30
TRNPPLNCSTNDIAM	Number of pipeline diameter data points	19
MAXFIELDS	Maximum number of fields for a project/prospect	10
nMAXPRJ	Maximum number of projects to evaluate per year	500
PRJLIFE	Maximum project life in years	10

OFFSHORE OIL AND GAS SUPPLY SUBMODULE			
Variable	Description	Unit	Source
ann_EU	Announced discoveries - Evaluation unit name	-	OIAF
ann_FAC	Announced discoveries - Type of production facility	-	MMS
ann_FN	Announced discoveries - Field name	-	OIAF
ann_FSC	Announced discoveries - Field size class	integer	MMS
ann_OG	Announced discoveries - fuel type	-	MMS
ann_PRDSTYR	Announced discoveries - Start year of production	integer	MMS
ann_WD	Announced discoveries - Water depth	feet	MMS
ann_WL	Announced discoveries - Number of wells	integer	MMS
ann_YRDISC	Announced discoveries - Year of discovery	integer	MMS
beg_rsva	AD gas reserves	bcf	calculated in model
BOEtoMcf	BOE to Mcf conversion	Mcf/BOE	ICF
chgDrlCstOil	Change of Drilling Costs as a Function of Oil Prices	fraction	ICF
chgOpCstOil	Change of Operating Costs as a Function of Oil Prices	fraction	ICF
chgPFCstOil	Change of Production facility Costs as a Function of Oil Prices	fraction	ICF
condYld	Condensate yield by PA, EU	Bbl/mmcf	MMS
cstCap	Cost of capital	percent	MMS
dDpth	Drilling depth by PA, EU, FSC	feet	MMS
deprSch	Depreciation schedule (8 year schedule)	fraction	MMS
devCmplCst	Completion costs by region, completion type (1=Single, 2=Dual), water depth range (1=0-3000Ft, 2=>3000Ft), drilling depth index	million 2003 dollars	MMS
devDrlCst	Mean development well drilling costs by region, water depth index, drilling depth index	million 2003 dollars	MMS
devDrlDly24	Maximum number of development wells drilled from a 24-slot PF by drilling depth index	wells/PF/year	ICF
devDrlDlyOth	Maximum number of development wells drilled for other PF by PF type, water depth index	wells/field/year	ICF
devOprCst	Operating costs by region, water depth range (1=0-3000Ft, 2=>3000Ft), drilling depth index	2003 \$/well/year	MMS
devTangFrc	Development Wells Tangible Fraction	fraction	ICF
dNRR	Number of discovered producing fields by PA, EU, FSC	integer	MMS
drillcap	Drilling Capacity	wells/year/rig	ICF
duNRR	Number of discovered/undeveloped fields by PA, EU, FSC	integer	ICF

OFFSHORE OIL AND GAS SUPPLY SUBMODULE			
Variable	Description	Unit	Source
EUID	Evaluation unit ID	integer	ICF
EUname	Names of evaluation units by PA	integer	ICF
EUPA	Evaluation unit to planning area x-walk by EU_Total	integer	ICF
exp1stDly	Delay before commencing first exploration by PA, EU	number of years	ICF
exp2ndDly	Total time (Years) to explore and appraise a field by PA, EU	number of years	ICF
expDriCst	Mean Exploratory Well Costs by region, water depth index, drilling depth index	million 2003 dollars	MMS
expDriDays	Drilling days/well by rig type	number of days/well	ICF
expSucRate	Exploration success rate by PA, EU, FSC	fraction	ICF
expTangFrc	Exploration and Delineation Wells Tangible Fraction	fraction	ICF
fedTaxRate	Federal Tax Rate	percent	ICF
fldExpRate	Maximum Field Exploration Rate	percent	ICF
gasprice	Gas wellhead price by region	2003\$/mcf	NGTDM
gasSevTaxPrd	Gas production severance tax	2003\$/mcf	ICF
gasSevTaxRate	Gas severance tax rate	percent	ICF
GOprop	Gas proportion of hydrocarbon resource by PA, EU	fraction	ICF
GOR	Gas-to-Oil ratio (Scf/Bbl) by PA, EU	Scf/Bbl	ICF
GORCutOff	GOR cutoff for oil/gas field determination	-	ICF
gRGCGF	Gas Cumulative Growth Factor (CGF) for gas reserve growth calculation by year index	-	MMS
levDelWls	Exploration drilling technology (reduces number of delineation wells to justify development)	percent	OIAF
levDriCst	Drilling costs R&D impact (reduces exploration and development drilling costs)	percent	OIAF
levExpDly	Pricing impact on drilling delays (reduces delays to commence first exploration and between exploration)	percent	OIAF
levExpSucRate	Seismic technology (increase exploration success rate)	percent	OIAF
levOprCst	Operating costs R&D impact (reduces operating costs)	percent	OIAF
levPfcCst	Production facility cost R&D impact (reduces production facility construction costs)	percent	OIAF
levPfdly	Production facility design, fabrication and installation technology (reduces time to construct production facility)	percent	OIAF
levPrdPerf1	Completion technology 1 (increases initial constant production facility)	percent	OIAF
levPrdPerf2	Completion technology 2 (reduces decile rates)	percent	OIAF

OFFSHORE OIL AND GAS SUPPLY SUBMODULE			
Variable	Description	Unit	Source
nDelWls	Number of delineation wells to justify a production facility by PA, EU, FSC	integer	ICF
nDevWls	Maximum number of development wells by PA, EU, FSC	integer	ICF
nEU	Number of evaluation units in each PA	integer	ICF
nmEU	Names of evaluation units by PA	-	ICF
nmPA	Names of planning areas by PA	-	ICF
nmPF	Name of production facility and subsea-system by PF type index	-	ICF
nmReg	Names of regions by region	-	ICF
ndiroff	Additions to inferred reserves by region and fuel type	oil: MBbls; gas: Bcf	calculated in model
nrdoff	New reserve discoveries by region and fuel type	oil: Mbbls; gas: Bcf	calculated in model
nRigs	Number of rigs by rig type	integer	ICF
nRigWlsCap	Number of well drilling capacity (Wells/Rig)	wells/rig	ICF
nRigWlsUtl	Number of wells drilled (Wells/Rig)	wells/rig	ICF
nStt	Number of slots by # of slots index	integer	ICF
oilPrcCstTbl	Oil price for cost tables	2003\$/Bbl	ICF
oilprice	Oil wellhead price by region	2003\$/Bbl	PMM
oilSevTaxPrd	Oil production severance tax	2003\$/Bbl	ICF
oilSevTaxRate	Oil severance tax rate	percent	ICF
oRGCGF	Oil Cumulative Growth Factor (CGF) for oil reserve growth calculation by year index	fraction	MMS
paid	Planning area ID	integer	ICF
PAname	Names of planning areas by PA	-	ICF
pfBldDly1	Delay for production facility design, fabrication, and installation (by water depth index, PF type index, # of slots index (0 for non platform)	number of years	ICF
pfBldDly2	Delay between production facility construction by water depth index	number of years	ICF
pfCst	Mean Production Facility Costs in by region, PF type, water depth index, # of slots index (0 for non-platform)	million 2003 \$	MMS
pfCstFrc	Production facility cost fraction matrix by year index, year index	fraction	ICF
pfMaxNFld	Maximum number of fields in a project by project option	integer	ICF
pfMaxNWls	Maximum number of wells sharing a flowline by project option	integer	ICF
pfMinNFld	Minimum number of fields in a project by project option	integer	ICF

OFFSHORE OIL AND GAS SUPPLY SUBMODULE			
Variable	Description	Unit	Source
pfOptFlg	Production facility option flag by water depth range index, FSC	-	ICF
pfTangFrc	Production Facility Tangible Fraction	fraction	ICF
pfTypFlg	Production facility type flag by water depth range index, PF type index	-	ICF
platform	Flag for platform production facility	-	ICF
prd_DEPTH	Producing fields - Total drilling depth	feet	MMS
prd_EU	Producing fields - Evaluation unit name	-	ICF
prd_FLAG	Producing fields - Production decline flag	-	ICF
prd_FN	Producing fields - Field name	-	MMS
prd_ID	Producing fields - MMS field ID	-	MMS
prd_OG	Producing fields - Fuel type	-	MMS
prd_YRDISC	Producing fields - Year of discovery	year	MMS
prdGasDecRatei	Initial gas decline rate by PA, EU, FSC range index	fraction/year	ICF
prdGasHyp	Gas hyperbolic decline coefficient by PA, EU, FSC range index	fraction	ICF
prdDOilDecRatei	Initial oil decline rate by PA, EU,	fraction/year	ICF
prdDOilHyp	Oil hyperbolic decline coefficient by PA, EU, FSC range index	fraction	ICF
prdDYrPeakGas	Years at peak production for gas by PA, EU, FSC, range index	number of years	ICF
prdDYrPeakOil	Years at peak production for oil by PA, EU, FSC, range index	number of years	ICF
prdDYrRampUpGas	Years to ramp up for gas production by PA, EU, FSC range index	number of years	ICF
prdDYrRampUpOil	Years to ramp up for oil production by PA, EU, FSC range index	number of years	ICF
prdGasDecRatei	Initial gas decline rate by PA, EU	fraction/year	ICF
prdGasFrc	Fraction of gas produced before decline by PA, EU	fraction	ICF
prdGasHyp	Gas hyperbolic decline coefficient by PA, EU	fraction	ICF
prdGasRatei	Initial gas production (Mcf/Day/Well) by PA, EU	mcf/day/well	ICF
PR	Expected production to reserves ratio by fuel typ	fraction	OIAF
prdoff	Expected production by fuel type	oil:MBbls; gas: Bcf	calculated in model
prdOilDecRatei	Initial oil decline rate by PA, EU	fraction/year	ICF
prdOilFrc	Fraction of oil produced before decline by PA, EU	fraction	ICF

OFFSHORE OIL AND GAS SUPPLY SUBMODULE			
Variable	Description	Unit	Source
prdOilHyp	Oil hyperbolic decline coefficient by PA, EU	fraction	ICF
prdOilRatei	Initial oil production (Bbl/Day/Well) by PA, EU	Bbl/day/well	ICF
prod	Producing fields - annual production by fuel type	oil:MBbls; gas:Mmcf	MMS
prod_asg	AD gas production	bcf	calculated in model
revoff	Extensions, revisions, and adjustments by fuel type	oil:MBbls; gas:Bcf	
rigBldRatMax	Maximum Rig Build Rate by rig type	percent	ICF
rigIncrMin	Minimum Rig Increment by rig type	integer	ICF
RigUtil	Number of wells drilled	wells/rig	ICF
rigUtilTarget	Target Rig Utilization by rig type	percent	ICF
royRateD	Royalty rate for discovered fields by PA, EU, FSC	fraction	MMS
royRateU	Royalty rate for undiscovered fields by PA, EU, FSC	fraction	MMS
stTaxRate	Federal Tax Rate by PA, EU	percent	ICF
trnFlowLineLen	Flowline length by PA, EU	miles/prospect	ICF
trnPpDiam	Oil pipeline diameter by PA, EU	inches	ICF
trnPpInCst	Pipeline cost by region, pipe diameter index, water depth index	million 2003 \$/mile	MMS
trnTrfGas	Gas pipeline tariff (\$/Mcf) by PA, EU	2003 \$/Bbl	ICF
trnTrfOil	Oil pipeline tariff (\$/Bbl) by PA, EU	2003 \$/Bbl	ICF
uNRR	Number of undiscovered fields by PA, EU, FSC	integer	calculated in model
vMax	Maximum MMBOE of FSC	MMBOE	MMS
vMean	Geometric mean MMBOE of FSC	MMBOE	MMS
vMin	Minimum MMBOE of FSC	MMBOE	MMS
wDpth	Water depth by PA, EU, FSC	feet	MMS
yrAvl	Year lease available by PA, EU	year	ICF
yrCstTbl	Year of cost tables	year	ICF

Sources: MMS = Minerals Management Service; ICF = ICF Consulting; OIAF = EIA, Office of Integrating Analysis and Forecasting

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
-	BASLOC	Basin Location: The basin/play name	NA	UGR Type; Play	ARI/USGS
-	PNUM	Play Number: The play number established by ARI	-	UGR Type; Play	ARI
ATUNDRLOC	ATUL	Undrilled Locations - Advanced Technology: Number of locations available to drill under advanced technology	-	UGR Type; Play; Quality ¹	ARI
AVDEPTH	AVGDPH	Average Depth: Average depth of the play	Feet	UGR Type; Play; Quality	ARI
BASINDIFF	BASNDIF	Basin Differential: This is a sensitivity on the gas price at a basin level. Depending on their proximity to market and infrastructure, the price varies throughout the country. The numbers are constant throughout the model.	1996\$/Mcf	UGR Type; Play; Quality	ARI
BNAREA	BASAR	Basin Area: Area in square miles	Square Miles	UGR Type; Play; Quality	ARI
CAPCSTDH	CCWDH	Capital Costs with Dry Hole Costs	1996\$/Mcf	UGR Type; Play; Quality	ARI
CTUNDRLOC	CTUL	Undrilled Locations - Current Technology: Current number of locations available to drill	-	UGR Type; Play; Quality	ARI
DCCOST	DACC	Drilling and completion costs	1996\$	UGR Type; Play; Quality	ARI
DCCOSTGT	DCC_G2K	Drilling and completion cost per foot, well is greater than 2000 feet.	1996\$/Foot	UGR Type	ARI

¹The four "Quality" Categories are Total, Best 30%, Next Best 30%, and Worst 40%.

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
DCCOSTLT	DCC_L2K	Cost per foot, well is less than 2000 feet.	1996\$/ Foot	UGR Type	ARI
DEVCELLS	DEV_CEL	Developed Cells: Number of locations already drilled	-	UGR Type; Play; Quality	ARI
DISCFAC	DIS_FAC	Discount Factor: This is the discount factor that is applied to the EUR for each well. The Present Value of a production stream from a typical coalbed methane, tight sands, or gas shales well is discounted at a rate of 15%.over a twenty year period.	Fraction	UGR Type	ARI
DISCRES	DISCRES	Discounted Reserves: The mean EUR per well multiplied by the discount factor.	Bcf	UGR Type; Play; Quality	Calculated
DRILLSCHED	DRL_SCHED	Drilling Schedule	Years	UGR Type; Play; Quality	ARI
DRILLSCHED	DRL_SCHED2	Drilling Schedule adjusted to account for technological progress	Years	UGR Type; Play; Quality	ARI
DRILLSCHED	DRL_SCHED3	Drilling Schedule: This variable ensures that adjustment for technology did not result in negative value for emerging basin Drilling Schedule.	Years	UGR Type; Play; Quality	ARI
DRILLSCHED	DRL_SCHED4	Drilling Schedule: This variable adjusts to account for the time-delaying effect of access limitations	Years	UGR Type; Play; Quality	ARI
DRRESADDS	DRA	Drilled Reserve Additions	Bcf	UGR Type; Play; Quality	Calculated
DRYHOLECOST	DHC	Dry Hole Costs	1996\$/ Well	UGR Type; Play; Quality	Calculated

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
EMBASINYRS* FINFAC	EMERG#	The number of years taken off the drilling schedule for an advancement in technology.	Years	UGR Type; Play	ARI
EMERGBAS	EMRG	The parameter that determines if the play is an emerging basin. This designation was made by ARI (1=yes).	-	UGR Type; Play; Quality	ARI
ENCBMYRCST	ECBM_OC	Enhanced CBM Operating Costs Variable - \$1.00	1996\$/ Mcf	UGR Type[CBM]; Basin; Quality	ARI
ENVIRONREG	ENV%	The percentage of the play that is not restricted from development due to environmental or pipeline regulations	Fraction	UGR Type; Play	ARI
ENVPIPREG	ENPRGS	Establishes if the play is pipeline or environmentally regulated (1=yes).	-	UGR Type; Play; Quality	ARI
EXNPVREV	ENPVR	Expected NPV Revenues: Gives the value of the entire discounted production stream for one well in real \$.	1996\$/ Well	UGR Type; Play; Quality	Calculated
FINFAC	TECHYRS	Number of years (from base year) over which incremental advances in indicated technology have occurred	Years	-	Calculated
FIXOMCOST	FOMC	Fixed Operating and Maintenance Costs	1996\$/ Well	UGR Type; Play; Quality	Calculated
GA10	GAA10	Variable General and Administrative (G&A) Costs:	1996\$/ Well	UGR Type; Play; Quality	Calculated
GABASE	RST	Variable G&A Costfactor - Currently 10% of equipment costs, stimulation costs, and drilling costs	Fraction	UGR Type; Play; Quality	Calculated
H2OBASE	WOML_WTR	Water Producing Well Lease Equipment Costs	1996\$/ Well	UGR Type; EUR Level	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
H2ODISP	WATR_DISP	Establishes if the play requires water disposal (1 = yes)	-	UGR Type; Play; Quality	ARI
HYPPLAYS	HYP%	Establishes whether or not the play is hypothetical (1=yes)	-	UGR Type; Play; Quality	ARI
LANDGG	DCC_G&G	Land / G&G Costs	1996\$/ Well	UGR Type; EUR level	ARI
LANDGGH2O	WOMM_OMW	Operating & Maintenance - Medium well with H2O disposal	\$1996/ Well	UGR Type; EUR Level	ARI
LANDGGH2O	WOMS_OMW	Operating & Maintenance - Small well with H2O disposal	\$1996/ Well	UGR Type; EUR Level	ARI
LANDGGH2O	WOML_OMW	Operating & Maintenance - Large well with H2O disposal	\$1996/ Well	UGR Type; EUR Level	ARI
LEASSTIP	LEASSTIP	Lease Stipulated Share: The percentage of undrilled locations in a play that are subject to Federal lease stipulations	Percent	UGR Type; Play	ARI
LEASEQUIP	LSE_EQ	Lease Equipment Costs	\$1996/ Well	UGR Type; Play; Quality	ARI
LSEQBASE	WOML_LE	Large Well Lease Equipment Costs	\$1996/ Well	UGR Type; EUR Level	ARI
LSEQBASE	WOMS_LE	Small Well Lease Equipment Costs	\$1996/ Well	UGR Type; EUR Level	ARI
LSEQBASE	WOMM_LE	Medium Well Lease Equipment Costs	\$1996/ Well	UGR Type; EUR Level	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
MEANEUR	MEUR1	A weighted average of the EUR values for each (entire) basin	Bcf/Well	UGR Type; Play; Quality	Calculated
MEANEUR	MEUR1	A weighted average of the EUR values for the best 30% of the wells in the basin	Bcf/Well	UGR Type; Play; Quality	Calculated
MEANEUR	MEUR1	A weighted average of the EUR values for the middle 30% of the wells in the basin	Bcf/Well	UGR Type; Play; Quality	Calculated
MEANEUR	MEUR1	A weighted average of the EUR values for the worst 40% of the wells in the basin	Bcf/Well	UGR Type; Play; Quality	Calculated
MEANEUR	MEUR2	For Coalbed Methane, "MEUR1" adjusted for technological progress in the development of new cavity fairways	Bcf/Well	UGR Type; Play; Quality	Calculated
MEANEUR	MEUR3	For Enhanced Coalbed Methane, "MEUR2" adjusted for technological progress in the commercialization of Enhanced Coalbed Methane	Bcf/Well	UGR Type; Play; Quality	Calculated
MEANEUR	MEUR4	Mean EUR: This variable establishes whether or not the play is profitable and if so, allows the EUR to appear for development.	Bcf/Well	UGR Type; Play; Quality	Calculated
MIN_ROI	MIN_ROI	A risk premium - the minimum rate of return that a project must be expected to achieve to offset risk of investment	1996\$/Mcf	UGR Type	ARI
NETPR	NET_PRC	Net Price (\$/Mcf): Including Royalty and Severance Tax	1996\$/Mcf	UGR Type; Play; Quality	Calculated
NETPROFIT	NET_PROF	Net Profits (\$/Mcf)	1996\$/Mcf	UGR Type; Play; Quality	Calculated
NETPROFIT	NET_PROF2	Net Profits (changed to 0 if < 0): Allows only the profitable plays to become developed	1996\$/Mcf	UGR Type; Play; Quality	Calculated

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
NEWWELLS	NW_WELLS	New Wells: The amount of wells drilled for the play in that year	Wells	UGR Type; Play; Quality	Calculated
NEWWELLS_LAG	NW_WELLS_LAG	New Wells Lagged: The amount of wells drilled for the play in the previous year	Wells	UGR Type; Play; Quality	Calculated
NEWWELLS	NW_WELLS2	New Wells: This variable ensures the wells drilled is a positive value.	Wells	UGR Type; Play; Quality	Calculated
NOACCESS	NOACCESS	No Access Share: The percentage of undrilled locations in a play that are legally inaccessible	Percent	UGR Type; Play	ARI
NYR_UNDEVWELLS	UNDV_WELLS2	Undeveloped wells available to be drilled for the next year	Wells	UGR Type; Play; Quality	Calculated
1.32*OGPRCL48	WHGP	Wellhead Gas Price	1996\$/Mcf	UGR Type; OGSM Region	NGTDM (Integrated); Input (Standalone)
OPCOSTH2O	OCWW\$	Operating Costs with H2O - \$0.30	1996\$/Mcf	UGR Type; H2O Disposal Level	ARI
OPCOSTH2O	OCNW\$	Operating Costs without H2O - \$0.25	\$1996/Mcf	UGR Type; H2O Disposal Level	ARI
OPCSTGASTRT	GASTR	Gas Treatment and Fuel costs - \$0.25	\$1996/Mcf	UGR Type	ARI
OPCSTH2ODISP	WTR_DSPT	Water Disposal Fee: \$0.05	\$1996/Mcf	UGR Type	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
OPCSTOMS	WOMS	H2O Costs, Small Well	\$1996/ Mcf	UGR Type	ARI
PLAYPROBBASE	PLPROB	The play probability: Only hypothetical plays have a PLPROB < 100%.	Fraction	UGR Type; Play; Quality	ARI
PLAYPROB	PLPROB2	The play probability adjusted for technological progress, if initial play probability less than 1.	Fraction	UGR Type; Play; Quality	Calculated
PMPSFEQBASE	BASET	Variable cost of Pumping and Surface equipment when H2O disposal is required.	1996\$/ Well	UGR Type; Play; Quality	ARI
PMPSURFEQ	PASE	Pumping and Surface Equipment Costs	1996\$/ Well	UGR Type; Play; Quality	Calculated
PROD	PROD	Current Production	Bcf	UGR Type; Play; Quality	Calculated
PROD	PROD2	Production for the next year	Bcf	UGR Type; Play; Quality	Calculated
PROVRESV	PROV_RES	Proved Reserves	Bcf	UGR Type; Play; Quality	Calculated
PROVRESV	PROV_RES2	Proved Reserves for the next year	Bcf	UGR Type; Play; Quality	Calculated
RESADDS	R_ADD	Total Reserve Additions	Bcf	UGR Type; Play; Quality	Calculated

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
RESGRADDS	RGA	Reserve Growth Additions	Bcf	UGR Type; Play; Quality	Calculated
RESGRWTH	RES_GR	Establishes whether or not the play will have reserve growth (1=yes)	-	UGR Type; Play; Quality	ARI
RESWELLBCFB	RW101	Reserves per Well for the best 10% of the play (year 1): an EUR estimate	Bcf/Well	UGR Type; Play; Quality	ARI
RESWELLBCFB	RW201	Reserves per Well for the next (lesser) 20% of the play (year 1): an EUR estimate	Bcf/Well	UGR Type; Play; Quality	ARI
RESWELLBCFB	RW301	Reserves per Well for the next (lesser) 30% of the play (year 1): an EUR estimate	Bcf/Well	UGR Type; Play; Quality	ARI
RESWELLBCFB	RW401	Reserves per Well for the worst 40% of the play (year 1): an EUR estimate	Bcf/Well	UGR Type; Play; Quality	ARI
RESWELLBCF	RW101	Reserves per Well for the best 10% of the play (years 2,20)	Bcf/Well	UGR Type; Play; Quality	Calculated
RESWELLBCF	RW201	Reserves per Well for the next (lesser) 20% of the play (years 2,20)	Bcf/Well	UGR Type; Play; Quality	Calculated
RESWELLBCF	RW301	Reserves per Well for the next (lesser) 30% of the play (years 2,20)	Bcf/Well	UGR Type; Play; Quality	Calculated
RESWELLBCF	RW401	Reserves per Well for the worst 40% of the play (years 2,20)	Bcf/Well	UGR Type; Play; Quality	Calculated
RES_GRTH_DEC	RGR	Reserve Growth Rate	Fraction	UGR Type; Year	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
ROYSEVTAX	RST	Variable Royalty and Severance Tax - Set at 17%	Fraction	UGR Type	ARI
RP	R/P_RAT	Reserves-to-Production (R/P) Ratio	Fraction	UGR Type; Play; Quality	Calculated
RP	RP_RAT2	R/P Ratio for the next year	Fraction	UGR Type; Play; Quality	Calculated
RSVPRD	RESNPROD	Reserves and Production	Bcf	UGR Type; Play; Quality	Calculated
STIMCOST	STIMC	Stimulation Costs: Provides the cost of stimulating a well in the specific basin by multiplying the given average stimulation cost by the number of stimulation zones.	1996\$/Well	UGR Type; Play; Quality	ARI
STIMCSTBASE	STIM_CST	Variable average cost of stimulating one zone. (Number of zones is a variable)	1996\$/Zone	UGR Type	ARI
STIMUL	SZONE	Stimulation Zones: Number of times a single well is stimulated in the play	-	UGR Type; Play; Quality	ARI
SUCRATE	SCSSRT	Success Rate : The ratio of successful wells over total wells drilled (This can also be called the dry hole rate if you use the equation 1 - SCSSRT).	Fraction	UGR Type; Play; Quality	ARI
TECHRECWELL	TRW1	The amount of technically recoverable wells available regardless of economic feasibility.	Wells	UGR Type; Play; Quality	Calculated
TECH_PROG_ SCHED_DR	REDAM%	Total percentage increase over development period due to advances in "Reduced Damage D&S" technology	Fraction	UGR Type	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
TECH_PROG_ SCHED_DR	FRCLEN%	Total percentage increase over development period due to advances in "Increased Fracture Length L&C" technology	Fraction	UGR Type	ARI
TECH_PROG_ SCHED_DR	PAYCON%	Total percentage increase over development period due to advances in "Improved Pay Contact" technology	Fraction	UGR Type	ARI
TECH_PROG_ SCHED_EX	EMERG%	The number of years added onto the drilling schedule because of the hindrance of the play being an emerging basin.	Years	UGR Type	ARI
TECH_PROG_ SCHED_PT	WDT%	Total percentage decrease in H2O disposal and treatment costs over the development period due to technological advances	Fraction	UGR Type	ARI
TECH_PROG_ SCHED_PT	PUMP%	Total percentage decrease in pumping costs over the development period due to technological advances	Fraction	UGR Type	ARI
TECH_PROG_ SCHED_PT	GTF%	Total percentage decrease in gas treatment and fuel costs over the development period due to technological advances	Fraction	UGR Type	ARI
TECH_PROG_ SCHED_PT	LOW%	The percentage of the play that is restricted from development due to environmental or pipeline regulations	Fraction	UGR Type	ARI
TECH_PROG_ SCHED_PT	LOWYRS	The number of years the environmental and or pipeline regulation will last.	Years	UGR Type	ARI
TECH_PROG_ SCHED_PT	ENH_CBM%	Enhanced CBM EUR Percentage gain	Fraction	UGR Type[CBM]	ARI
TECH_PROG_ SCHED_EX	DEVPER	Development period for "Favorable Settings" technological advances	Years	UGR Type	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
TOTCAPCOST	TCC	Total Capital Costs: The sum of Stimulation Costs, Pumping and Surface Equipment Costs, Lease Equipment Costs, G&A Costs and Drilling and Completion Costs	1996\$/Well	UGR Type; Play; Quality	Calculated
TOTCOST	TOTL_CST	Total Costs (\$/Mcf)	1996\$/Mcf	UGR Type; Play; Quality	Calculated
ULTRECV	URR	Ultimate Recoverable Resources	Bcf	UGR Type; Play; Quality	Calculated
UNDEVRES	UNDEV_RES	Undeveloped resources	Bcf	UGR Type; Play; Quality	Calculated
UNDEV_WELLS	UNDV_WELLS	Undeveloped wells available for development under current economic conditions	Wells	UGR Type; Play; Quality	Calculated
VAROPCOST	VOC	Variable Operating Costs	1996\$/Mcf	UGR Type; Play; Quality	Calculated
VAROPCOST	VOC2	Variable Operating Costs: Includes an extra operating cost for plays that will incorporate the technology of Enhanced CBM in the future	1996\$/Mcf	UGR Type; Play; Quality	Calculated
WELLSP	WSPAC_CT	Well Spacing - Current Technology: Current spacing in acres	Acres	UGR Type; Play; Quality; Technology Level	ARI
WELLSP	WSPAC_AT	Well Spacing - Advanced Technology: Spacing in acres under Advanced Technology	Acres	UGR Type; Play; Quality; Technology Level	ARI

Unconventional Gas Recovery Supply Submodule					
Variable Name		Brief Description	Unit	Classification	Source
Code	Text				
.6*LANDGGH2O	WOMS_OM	Operating & Maintenance - Small well without H2O disposal	\$1996/ Well	UGR Type; EUR Level	ARI
.6*LANDGGH2O	WOMM_OM	Operating & Maintenance - Medium well without H2O disposal	\$1996/ Well	UGR Type; EUR Level	ARI
.6*LANDGGH2O	WOML_OM	Operating & Maintenance - Large well without H2O disposal	\$1996/ Well	UGR Type; EUR Level	ARI

Appendix B. Bibliography

Aerospace Corporation. 1976. *Alaska Natural Gas Transportation Systems Economic and Risk Analysis*.

Advanced Resources International: "Naturally Fractured Tight Gas Reservoir Detection Optimization", Quarterly Status Report for US DOE - METC, Contract number DE-AC21-93MC30086, May 23, 1997.

Allied Technology Group, Inc. 1996. "Model Quality Audit Report: Final Report - Oil and Gas Supply Module."

American Petroleum Institute. November 1996. "Joint Association Survey on 1995 Drilling Costs", Finance, Accounting, and Statistics Department, Washington D.C.

American Petroleum Institute. November 1997. "Joint Association Survey on 1996 Drilling Costs", Finance, Accounting, and Statistics Department, Washington D.C.

Argonne National Laboratory, Environmental Assessment and Information Sciences Division. June 7, 1991 (revised draft). *National Energy Strategy Environmental Analysis Model (NESEAM): Documentation and Findings*, prepared for the DOE Office of Policy, Planning, and Analysis under contract W-31-109-Eng-38.

Arps, J.J. and T.G. Roberts. 1958. "Economics of Drilling for Cretaceous Oil on East Flank of Denver-Julesburg Basin," *Bulletin of American Association of Petroleum Geologists*, Vol. 42, No. 11 (November) pp. 2549-2567.

Attanasi, E.D., L.J. Drew, and D.H. Root. 1981. "Physical Variables and the Petroleum Discovery Process" in James Ramsey, ed., *The Economics of Exploration for Energy Resources* (Greenwich: JAI Press).

Attanasi, E.D. and Haynes, J.L. 1983. "Future Supply of Oil and Gas from the Gulf of Mexico", U.S. Geological Survey Professional Paper 1294, U.S. Geological Survey.

Bacigalupi, Suzan M., et al. October 1996. "Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1995", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Bailey, Ralph E. and Curtis, L.B. June 1984. "Enhanced Oil Recovery", National Petroleum Council report Submitted to the Secretary of Energy, National Petroleum Council, Washington D.C.

Baker, R.A., Gehman, H.M., James, W.R., and White, D.A. 1984. "Geologic Field Number and Size Assessments of Oil and Gas Plays," *The American Association of Petroleum Geologists Bulletin*, Vol 68, No. 4, pages 426-437.

Beach, C. and MacKimmon, J. 1978. "A Maximum Likelihood Procedure for Regression with Autocorrelated Errors," *Econometrica*, Vol. 46, pages 51-58.

Behrenbruch, Peter. January 1995. "Deepwater Drilling & Production: Floating Production Facilities Key to Lower Cost Deepwater Development", HP Petroleum, Oil and Gas Journal.

Beltramo, M., Manne a., Weyant J., *The Energy Journal*, 7 (July 1986), pp.15-32.

Bird, K.J. 1986. "A Comparison of the Play Analysis Techniques as Applies in Hydrocarbon Resource Assessments of the National Petroleum Reserve in Alaska and the Arctic National Wildlife Refuge," in

Rice, D.D., ed., *Oil and Gas Assessment, Methods and Applications*, American Association of Petroleum Geologists Studies in Geology, No. 21, Tulsa.

Bourgoyne Jr., A.T., et al. 1991. "Applied Drilling Engineering", Society of Petroleum Engineers (SPE) Textbook Series, Vol. 2, Second Printing, Society of Petroleum Engineers, Richardson, Texas.

Bowers, B., Kutney, R., "Trends in Crude Oil and Natural Gas Reserves Additions Rates and Marginal Supply Costs for Western Canada," *Journal of Canadian Petroleum Technology*, May-June 1989, vol 28 #3, pp. 88-94.

Brown, Kevin, J., "Towards A Continental Natural Gas Market: Historical Perspectives And Long-Term Outlook," *Canadian Energy Research Institute*, Study No. 26, March 1988.

Canadian Energy Research Institute, *Continental Natural Gas Market: Canadian Export Capacity in the 90s*, Study No. 32, October 1989.

Cazalet, E.G. 1977. *Generalized Equilibrium Modeling: The Methodology of the SRI-Gulf Energy Model*, Decision Focus Incorporated, Palo Alto, CA and Stanford Research Institute, Menlo Park, CA.

Chapman, L. Randy, et al. November 1995. "Platform/Pipeline Construction: Containing Field Abandonment Costs in the Gulf of Mexico", *Oil and Gas Journal*.

Cherniavsky, E.A., and Juang, L.L. October 1979. *Resource Submodels of the Long-Range Energy Analysis Program: Documentation*, Report to the Division of Long-range Analysis, Energy Information Administration, Washington.

Cherniavsky, E.A. May 1982. "Oil/Gas Supply Modeling Considerations in Long-range Forecasting," in Gass, S.I., *Oil and Gas Supply Modeling, Proceedings of a Symposium held at the Department of Commerce, Washington, D.C., June 18-20, 1980*, U.S. Department of Commerce, NBS Special Publication 631.

Cox, J., and Wright, A. 1976. "The Determinants of Investment in Petroleum Reserves and Their Implications for Public Policy," *American Economic Review*, Vol. 66, No. 1, pages 153-167.

Cranswick, Deborah and Regg, James. February 1997. "Deepwater in the Gulf of Mexico: America's New Frontier", OCS Report MMS 97 -0004, U.S. Minerals Management Service, New Orleans.

Davis, J.C., and Harbaugh, J.W. 1981. "A Simulation Model for Oil Exploration Policy on Federal Lands of the U.S. Outer Continental Shelf," in Ramsey, J., ed., *The Economics of Exploration for Energy Resources*, JAI Press, Greenwich.

Deacon, R., et al. 1983. *The Proposed California Crude Oil Severance Tax: An Economic Analysis*, The Economics Group, Inc., Santa Barbara.

Department of Revenue, State of Alaska. 1989, 1990, and 1991. *Petroleum Production Revenue Forecast*. Alaska.

Drew, L.J., Schuenemeyer, J.H., and Bawiec, W.J. 1982. *Estimation of the Future Rate of Oil and Gas Discovery in the Gulf of Mexico*, U.S. Geologic Survey Professional Paper, No. 252, Reston, VA.

DRI/McGraw-Hill, *Energy Review: Natural Gas Market Focus*, Standard & Poor's Corporation, Lexington, Massachusetts, 1990.

Dutton, Shirley P., Clift, Sigrid J., Hamilton, Douglas S., Hamlin, H. Scott, Hantzs, Tucker F., Howard, William E., Akhter, M. Saleem, Laubach, Stephen E.: "Major Low-Permeability-Sandstone Gas Reservoirs in the Continental United States" Bureau of Economic Geology - University of Texas and Gas Research Institute, 1993.

Eckbo, P.L., Jacoby, H.D., and Smith, J.L. 1978. "Oil Supply Forecasting: A Disaggregated Process Approach," *Bell Journal of Economics*, Vol. 9, No. 1, pages 218-235.

Energy and Environmental Analysis Inc., *Costs for LNG Imports Into the United States*, prepared for Gas Research Institute, GRI Contract #5087-800-1474, August 1988.

Energy and Environmental Analysis Inc. 1991. "Import and Supplemental Gas Supply," prepared for the Source and Supply Task Group of the National Petroleum Council Natural Gas Study.

Energy Information Administration: "Annual Energy Outlook 1999 - With Projections to 2020", Energy Information Administration, Office of Integrated Analysis and Forecasting, U.S. Department of Energy, December, 1998.

Energy Information Administration: "Annual Energy Outlook 1998 - With Projections to 2020", Energy Information Administration, Office of Integrated Analysis and Forecasting, U.S. Department of Energy, December, 1997.

Energy Information Administration: "Annual Energy Outlook 1997 - With Projections to 2015", Energy Information Administration, Office of Integrated Analysis and Forecasting, U.S. Department of Energy, December, 1996.

Energy Information Administration: "Annual Energy Outlook 1996 - With Projections to 2015", Energy Information Administration, Office of Integrated Analysis and Forecasting, U.S. Department of Energy, January, 1996.

Energy Information Administration: "US Crude Oil, Natural Gas, and Natural Gas Liquids Reserves - Annual Report 1997", Energy Information Administration, Office of Oil and Gas, U.S. Department of Energy, December, 1998.

Energy Information Administration: "US Crude Oil, Natural Gas, and Natural Gas Liquids Reserves - Annual Report 1996", Energy Information Administration, Office of Oil and Gas, U.S. Department of Energy, December, 1997.

Energy Information Administration: "US Crude Oil, Natural Gas, and Natural Gas Liquids Reserves - Annual Report 1995", Energy Information Administration, Office of Oil and Gas, U.S. Department of Energy, November, 1996.

Energy Research Associates, *The Reemergence of LNG - A Global Perspective, Volume I*, 1989.

Epple, D. 1975. *Petroleum Discoveries and Government Policy: An Econometric Study of Supply*, Ballinger Publishing Company, Cambridge, Mass.

Epple, D. 1985. "The Econometrics of Exhaustible Resource Supply: A Theory and an Application," in Sargent, T.J., ed., *Energy Foresight and Strategy*, Resources for the Future, Washington.

Erickson, E.W., and Spann, R.M. 1971. "Supply Response in a Regulated Industry: The Case of Natural Gas," *The Bell Journal of Economics and Management Science*, Vol. 2, No. 1, pages 94-121.

Erickson, E.W., Millsaps, S.W., and Spann, R.M. 1974. "Oil Supply and Tax Incentives," *Brookings Papers on Economic Activity*, Vol. 2, pages 449-493.

Executive Office of the President. 1977. Decision and Report to Congress on the Alaska Natural Gas Transportation System. Energy Policy and Planning.

Eyssell, J.H. "The Supply Response of Crude Petroleum: New and Optimistic Results," *Business Economics*, Vol. 13, No. 3, pages 15-28.

Farmer, Richard D., Harris, Carl M., Murphy, Frederic H., and Damuth, Robert J. 1984. "The Outer continental Shelf Oil and gas Supply model of the Energy Information Administration," *North-Holland European Journal Of Operation Research*, 18.

Fisher, F.M. 1964. *Supply and Costs in the United States Petroleum Industry*, Johns Hopkins University Press for Resources for the Futures, Baltimore.

Fisher, W.L., et al, 1988, *An Assessment of the Natural Gas Resource Base of the United States*, Bureau of Economic Geology, University of Texas at Austin, Austin, Texas.

Gas Research Institute, *Baseline Projection Data Book: The 1989 GRI Baseline Projection of U.S. Energy Supply and Demand to 2010*, Strategic Planning and Analysis Division, Washington, DC, 1990.

Frantz, Joe: "Technology Applications Improve Antrim Shale Well Recoveries and Economics", GRI Gas Tips, Gas Research Institute, Winter, 1995/1996, p.5-11.

Gas Research Institute: "Advanced Stimulation Technology: Success in the Anadarko Basin", GRI Gas Tips, Gas Research Institute, Baseline / Gas Resource Analytical Center, August, 1996.

Gas Research Institute: "Baseline Projection Data Book - 1998 Edition of the GRI Baseline Projection of US Energy Supply and Demand to 2015", Gas Research Institute, Baseline / Gas Resource Analytical Center, 1997.

Gas Research Institute: "Baseline Projection Data Book - 1997 Edition of the GRI Baseline Projection of US Energy Supply and Demand to 2015", Gas Research Institute, Baseline / Gas Resource Analytical Center, 1996.

Gas Research Institute: "GRI Baseline Projection of US Energy Supply and Demand - 1997 Edition, 'The Contribution of Technology,'" Gas Research Institute, Baseline / Gas Resource Analytical Center, August, 1996.

Gas Research Institute, "The Long-Term Trends in U.S. Gas Supply and Prices: The 1989 GRI Baseline Projection of U.S. Energy Supply and Demand to 2010," as published in *Gas Research Insights*, Strategic Planning and Analysis Division, Washington, DC, 1990.

Gas Research Institute (GRI). 1990. *Guide to the Hydrocarbon Supply Model*, prepared for the Gas Research Institute by Energy and Environmental Analysis, Inc., Washington, DC.

Goerold, W.T. 1987. Environmental and Petroleum Resource Conflicts: *A Simulation Model to Determine the Benefits of Petroleum Production in the Arctic National Wildlife Refuge, Alaska*. Materials and Society II(3).

Goerold, W.T. 1988. *A Simulation Model to Determine the Probability of Finding Economically Producible Petroleum in the Arctic National Wildlife Refuge, Alaska*, Proceedings Tenth Annual North American Conference. International Association for Energy Economics. Houston TX.

Grecco, M.G. April 1987. "Deepwater Development Economics". Offshore Technology Conference.

Griffin, James M., and Moroney, John R., *Texas Severance Tax Model - The Economic Impact of Severance Taxes: Results from an Econometric Model of the Texas Oil and Gas Industry*, 1985. Report to the Texas Mid Continent Oil and Gas Association.

Haines, Leslie. July 1996. "Going Deep: Startling New Technologies and High Flow Rates Make the Deepwater Gulf of Mexico a World Class Frontier Play - and Our Last Best Hope", Oil and Gas Investor.

Hansen, J.J. and Kornbrath, R.W. 1986. *Resource Appraisal Simulation for Petroleum in the Arctic National Wildlife Refuge, Alaska*. State of Alaska, Department of Natural Resources, Division of Geological and Geophysical Surveys, Professional Report 90.

Harkrider, John D., Middlebrook, Mike L., Aud, William W., Marrer, Kenneth D., Teer, George A.: "Advanced Stimulation Technology: Success in the Anadarko Basin", GRI Gas Tips, Gas Research Institute, Spring, 1996, p.24-29.

Helfat, Constance E. September 1989. *Investment in Offshore Oil by Diversified Petroleum Companies*, Journal of Industrial Economics, Volume XXXVIII.

Hendricks, K., Novales, A. 1987. *Estimation of Dynamic Investment Functions in Oil Exploration*, Draft Manuscript.

Herron, E. Hunter. June 1982. *Unconventional-Gas Production Model*, Final Report prepared for the Brookhaven National Laboratory Associated Universities, Inc. by Gruy Federal Inc.

Huntington, H.G., Schuler, Glen E., et al., "North American Natural Gas Markets," *Energy Modeling Forum Stanford University*, February 1989.

Huntington, H.G., Schuler, Glen E., et al., "North American Natural Gas Markets: Selected Technical Studies," *Energy Modeling Forum Stanford University*, April 1989.

Huntington, H.G., Lyon, Thomas P., "Responses To Modeler Questionnaires, EMF 9: North American Natural Gas Markets," *Energy Modeling Forum Stanford University*, May 1987.

ICF-Lewin Energy, Inc. June 1998. "A Model for the Economic Analysis of U.S. Undiscovered Crude Oil Resources in the Lower-48 Offshore", Prepared for U.S. Department of Energy Under Contract No. DE-AC01-85FE60603.

ICF Resources Incorporated. August 1995. “*Primary Recovery Predictive Model for Total Oil Recovery Information System (TORIS)*”.

ICF Resources Incorporated. January 1997. “*Model Development for the Gas Systems Analysis Model: Draft Topical Report*”, Prepared for Federal Energy Technology Center, U.S. Department of Energy, Task 4, DE-AC21-92MC28138.

ICF Resources Incorporated. January 1997. “*Internal Survey of Deepwater Offshore Gulf of Mexico Projects Slated for Development, Based on Data Gathered from Various Industry Sources*”.

ICF Resources Incorporated. July 1990. “*Update and Analysis of Offshore Oil and Gas Exploration, Development, Production and Transportation Costs*”, Submitted to U.S. Minerals Management Service Under Contract No. 14-12-0001-30424.

ICF Resources Incorporated. June 1994. “*Update of the Regional Cost Functions for the TORIS Predictive Models*”, Prepared for BDM-Oklahoma, Inc. Under Contract No. DE-AC22-94PC91008.

International Petroleum Encyclopedia, PennWell Publishing Co., Tulsa, OK, 1989.

Johnson, D. 1985. “*Comparison of Alternatives for Deepwater Development in the Gulf of Mexico*”, SPE Paper 13779 presented at the Hydrocarbon Economics and Evaluation Symposium, Dallas, Texas, March 14-15.

Johnson, Ronald C., Finn, Thomas M., Crovelli, Robert A., and Balay, Richard H.: “An Assessment of In-Place Gas Resources in Low-Permeability Upper Cretaceous and Lower Tertiary Sandstone Reservoirs, Wind River Basin, Wyoming”, US Geological Survey Open-File Report 96-264, US Geological Survey, 1996.

Kalter, R.J., Tyner, W.E., and Hughes, D.W. 1975. *Alternative Energy Leasing Strategies and Schedules for the Outer Continental Shelf*, Cornell University, Department of Agricultural Economics, A.E.RES. 75-33, Ithaca, N.Y.

Kaufman, G.M., and Barouch, E. 1978. "The Interface Between Geostatistical Modeling of Oil and Gas Discovery and Economics," *Mathematical Geology*, 10(5).

Kaufman, G.M., Runggaldier, W., and Livne, Z. 1981. "Predicting the Time Rate of Supply from a Petroleum Play," in Ramsey, J., ed., *The Economics of Exploration for Energy Resources*, JAI Press, Greenwich.

Khazzoom, D.J. "The FPC Staff's Econometric Model of Natural Gas Supply in the United States," *The Bell Journal of Economics and Managements Science*, Vol. 2, No. 1, pages 51-93.

Khodaverdian, Mohamad, McLennan, John, Palmer, Ian, Vaziri, Hans: “Coalbed Cavity Completion Analysis Suggests Improvements”, GRI Gas Tips, Gas Research Institute, Winter, 1995/1996, p.22-29.

Kibbee, Stephen. June 1996. “*TLP Technology: SeaStar Minimal Platform For Small Deepwater Reserves*”, Atlantia Corporation, Oil and Gas Journal.

Kuuskraa, Vello A., Boyer, Charles M. III: “Economic and Parametric Analysis of Coalbed Methane”, Hydrocarbons from Coal — AAPG Studies in Geology number 38, 1993, p.373-394.

Le Blanc, Leonard. December 1995. "FORECAST'96: Operators Moving Into Era of Just-In-Time Production", Oil and Gas Journal.

Lerch, Chris, et al. February 1997. "Ram-Powell Partners See Big Picture With Integrated Modeling", The American Oil and Gas Reporter, Shell Offshore.

LNG Digest, Volume 15, Number 11, "News Briefs," Energy Research Associates, New York, November 1989.

Lore, Gary L., et al. August 1996. "Summary of the 1995 Assessment of the Conventionally Recoverable Hydrocarbon Resources of the Gulf of Mexico and Atlantic Outer Continental Shelf: As of January 1, 1995", U.S. Minerals Management Service, New Orleans.

Luneau, Barbara: "Accelerating Technology Development in the Greater Green River Basin", GRI Gas Tips, Gas Research Institute, Fall, 1995, p.4-10.

MacAvoy, P.W. and Pindyck, R.S. "Alternative Regulatory Policies for Dealing with the Natural Gas Shortage," *The Bell Journal of Economics and Management Science*, Vol. 4, No. 2, pages 454-498.

MacDonald, John J. and Smith, Robert S. February 1997. "Offshore Topsides: Decision Trees Aid Production Facility Design", Oil and Gas Journal.

Mansvelt Beck, F.W., and Wiig, K.M. 1977. *The Economics of Offshore Oil and Gas Supplies*, Lexington Books, Lexington, Mass.

Megill, R.E. 1988. *Exploration Economics*.

Melancon, J. Michael, et al. January 1997. "Gulf of Mexico Outer Continental Shelf Daily Oil and Gas Production Rate Projections from 1996 through 2000", OCS Report MMS 97-0006, Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Melancon, J. Michael, et al. October 1990. "Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1989", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Melancon, J. Michael, et al. October 1991. "Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1990", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Melancon, J. Michael, et al. September 1992. "Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1991", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Melancon, J. Michael, et al. August 1993. "Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1992", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Melancon, J. Michael, et al. August 1994. "Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1993", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Melancon, J. Michael, et al. August 1995. "*Outer Continental Shelf: Estimated Oil and Gas Reserves, Gulf of Mexico, December 31, 1994*", Resource Evaluation Office, U.S. Minerals Management Service, New Orleans.

Miers, John H. January 20, 1997. "*The Gulf of Mexico's Revival: Technology Gives Gulf Prospects World-Class Investment Appeal*", Amoco Exploration & Production Co., Houston, Oil and Gas Journal.

Moritis, Guntis. April 20, 1992. "EOR Increases 24% Worldwide; Claims 10% of U.S. production" [Biennial EOR Production Report], *Oil and Gas Journal*, page 51 and following.

Moritis, Guntis. June 29, 1992. "More Enhanced Oil Recovery Project Information Obtained," *Oil and Gas Journal*, page 70 and following pages.

Murphy, Frederic H. and William Trapmann. 1982. An Evaluation of the Alaskan Hydrocarbon Supply Model," *Oil and Gas Supply Modeling*, published by the National Bureau of Standards. Washington, DC.

National Energy Board, *Canadian Energy: Supply and Demand 1987-2005*, Minister of Supply and Services Canada, Ottawa, Canada, 1988.

National Energy Board, *1989 Annual Report*, Minister of Supply and Services Canada, Ottawa, Canada, 1989.

National Petroleum Council. 1981. *U.S. Arctic Oil and Gas*. Energy and Environmental Analysis, Inc. Arlington, VA.

National Petroleum Council. December 1980. *Unconventional Gas Sources*, Vols 1-4.

National Petroleum Council. 1984. *Enhanced Oil Recovery*, Washington, D.C.

National Petroleum Council. 1991. *Field Development Assumptions and Costs in the Hydrocarbon Supply Model*, Energy and Environmental Analysis, Inc., Arlington, VA.

National Petroleum Council. December 1999. *Natural Gas: Meeting the Challenges of the Nation's Growing Natural Gas Demand*, Washington, DC.

National Petroleum Council. 1992. *The Potential for Natural Gas in the United States*, Washington, DC.

National Research Council. 1992. *The National Energy Modeling System*, Committee on the National Energy Modeling System, Washington, DC.

Natural Gas Week, "DOE OKs Gas Import/Export with Mexico," June 12, 1989

Nesbitt, D., and Phillips, R. September 1980. *Financial Statements and Producer Behavior in Generalized Equilibrium Models Such as LEAP*, Decision Focus Incorporated Report.

Nesbitt, D.M. 1988. *Methodology of the GRI North American Regional Gas Supply-Demand Model, Appendix A*, Decision Focus Incorporated, Los Altos, CA.

Nesbitt, D.M. 1991. *Insights from the North American Regional Gas (NARG) Supply-Demand Model*, Presentation to the Imports and Alaska Working Group of the National Petroleum Council Natural Gas Study.

Newendorp, Paul, D. 1975. *Decision Analysis for Petroleum Exploration*, The Petroleum Publishing Company, Tulsa, OK.

Offshore Data Services, Inc. June 1997. "Database of Wells Drilled in the Deepwater Gulf of Mexico", Houston, Texas .

Offshore Special Report. May 1997. "How Offshore Drilling Units Evolved", Offshore Magazine, Pennwell Publications.

The Oil Daily Co., "Spot Prices on Interstate Pipeline Systems", Natural Gas Week, 1996-1997.

Pautz, James F., et al. 1992. *Enhanced Oil Recovery Projects Data Base*, NIPER-583, National Institute for Petroleum and Energy Research, Bartlesville, Oklahoma.

Petroleum Economist, Volume LVI, Number 12, "Gas Set for 1990s Growth," Euromoney Publications pic, London, UK, December 1989.

Petroleum Economist, Volume LVI, Number 12, "Liquefied Natural Gas: Continued Market Expansion," Euromoney Publications pic, London, UK, December 1989.

Petroleum Information/Dwights LLC: "Production Data for the Rocky Mountain, Gulf Coast/Offshore, and Texas/Midcontinent Areas", Petroleum Information/Dwights LLC (CD-ROM), March 1997.

Petroleum Intelligence Weekly, Special Supplement Issue, "World LNG Trade Entering New Growth Phase," Petroleum & Energy Intelligence Weekly, Inc., November 13, 1989.

Platt's Oilgram News, Volume 68, Number 54, "MARAD Rebuff's Cabot's \$45-Million Attempt to Buy 3 LNG Tankers at Center of Dispute," McGraw-Hill, New York, March 19, 1990.

Platt's Oilgram News, Volume 68, Number 201, "LNG Ship Deal Jeopardized by New Lawsuit," McGraw-Hill, New York, October 16, 1990.

Potential Gas Agency: "Potential Supply of Natural Gas in the United States - Report of the Potential Gas Committee (December 31, 1996)", Potential Gas Agency, March 1997.

Potential Gas Committee. 1988a. *Potential Supply of Natural Gas in the United States*, Potential Gas Agency, Colorado School of Mines, Golden, Colorado.

Powell, Stephen G. September 1990. *Arctic National Wildlife Refuge - How Much Oil Can We Expect?*. Resources Policy.

Powell, Stephen G. 1990. *A Risk Analysis of Oil Development in the Arctic National Wildlife Refuge*. The Energy Journal, Volume 12, Number 3.

Prato, A.A., and Miller, R.R. 1981. "Evaluating the Energy Production Potential of the United States Outer Continental Shelf," *Land Economics*, Vol. 57, No. 1, pages 77-90.

Riva, Joseph P., Jr. November 19, 1992. *The Domestic Oil Status and a Projection of Future Production*, CRS Report for Congress, 92-826 SPR, Congressional Research Service, Washington, D.C.

Riva, Joseph P., Jr. October 5, 1992. *Domestic Oil Production*, CRS Issue Brief, Order Code IB87068, Congressional Research Service, Washington, D.C.

Rowse, J. "Allocation of Canadian Natural Gas to Domestic and Export Markets," *Canadian Journal of Economics*, 19 (August 1986), pp. 417-442.

Rowse, J. "Canadian Natural Gas Exports, Domestic Gas Prices and Future Gas Supply Costs", *The Energy Journal*, 8 (April 1987), pp. 43-62.

Roy, K.J. 1975. "Hydrocarbon Assessment Using Subjective Probability and Monte Carlo Methods," in *First IIASA Conference on Methods and Models for Assessing Energy Resources Conference*, Honolulu.

Roy, K.J., Procter, R.M., and McCrossam, R.G. 1975. "Hydrocarbon Assessment Using Subjective Probability," in Davis, J.C., Doveton, J.H., and Harbaugh, J.W., conveners, *Probability Methods in Oil Exploration: American Association of Petroleum Geologists Research Symposium Notes*, Stanford, University, pages 56-60.

Samuelson, P., "Spatial Price Equilibrium and Linear Programming," *American Economic Review*, 42, 1952.

Sproule Associates Ltd., "The Future Natural Gas Supply Capability Of The Western Canada Sedimentary Basin", *Report to Transcanada Pipelines Ltd.*, January 1990.

Stermole, Franklin J. and Stermole, John M. 1993. "*Economic Evaluation and Investment Decision Methods*", Eighth Edition, Investment Evaluations Corporation, Golden, Colorado.

Trapmann, William. 1991. "Relating Natural Gas Resource Estimates to the Outlook for the Market," paper presented at the 14th Annual International Conference of the International Association for Energy Economists.

Tyler, Roger, Kaiser, W.R., Scott, A.R., Hamilton, D.S., Ambrose, W.A.: "Geologic and Hydrologic Assessment of Natural Gas from Coal: Greater Green River, Piceance, Powder River, and Raton Basins", Bureau of Economic Geology - University of Texas and Gas Research Institute, Contract number 5091-214-2261, 1995.

U.S. Congress. Office of Technology Assessment. 1989. *Oil Production in the Arctic National Wildlife Refuge: The Technology and the Alaskan Oil Context*. OTA-E-394. Washington, D.C.

U.S. Department of Energy. July 1994. "*Costs and Indices for Domestic Oil and Gas Field Equipment and Production Operations: 1990 through 1993*", Technical Report DOE/EIA-TR-0568, Energy Information Administration, Washington D.C.

U.S. Department of Energy. January 1996. "*Documentation of the Oil and Gas Supply Module (OGSM)*", DOE/EIA-M063(96), Energy Information Administration.

U.S. Department of Energy: "GASIS Gas Information System - A National Database of Geological, Engineering, Production and Ultimate Recovery Data for U.S. Oil and Natural Gas Reservoirs", Department of Energy, GASIS Release 1 CD-ROM, March 1997.

U.S. Department of Energy. May 1997. "*The National Energy Modeling System: An Overview*", DOE/EIA-0581, Energy Information Administration.

U.S. Department of Energy. 1978. *Midterm Oil and Gas Supply Modeling System Methodology Description*, DOE/EIA-0103/17 Energy Information Administration, Washington, DC.

U.S. Department of Energy. December 1982. *Outer Continental Shelf (OCS) Oil and Gas Supply Model, Volume 1, Model Summary and Methodology Description*, DOE/EIA-0372/1 Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1982. *Outer Continental Shelf (OCS) Oil and Gas Supply Model, Volume 1, Model Summary and Methodology Description*, DOE/EIA-0372/1, Energy Information Administration, Washington, DC.

U.S. Department of Energy, *The Petroleum Resources of Mexico*, DOE/EIA-0423, Energy Information Administration, Washington, DC, 1983.

U.S. Department of Energy. 1991. *Recommended Design for the National Energy Modeling System*, Energy Information Administration, NEMS Project Office, Washington, DC.

U.S. Department of Energy. 1986. *An Economic Analysis of Natural Gas Resources and Supply*, DOE/EIA-0481, Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1987. *Potential Oil Production from the Coastal Plain of the Arctic National Wildlife Refuge*. SR/RNGD/87-01. Energy Information Administration. Washington, DC.

U.S. Department of Energy, 1988, *An Assessment of the Natural Gas Resource Base of the United States*, DOE/W/31109-H1, Office of Policy, Planning & Analysis, Washington, DC.

U.S. Department of Energy, *International Energy Annual 1988*, DOE/EIA-0219(88), Energy Information Administration, Washington, DC, 1988a.

U.S. Department of Energy, *Natural Gas Annual 1988*, DOE/EIA-0131(88), Energy Information Administration, Washington, DC, 1988a.

U.S. Department of Energy, *Assessment of Costs and Benefits of Flexible and Alternative Fuel Use in the U.S. Transportation Sector; Technical Report Three: Methanol Production and Transportation Costs*, DOE/PE-0093 Office of Policy Planning and Analysis, November 1989.

U.S. Department Of Energy. 1989. *Abandonment Rates of the Known Domestic Oil Resource*, DOE/BC--89/6/SP, Bartlesville Project Office, Bartlesville, Oklahoma.

U.S. Department of Energy. 1989. *An Examination of Domestic Natural Gas Resource Estimates*, SR/RNGD/89-01, Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1989. *Federal Oil Research: A Strategy for Maximizing the Producibility of Known U.S. Oil*, DOE/FE-0139, Office of Fossil Energy, Washington, D.C.

U.S. Department of Energy. 1989a. *Annual Energy Review*, DOE/EIA-0384(89), Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1990. *The Domestic Oil and Gas Recoverable Resource Base: Supporting Analysis for the National Energy Strategy*, SR/NES/90-05, Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1990. *United States Crude Oil, Natural Gas, and Natural Gas Liquids Reserves*. DOE/EIA-0216(90). Energy Information Administration. Washington, DC.

U.S. Department of Energy, *Development Costs of Undeveloped Non-associated Gas Reserves in Selected Countries*, Office of Policy Planning and Analysis, 1990.

U.S. Department of Energy, *Quarterly Sales and Prices Report*, Office of Fossil Energy, Office of Fuels Programs, various issues, 1990.

U.S. Department of Energy. 1990a. *United States Crude Oil, Natural Gas, and Natural Gas Liquids Reserves*, DOE/EIA-0216(90), Energy Information Administration, Washington, DC.

U.S. Department of Energy. May 1991. *Intermediate Future Forecasting System: Executive Summary*, DOE/EIA-M023(91) Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1991. *Alaska Oil and Gas Energy Wealth or Vanishing Opportunity?*. DOE/ID/01570-H1. Office of Fossil Energy. Washington, DC.

U.S. Department of Energy. 1991. *The Outlook for Natural Gas Imports: Supporting Analysis for the National Energy Strategy*, SR/NES/90-06, Energy Information Administration, Washington, DC.

U.S. Department of Energy. April 1992. *Model Methodology and Data Description of the Production of Onshore Lower 48 Oil and Gas Model*, Energy Information Administration, Office of Oil and Gas, Washington, DC.

U.S. Department of Energy. 2003. *Documentation of the Oil and Gas Supply Module (OGSM)*, DOE/EIA-M063, Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1994. *Documentation of the Oil and Gas Supply Module (OGSM), Appendix: Model Developers Report*, Energy Information Administration, Washington, DC.

U.S. Department of Energy. 1992. *Component Design Report - Basic Framework & Onshore Lower 48 Conventional Oil and Gas Supply*. Energy Information Administration. Washington, DC.

U.S. Department of Energy. 1992. *Model Methodology and Data Description of the Production of Onshore Lower 48 Oil and Gas Model*, Draft Report, Energy Information Administration, Washington, DC.

U.S. Department of the Interior, 1981, *Estimates of Undiscovered Recoverable Conventional Resources of Oil and Gas in the United States*, United States Geological Survey Circular 860, United States Geological Survey, Reston, Virginia.

U.S. Department of the Interior, 1987, *Economics of Oil and Gas Production from ANWR for the Determination of Minimum Economic Field Size*, PT-87-015-3120-985, Bureau of Land Management, Division of Mineral Resources, Alaska State Office.

U.S. Department of the Interior, 1988, *National Assessment of Undiscovered Conventional Oil and Gas Resources*, USGS-MMS Working Paper, Open File Report 88-373, United States Geological Survey and Minerals Management Service, Reston, Virginia.

U.S. Department of the Interior, 1989, *Estimates of Undiscovered Conventional Oil and Gas Resources in the United States -- A Part of the Nation's Energy Endowment*, United States Geological Survey and Minerals Management Service, Denver, Colorado.

U.S. Department of the Interior, *Federal Offshore Statistics 1990*, Minerals Management Service (MMS).

U.S. Department of the Interior, *Estimates of Undiscovered, Economically Recoverable Oil & Gas Resources: for the Outer Continental Shelf, Revised as of January 1995* Minerals Management Service.

U.S. Department of the Interior, *Estimates of Undiscovered, Economically Recoverable Oil & Gas Resources: for the Outer Continental Shelf, Revised as of January 1999* Minerals Management Service.

U.S. Minerals Management Service. April 1996. "Deepwater Royalty Relief for New Leases: Interim Rule", 30 CFR Part 260, RIN 1010-AC14, Offshore Minerals Analysis Division.

U.S. Minerals Management Service World Wide Web Page. February 1997. "Database of 899 Producing Oil and Gas Fields in the Gulf of Mexico Outer Continental Shelf".

Van Meter, John E. May 1995. "Production Technology: Deciding When To Use A MOPU For Field Development", Paragon Engineering Services, Oil and Gas Journal.

Van Poolen, H.K. and Associates, Inc. 1978. *Documentation of Input Variables: Northern Alaska Hydrocarbon Model*.

Walls, M.A. 1989. *Forecasting Oil Market Behavior: Rational Expectations Analysis of Price Shocks*, Resources for the Future Discussion Paper EM87-03. Washington.

Walls, Margaret A. October 1990. *Analyzing the Determinants of Offshore Oil and Gas Supply: A Factual and Methodological Assessment*, Final Report Prepared for the Reserves and Natural Gas Division of the Energy Information Administration under ORNL Subcontract No. 90X-SE635V.

Walls, Margaret A. 1990. *A Survey of Oil and Gas Supply Models*, Draft Report, Resources for the Future, Washington, DC.

Wharton Econometric Forecasting Associates, July 1988, *Canadian Energy Analysis Quarterly*, The WEFA Group, Toronto, Canada .

Wheatley, Richard. January 20, 1997. "Deepwater, Subsalt Prospects Open New Era for Gulf of Mexico Action", Oil & Gas Journal.

White, D.A., and Gehman, H.M. 1979. "Methods of Estimating Oil and Gas Resources," *The American Association of Petroleum Geologists Bulletin*, Vol. 63, pages 2183-2192.

White, D.A. 1980. "Assessing Oil and Gas Plays in Facies-Cycle Wedges," *The American Association of Petroleum Geologists Bulletin*, Vol 64, pages 1158-1178.

White, D.A. 1981. "A Play Approach to Hydrocarbon Resource Assessment and Evaluation," in Ramsey, J., ed., *The Economics of Exploration for Energy Resources*, JAI Press, Greenwich.

Williams, M.R. and Atkins, P.A. April 1987. "*Simple Subsea Trees for Shallow Water: An Economical Alternative*", Offshore Technology Conference.

Young, J.S. and Hauser, W.S. 1986. *Economics of Oil and Gas for ANWR for the Determination of Minimum Economic Field Size*. Bureau of Land Management. Division of Mineral Resource. Alaska State Office.

Appendix C. Model Abstract

1. Model Name
Oil and Gas Supply Module
2. Acronym
OGSM
3. Description
OGSM projects the following aspects of the crude oil and natural gas supply industry:
 - production
 - reserves
 - drilling activity
 - natural gas imports and exports
4. Purpose
OGSM is used by the Oil and Gas Division in the Office of Integrated Analysis and Forecasting as an analytic aid to support preparation of projections of reserves and production of crude oil and natural gas at the regional and national level. The annual projections and associated analyses appear in the *Annual Energy Outlook* (DOE/EIA-0383) of the Energy Information Administration. The projections also are provided as a service to other branches of the U.S. Department of Energy, the Federal Government, and non-Federal public and private institutions concerned with the crude oil and natural gas industry.
5. Date of Last Update
2003
6. Part of Another Model
National Energy Modeling System (NEMS)
7. Model Interface References
Coal Module
Electricity Module
Industrial Module
International Module
Natural Gas Transportation and Distribution Model (NGTDM)
Macroeconomic Module
Petroleum Market Module (PMM)
8. Official Model Representative
 - Office: Integrating Analysis and Forecasting
 - Division: Oil and Gas Analysis
 - Model Contact: Ted McCallister
 - Telephone: (202) 586-4820
9. Documentation Reference
U.S. Department of Energy. 2003. *Documentation of the Oil and Gas Supply Module (OGSM)*, DOE/EIA-M063, Energy Information Administration, Washington, DC.
10. Archive Media and Installation Manual
NEMS2004

11. Energy Systems Described

The OGSM forecasts oil and natural gas production activities for six onshore and three offshore regions as well as three Alaskan regions. Exploratory and developmental drilling are treated separately, with exploratory drilling further differentiated as new field wildcats or other exploratory wells. New field wildcats are those wells drilled for a new field on a structure or in an environment never before productive. Other exploratory wells are those drilled in already productive locations. Development wells are primarily within or near proven areas and can result in extensions or revisions. Exploration yields new additions to the stock of reserves and development determines the rate of production from the stock of known reserves.

The OGSM also projects natural gas trade via pipeline with Canada and Mexico, as well as liquefied natural gas (LNG) trade. U.S. natural gas trade with Canada is represented by seven entry/exit points and trade with Mexico by three entry/exit points. The four currently existing LNG receiving terminals are represented as well as possible new construction of LNG regasification facilities in each coastal region.

12. Coverage

- Geographic: Six Lower 48 onshore supply regions, three Lower 48 offshore regions, and three Alaskan regions.
- Time Units/Frequency: Annually 1990 through 2025
- Product(s): Crude oil and natural gas
- Economic Sector(s): Oil and gas field production activities and foreign natural gas trade

13. Model Features

- Model Structure: Modular, containing six major components
 - Lower 48 Onshore Supply Submodule
 - Unconventional Gas Recovery Supply Submodule
 - Offshore Oil and Gas Supply Submodule
 - Foreign Natural Gas Supply Submodule
 - Alaska Oil and Gas Supply Submodule
- Modeling Technique: The OGSM is a hybrid econometric/discovery process model. Drilling activities in the United States are determined by the discounted cash flow that measures the expected present value profits for the proposed effort and other key economic variables. LNG imports are projected on the basis of unit supply costs for gas delivered into the Lower 48 pipeline network.
- Special Features: Can run stand-alone or within the NEMS. Integrated NEMS runs employ short term natural gas supply functions for efficient market equilibration.

14. Non-DOE Input Data

- Alaskan Oil and Gas Field Size Distributions - U.S. Geological Survey
- Alaska Facility Cost By Oil Field Size - U.S. Geological Survey
- Alaska Operating cost - U.S. Geological Survey
- Basin Differential Prices - Natural Gas Week, Washington, DC
- State Corporate Tax Rate - Commerce Clearing House, Inc. *State Tax Guide*
- State Severance Tax Rate - Commerce Clearing House, Inc. *State Tax Guide*

- Federal Corporate Tax Rate, Royalty Rate - U.S. Tax Code
- Onshore Drilling Costs - (1.) American Petroleum Institute. *Joint Association Survey of Drilling Costs (1970-2002)*, Washington, D.C.; (2.) Additional unconventional gas recovery drilling and operating cost data from operating companies
- Shallow Offshore Drilling Costs - American Petroleum Institute. *Joint Association Survey of Drilling Costs (1970-2002)*, Washington, D.C.
- Shallow Offshore Lease Equipment and Operating Costs - Department of Interior. Minerals Management Service (Correspondence from Gulf of Mexico and Pacific OCS regional offices)
- Shallow Offshore Wells Drilled per Project - Department of Interior. Minerals Management Service (Correspondence from Gulf of Mexico and Pacific OCS regional offices)
- Shallow and Deep Offshore Technically Recoverable Oil and Gas Undiscovered Resources - Department of Interior. Minerals Management Service (Correspondence from Gulf of Mexico and Pacific OCS regional offices)
- Offshore Exploration, Drilling, Platform, and Production Costs - Department of Interior. Minerals Management Service (Correspondence from Gulf of Mexico and Pacific OCS regional offices)
- Canadian Royalty Rate, Corporate Tax Rate, Provincial Corporate Tax Rate- Energy Mines and Resources Canada. *Petroleum Fiscal Systems in Canada*, (Third Edition - 1988)
- Canadian Wells drilled - Canadian Petroleum Association. *Statistical Handbook*, (1976-1993)
- Canadian Lease Equipment and Operating Costs - Sproule Associates Limited. *The Future Natural Gas Supply Capability of the Western Canadian Sedimentary Basin* (Report Prepared for Transcanada Pipelines Limited, January 1990)
- Canadian Recoverable Resource Base - National Energy Board. *Canadian Energy Supply and Demand 1990 - 2010*, June 1991
- Canadian Reserves - Canadian Petroleum Association. *Statistical Handbook*, (1976-1993)
- Unconventional Gas Resource Data - (1) USGS *1995 National Assessment of United States Oil and Natural Gas Resources*; (2) Additional unconventional gas data from operating companies
- Unconventional Gas Technology Parameters - (1) Advanced Resources International Internal studies; (2) Data gathered from operating companies

15. DOE Input Data

- Onshore Lease Equipment Cost - Energy Information Administration. *Costs and Indexes for Domestic Oil and Gas Field Equipment and Production Operations (1980 - 2002)*, DOE/EIA-0815(80-02)
- Onshore Operating Cost - Energy Information Administration. *Costs and Indexes for Domestic Oil and Gas Field Equipment and Production Operations (1980 - 2002)*, DOE/EIA-0815(80-02)

- Emissions Factors - Energy Information Administration
- Oil and Gas Well Initial Flow Rates - Energy Information Administration, Office of Oil and Gas
- Wells Drilled - Energy Information Administration, Office of Oil and Gas
- Expected Recovery of Oil and Gas Per Well - Energy Information Administration, Office of Oil and Gas
- Oil and Gas Reserves - Energy Information Administration. *U.S. Crude Oil, Natural Gas, and Natural Gas Liquids Reserves*, (1977-2001), DOE/EIA-0216(77-01)

16. Computing Environment

- Hardware Used: PC
- Operating System: Windows 95/Windows NT
- Language/Software Used: FORTRAN
- Memory Requirement: Unknown
- Storage Requirement: 992 bytes for input data storage; 180,864 bytes for output storage; 1280 bytes for code storage; and 5736 bytes for compiled code storage
- Estimated Run Time: 9.8 seconds

17. Reviews conducted

Independent Expert Review of the Annual Energy Outlook 2003 - Cutler J. Cleveland and Robert K. Kaufmann of the Center for Energy and Environmental Studies, Boston University; and Harry Vidas of Energy and Environmental Analysis, Inc., June-July 2003
 Independent Expert Reviews, Model Quality Audit; Unconventional Gas Recovery Supply Submodule - Presentations to Mara Dean (DOE/FE - Pittsburgh) and Ray Boswell (DOE/FE - Morgantown), April 1998 and DOE/FE (Washington, DC)

18. Status of Evaluation Efforts

Not applicable

19. Bibliography

See Appendix B of this document.

Appendix D. Parameter Estimation

The major portion of the lower 48 oil and gas supply component of the OGSM consists of a system of equations that are used to forecast exploratory and developmental wells drilled. The equations, the estimation techniques, and the statistical results are documented below. Documentation is also provided for the estimation of the drilling, lease equipment, and operating cost equations as well as the associated-dissolved gas equations and the Canadian oil and gas wells equations. Finally, the appendix documents the estimation of oil and gas supply price elasticities for possible use in short run supply functions. The econometric software packages, SAS and TSP, were used for the estimations.

Lower 48 Estimated Wells Equations

The equations for onshore total and successful wells were estimated using time series data for the onshore Lower 48 over the time period 1970 through 1998. The equations were estimated with correction for first order serial correlation using version 4.4 of TSP.

$$\text{LESTWELLS}_t = b_0 + b_1 * \text{LPOIL}_t + b_2 * \text{LPGAS}_t + \rho * \text{LESTWELLS}_{t-1} - \rho * (b_0 + b_1 * \text{LPOIL}_{t-1} + b_2 * \text{LPGAS}_{t-1}) \quad (\text{D-1})$$

Dependent variable: lnESTWELLS_t
 Number of observations: 29

(Statistics based on transformed data)	(Statistics based on original data)
Mean of dep. var. = .773259	Mean of dep. var. = 10.5283
Std. dev. of dep. var. = .571719	Std. dev. of dep. var. = .458516
Sum of squared residuals = .327719	Sum of squared residuals = .421251
Variance of residuals = .012605	Variance of residuals = .016202
Std. error of regression = .112270	Std. error of regression = .127287
R-squared = .967485	R-squared = .930147
Adjusted R-squared = .964984	Adjusted R-squared = .924773
Durbin-Watson = 2.12057	Durbin-Watson = 1.92563
ρ (autocorrelation coef.) = .935763	
Standard error of ρ = .056575	
t-statistic for ρ = 16.5402	
Log likelihood = 22.8104	

Parameter	Estimate	Standard Error	t-statistic	P-value
b0	9.24194	.345360	26.7603	[.000]
b1	.384673	.150670	2.55308	[.011]
b2	.364478	.104591	3.48478	[.000]

$$\text{LESTSUCWELLS}_t = b_0 + b_1 * \text{LPOIL}_t + b_2 * \text{LPGAS}_t + \rho * \text{LESTSUCWELLS}_{t-1} - \rho * (b_0 + b_1 * \text{LPOIL}_{t-1} + b_2 * \text{LPGAS}_{t-1})$$

(D-2)

Dependent variable: lnESTSUCWELLS_t
 Number of observations: 29

<p>(Statistics based on transformed data)</p> <p>Mean of dep. var. = 1.26568</p> <p>Std. dev. of dep. var. = .645064</p> <p>Sum of squared residuals = .333911</p> <p>Variance of residuals = .012843</p> <p>Std. error of regression = .113326</p> <p>R-squared = .973012</p> <p>Adjusted R-squared = .970936</p> <p>Durbin-Watson = 2.10554</p> <p>ρ (autocorrelation coef.) = .887343</p> <p>Standard error of ρ = .077178</p> <p>t-statistic for ρ = 11.4974</p> <p>Log likelihood = 22.8072</p>	<p>(Statistics based on original data)</p> <p>Mean of dep. var. = 10.1632</p> <p>Std. dev. of dep. var. = .450947</p> <p>Sum of squared residuals = .373656</p> <p>Variance of residuals = .014371</p> <p>Std. error of regression = .119881</p> <p>R-squared = .935106</p> <p>Adjusted R-squared = .930114</p> <p>Durbin-Watson = 2.02018</p>
--	--

Parameter	Estimate	Standard Error	t-statistic	P-value
b0	8.79205	.307779	28.5661	[.000]
b1	.401503	.144735	2.77406	[.006]
b2	.389798	.106397	3.66361	[.000]

Lower 48 RIGS Equations

Onshore

$$\text{LRIGSL48}_t = b_0 + b_1 * \text{LRIGSL48}_{t-1} + b_2 * \text{LREVRIG}_{t-1} + \rho * \text{LRIGSL48}_{t-2} - \rho * (b_0 + b_1 * \text{LRIGSL48}_{t-2} + b_2 * \text{LREVRIG}_{t-3}) \quad (\text{D-3})$$

Equation Variable/Parameter	Output Variable/Parameter
LRIGSL48	LN RIGS
b0	C
b1	LN RIGS(-1)
b2	LN REVRIG(-1)
ρ	RHO

FIRST-ORDER SERIAL CORRELATION OF THE ERROR

MAXIMUM LIKELIHOOD ITERATIVE TECHNIQUE

NOTE: Lagged dependent variable(s) present

MAXIMUM LIKELIHOOD ESTIMATION IS NOT
 IMPLEMENTED FOR LAGGED DEPENDENT VARIABLES
 DUE TO TREATMENT OF THE FIRST OBSERVATION.
 METHOD OF ESTIMATION IS CHANGED TO
 COCHRANE-ORCUTT ITERATIVE TECHNIQUE

CONVERGENCE ACHIEVED AFTER 6 ITERATIONS

Dependent variable: LNRIGS
 Current sample: 3 to 26
 Number of observations: 24

(Statistics based on transformed data)
 Mean of dep. var. = 4.38969
 Std. dev. of dep. var. = .234933
 Sum of squared residuals = .058026
 Variance of residuals = .276313E-02
 Std. error of regression = .052566
 R-squared = .954291
 Adjusted R-squared = .949937
 Durbin-Watson = 1.62731
 Rho (autocorrelation coef.) = .439691
 Standard error of rho = .232287
 t-statistic for rho = 1.89288
 Log likelihood = 38.2445

(Statistics based on original data)
 Mean of dep. var. = 7.83784
 Std. dev. of dep. var. = .389324
 Sum of squared residuals = .058026
 Variance of residuals = .276313E-02
 Std. error of regression = .052566
 R-squared = .983357
 Adjusted R-squared = .981772
 Durbin-Watson = 1.62731

Variable	Estimated Coefficient	Standard Error	t-statistic	P-value
C	-3.37088	.762161	-4.42280	[.000]
LNRIGS(-1)	.803012	.053301	15.0655	[.000]
LNREVRIG(-1)	.312270	.051418	6.07313	[.000]
RHO	.439691	.232287	1.89288	[.058]

Drilling Cost Equations

Drilling costs were hypothesized to be a function of drilling, depth, and a time trend that proxies for the cumulative effect of technological advances on costs. The equations were estimated in log-linear form using Three Stage Least Squares (3SLS) technique. The forms of the equations are:

Onshore Regions

$$\begin{aligned} \text{LDRILLCOST}_{r,k,t} = & \ln(\delta 0)_{r,k} + \ln(\delta 1)_{r,k} + \delta 3 * \text{LESTWELLS}_t + \delta 4 * \text{LRIGSL48}_t + \delta 5 * \text{TIME}_t + \\ & \rho_k * \text{LDRILLCOST}_{r,k,t-1} - \rho_k * (\ln(\delta 0)_{r,k} + \ln(\delta 1)_{r,k} + \\ & \delta 3 * \text{LESTWELLS}_{t-1} + \delta 4 * \text{LRIGSL48}_{t-1} + \delta 5 * \text{TIME}_{t-1}) \end{aligned} \quad (\text{D-4})$$

Results

Mapping of variable names from the above equation to the following SAS output.

Variable/Parameter	Successful		Dry	
	Oil	Gas	Oil	Gas
LDRILLCOST	LNOILCST	LNGASCST	LNDOIL_C	LNDGAS_C
$\ln(\delta 0)_t$	REGOIL _t	REGGAS _t	REGDOIL _t	REGDGAS _t
$\ln(\delta 1)$	OILDPTH	GASDPTH	DO_DPTH	DG_DPTH
$\delta 3$	OGD_WELL	OGD_WELL	OGD_WELL	OGD_WELL
$\delta 4$	OGD_RIGS	OGD_RIGS	OGD_RIGS	OGD_RIGS
$\delta 5$ (1977-1997)	TECH1	TECH1	TECH1	TECH1
$\delta 5$ (1998-2000)	TECH2	TECH2	TECH2	TECH2
ρ	RHO_O	RHO_G	RHO_DO	RHO_DG

THREE STAGE LEAST SQUARES
=====

EQUATIONS: OIL GAS DOIL DGAS

INSTRUMENTS: REGION1 REGION6 REGION2 REGION3 REGION4 REGION5
YEAR(-1) LNOILCST(-1) LNGASCST(-1) LNDOIL_C(-1) LNDGAS_C(-1)
LNRIGS(-1) LNWELLS(-1) OIL_DPTH(-1) GAS_DPTH(-1) DOILDPTH(-1)
DGASDPTH(-1) LNPOIL LNPGAS

CONVERGENCE ACHIEVED AFTER 7 ITERATIONS

Number of observations = 820 E'PZ*E = 367.313
Standard Errors computed from heteroscedastic-consistent matrix
(Robust-White)

Parameter	Estimate	Standard Error	t-statistic	P-value
REGOIL1	43.3811	6.68122	6.49298	[.000]

REGOIL2	43.7288	6.68380	6.54251	[.000]
REGOIL3	43.6083	6.68436	6.52393	[.000]
REGOIL4	43.5965	6.68403	6.52249	[.000]
REGOIL5	43.8860	6.68394	6.56589	[.000]
REGOIL6	44.3143	6.68132	6.63256	[.000]
OGD_RIGS	-.365150	.068521	-5.32904	[.000]
OGD_WELL	.696055	.060253	11.5522	[.000]
TECH1	-.018699	.327445E-02	-5.71071	[.000]
TECH2	-.017772	.322826E-02	-5.50528	[.000]
OILDPH	.231790E-03	.554909E-05	41.7708	[.000]
RHO_O	.741813	.014752	50.2853	[.000]
REGGAS1	43.4793	6.68130	6.50761	[.000]
REGGAS2	43.7806	6.68332	6.55073	[.000]
REGGAS3	43.6409	6.68286	6.53027	[.000]
REGGAS4	43.5936	6.68327	6.52279	[.000]
REGGAS6	43.9905	6.67932	6.58607	[.000]
REGGAS5	43.8513	6.68317	6.56145	[.000]
GASDPH	.241401E-03	.532126E-05	45.3653	[.000]
RHO_G	.718273	.016328	43.9913	[.000]
REGDOIL1	43.0952	6.68180	6.44964	[.000]
REGDOIL2	43.1928	6.68444	6.46170	[.000]
REGDOIL3	43.0319	6.68461	6.43747	[.000]
REGDOIL4	43.0583	6.68410	6.44190	[.000]
REGDOIL5	43.3859	6.68462	6.49040	[.000]
REGDOIL6	43.8253	6.68145	6.55924	[.000]
DO_DPTH	.247234E-03	.575148E-05	42.9862	[.000]
RHO_DO	.648979	.017910	36.2362	[.000]
REGDGAS1	43.1978	6.68176	6.46503	[.000]
REGDGAS2	43.2389	6.68418	6.46885	[.000]
REGDGAS3	43.0726	6.68356	6.44456	[.000]
REGDGAS4	43.0458	6.68355	6.44055	[.000]
REGDGAS5	43.3591	6.68440	6.48661	[.000]
REGDGAS6	43.3583	6.68056	6.49022	[.000]
DG_DPTH	.257674E-03	.519692E-05	49.5820	[.000]
RHO_DG	.638074	.019178	33.2714	[.000]

Standard Errors computed from quadratic form of analytic first derivatives (Gauss)

Equation: OIL
Dependent variable: LNOILCST

Mean of dep. var. = 12.6541	Std. error of regression = .159992
Std. dev. of dep. var. = 1.10148	R-squared = .979042
Sum of squared residuals = 20.9899	Durbin-Watson = 1.95003 [<.568]
Variance of residuals = .025597	

Equation: GAS
Dependent variable: LNGASCST

Mean of dep. var. = 12.7895	Std. error of regression = .179482
Std. dev. of dep. var. = 1.13764	R-squared = .975134
Sum of squared residuals = 26.4154	Durbin-Watson = 1.90601 [<.323]
Variance of residuals = .032214	

Equation: DOIL
Dependent variable: LNDOIL_C

Mean of dep. var. = 12.2531	Std. error of regression = .227375
Std. dev. of dep. var. = 1.21336	R-squared = .965533
Sum of squared residuals = 42.3936	Durbin-Watson = 1.93831 [<.501]
Variance of residuals = .051699	

Equation: DGAS
Dependent variable: LNDGAS_C

Mean of dep. var. = 12.3904	Std. error of regression = .222973
Std. dev. of dep. var. = 1.25330	R-squared = .968732
Sum of squared residuals = 40.7680	Durbin-Watson = 1.98926 [<.768]
Variance of residuals = .049717	

Onshore Lease Equipment Cost Equations

Lease equipment costs were hypothesized to be a function of total successful wells and a time trend that proxies for the cumulative effect of technological advances on costs. The form of the equation was assumed to be log-linear. The equations were estimated in log-linear form using Three Stage Least Squares (3SLS) technique. Where necessary, equations were estimated in generalized difference form to correct for first order serial correlation. The forms of the equations are:

Onshore Regions

$$\text{LLEQC}_{r,k,t} = \ln(\epsilon_0)_{r,k} + \ln(\epsilon_1)_k * \text{DEPTH}_{r,k,t} + \epsilon_{2,k} * \text{LESUCWELL}_{k,t} + \epsilon_{3,k} * \text{TIME}_t + \rho_k * \text{LLEQC}_{r,k,t-1} - \rho_k * (\ln(\epsilon_0)_{r,k} + \ln(\epsilon_1)_k * \text{DEPTH}_{r,k,t-1} + \epsilon_{2,k} * \text{LESUCWELL}_{k,t-1} + \epsilon_{3,k} * \text{TIME}_{t-1}) \quad (\text{D-5})$$

Results

Mapping of variable names from the above equation to the following TSP output.

Variable/Parameter	Shallow Oil	Shallow Gas	Deep Oil	Deep Gas
LLEQC	LSO_LEQ	LSG_LEQ	LDO_LEQ	LDG_LEQ
$\ln(\epsilon_0)_1$	SOREG1	SGREG1	--	--
$\ln(\epsilon_0)_2$	SOREG2	SGREG2	DOREG2	DGREG2
$\ln(\epsilon_0)_3$	SOREG3	SGREG3	DOREG3	DGREG3
$\ln(\epsilon_0)_4$	SOREG4	SGREG4	DOREG4	DGREG4
$\ln(\epsilon_0)_5$	SOREG5	SGREG5	DOREG5	DGREG5
$\ln(\epsilon_0)_6$	SOREG6	SGREG6	--	--
ϵ_1	SODEPTH	SGDEPTH	DODEPTH	DGDEPTH
ϵ_2	SOWELL	SGWELL	DOWELL	DGWELL
ϵ_3	TECH	TECH	TECH	TECH
ρ	SORHO	SGRHO	DORHO	DGRHO

THREE STAGE LEAST SQUARES

EQUATIONS: SOIL SGAS

INSTRUMENTS: REGION1 REGION2 REGION3 REGION4 REGION5 REGION6
 SG_DPTH SO_DPTH SG_DPTH(-1) SO_DPTH(-1) YEAR LSG_LEQ(-1)
 LSO_LEQ(-1) LSWWELL(-1) RPGAS_RPOIL RPGAS(-1) RPOIL(-1)

Number of Observations = 150

Parameter	Estimate	Standard Error	t-statistic	P-value
SOREG1	33.7741	6.08076	5.55426	[.000]
SOREG2	33.5586	6.07805	5.52127	[.000]
SOREG3	33.5302	6.08331	5.51184	[.000]
SOREG4	33.7847	6.08023	5.55649	[.000]
SOREG5	33.7353	6.07598	5.55223	[.000]
SOREG6	34.2506	6.07892	5.63432	[.000]
SODEPTH	.181898E-03	.104214E-04	17.4544	[.000]
SOWELL	.141601	.042041	3.36814	[.001]
TECH	-.012422	.294173E-02	-4.22259	[.000]
SORHO	.658138	.062543	10.5229	[.000]
SGREG1	32.8085	6.03814	5.43355	[.000]
SGREG2	33.0401	6.03673	5.47318	[.000]
SGREG3	33.0801	6.03622	5.48027	[.000]
SGREG4	33.4552	6.03766	5.54108	[.000]
SGREG5	33.6282	6.03247	5.57453	[.000]
SGREG6	32.8046	6.03793	5.43309	[.000]
SGDEPTH	.600314E-04	.815549E-05	7.36086	[.000]
SGWELL	.141891	.043189	3.28537	[.001]
SGRHO	.665599	.055584	11.9747	[.000]

Standard Errors computed from quadratic form of analytic first derivatives (Gauss)

Equation: SOIL

Dependent variable: LSO_LEQ

Mean of dep. var. = 11.2220
 Std. dev. of dep. var. = .331759
 Sum of squared residuals = .899774
 Variance of residuals = .599849E-02
 Std. error of regression = .077450
 R-squared = .945171
 Durbin-Watson = 1.90518 [<.859]

Equation: SGAS

Dependent variable: LSG_LEQ

Mean of dep. var. = 10.2228
 Std. dev. of dep. var. = .379077
 Sum of squared residuals = 1.32409
 Variance of residuals = .882729E-02
 Std. error of regression = .093954
 R-squared = .938205
 Durbin-Watson = 2.22580 [<.999]

THREE STAGE LEAST SQUARES

EQUATIONS: DOIL DGAS

INSTRUMENTS: REGION2 REGION3 REGION4 REGION5 DG_DPTH DO_DPTH
 DG_DPTH(-1) DO_DPTH(-1) YEAR LDG_LEQ(-1) LDO_LEQ(-1) LSUCWELL(-1)
 RPGAS RPOIL RPGAS(-1) RPOIL(-1)

Number of Observations = 100

Parameter	Estimate	Standard Error	t-statistic	P-value
DOREG2	19.9806	2.34600	8.51690	[.000]
DOREG3	19.9910	2.34584	8.52190	[.000]
DOREG4	20.0289	2.34601	8.53743	[.000]
DOREG5	20.0239	2.34668	8.53284	[.000]
DODEPTH	.262492E-04	.151868E-04	1.72842	[.084]
DOWELL	.332898	.019588	16.9950	[.000]
TECH	-.588957E-02	.116272E-02	-5.06534	[.000]
DGREG2	20.7534	2.38702	8.69425	[.000]
DGREG3	20.7847	2.38684	8.70805	[.000]
DGREG4	20.7550	2.38656	8.69663	[.000]
DGREG5	20.8759	2.38549	8.75119	[.000]
DGDEPTH	.163290E-04	.530570E-05	3.07763	[.002]
DGWELL	.143733	.028666	5.01403	[.000]
DGRHO	.703937	.055202	12.7519	[.000]

Standard Errors computed from quadratic form of analytic first derivatives (Gauss)

Equation: DOIL
 Dependent variable: LDO_LEQ

Mean of dep. var. = 12.0125
 Std. dev. of dep. var. = .179325
 Sum of squared residuals = .715547
 Variance of residuals = .715547E-02
 Std. error of regression = .084590
 R-squared = .776599
 Durbin-Watson = 1.89374 [<.882]

Equation: DGAS
 Dependent variable: LDG_LEQ

Mean of dep. var. = 10.7517
 Std. dev. of dep. var. = .145721
 Sum of squared residuals = .228672
 Variance of residuals = .228672E-02
 Std. error of regression = .047820
 R-squared = .891237
 Durbin-Watson = 1.24518 [<.020]

Onshore Operating Cost Equations

Operating costs were hypothesized to be a function of drilling, depth, and a time trend that proxies for the cumulative effect of technological advances on costs. The form of the equation was assumed to be log-linear. The equations were estimated in log-linear form using Three Stage Least Squares (3SLS) technique. The forms of the equations are:

Onshore Regions

$$\text{LOPC}_{r,k,t} = \ln(\phi_0)_{r,k} + \ln(\phi_1)_k * \text{DEPTH}_{r,k,t} + \phi_2_k * \text{LESUCWELL}_{k,t} + \phi_3_k * \text{TIME}_t + \rho_k * \text{LOPC}_{r,k,t-1} - \rho_k * (\ln(\phi_0)_{r,k} + \ln(\phi_1)_k * \text{DEPTH}_{r,k,t-1} + \phi_2_k * \text{LESUCWELL}_{k,t-1} + \phi_3_k * \text{TIME}_{t-1}) \quad (\text{D-6})$$

Results

Mapping of variable names from the above equation to the following TSP output

Variable/Parameter	Shallow Oil	Shallow Gas	Deep Oil	Deep Gas
LOPC	LSOILC	LSGASC	LDOILC	LDGASC
$\ln(\phi_0)_1$	SOREG1	SGREG1	--	--
$\ln(\phi_0)_2$	SOREG2	SGREG2	DOREG2	DGREG2
$\ln(\phi_0)_3$	SOREG3	SGREG3	DOREG3	DGREG3
$\ln(\phi_0)_4$	SOREG4	SGREG4	DOREG4	DGREG4
$\ln(\phi_0)_5$	SOREG5	SGREG5	DOREG5	DGREG5
$\ln(\phi_0)_6$	SOREG6	SGREG6	--	--
ϕ_1	SODEPTH	SGDEPTH	DODEPTH	DGDEPTH
ϕ_2	SOWELL	SGWELL	DOWELL	DGWELL
ϕ_3	TECH	TECH	TECH	TECH
ρ	SORHO	SGRHO	DORHO	DGRHO

THREE STAGE LEAST SQUARES

EQUATIONS: SOIL SGAS

INSTRUMENTS: REGION1 REGION6 REGION2 REGION3 REGION4 REGION5
 SG_DPTH SO_DPTH SG_DPTH(-1) SO_DPTH(-1) RPGAS RPOIL RPGAS(-1)
 RPOIL(-1) YEAR SUCWELL(-1) LSGASC(-1) LSOILC(-1)

Number of Observations = 120

Parameter	Estimate	Standard Error	t-statistic	P-value
SOREG1	19.7329	4.73937	4.16362	[.000]
SOREG2	19.8498	4.73884	4.18873	[.000]
SOREG3	19.4884	4.73855	4.11274	[.000]
SOREG4	19.5184	4.73874	4.11891	[.000]
SOREG5	19.9332	4.73466	4.21007	[.000]
SOREG6	19.9044	4.74014	4.19913	[.000]
SODEPTH	.946487E-04	.953023E-05	9.93141	[.000]
SOWELL	.609541E-05	.927934E-06	6.56879	[.000]
TECH	-.541966E-02	.237814E-02	-2.27895	[.023]
SORHO	.769252	.056975	13.5015	[.000]
SGREG1	19.5708	4.73677	4.13167	[.000]
SGREG2	20.0209	4.73384	4.22933	[.000]
SGREG3	19.9579	4.73792	4.21237	[.000]
SGREG4	20.1155	4.73428	4.24891	[.000]
SGREG5	20.2424	4.73299	4.27687	[.000]
SGREG6	19.6084	4.73393	4.14210	[.000]
SGDEPTH	.478768E-04	.439728E-05	10.8878	[.000]
SGWELL	.403359E-05	.590399E-06	6.83197	[.000]
SGRHO	.600537	.069593	8.62923	[.000]

Standard Errors computed from quadratic form of analytic first derivatives (Gauss)

Equation: SOIL
 Dependent variable: LSOILC

Mean of dep. var. = 9.51393
 Std. dev. of dep. var. = .311544
 Sum of squared residuals = .560455
 Variance of residuals = .467046E-02
 Std. error of regression = .068341
 R-squared = .951571
 Durbin-Watson = 1.80935 [<.779]

Equation: SGAS
 Dependent variable: LSGASC

Mean of dep. var. = 9.51859
 Std. dev. of dep. var. = .288909
 Sum of squared residuals = .179297
 Variance of residuals = .149414E-02
 Std. error of regression = .038654
 R-squared = .981949
 Durbin-Watson = 2.29087 [<1.00]

THREE STAGE LEAST SQUARES

EQUATIONS: DOIL DGAS

INSTRUMENTS: REGION2 REGION3 REGION4 REGION5 DG_DPTH DO_DPTH
 DG_DPTH(-1) DO_DPTH(-1) RPGAS RPOIL YEAR LDGASC(-1) LDOILC(-1)
 SUCWELL(-1)

Number of Observations = 80

Parameter	Estimate	Standard Error	t-statistic	P-value
DOREG2	16.4358	2.96641	5.54064	[.000]
DOREG3	16.2109	2.96659	5.46448	[.000]
DOREG4	16.2038	2.96615	5.46292	[.000]
DOREG5	16.4152	2.96584	5.53476	[.000]
DODEPTH	-.108916E-04	.118388E-04	-.919992	[.358]
DOWELL	.551732E-05	.675628E-06	8.16621	[.000]
TECH	-.321269E-02	.148901E-02	-2.15760	[.031]
DORHO	.655473	.062263	10.5275	[.000]
DGREG2	15.8203	2.95966	5.34532	[.000]
DGREG3	15.7774	2.95868	5.33259	[.000]
DGREG4	15.7656	2.95892	5.32817	[.000]
DGREG5	15.9259	2.95919	5.38187	[.000]
DGDEPTH	.335244E-04	.439767E-05	7.62323	[.000]
DGWELL	.458022E-05	.500397E-06	9.15317	[.000]
DGRHO	.379875	.096118	3.95220	[.000]

Standard Errors computed from quadratic form of analytic first derivatives (Gauss)

Equation: DOIL
 Dependent variable: LDOILC

Mean of dep. var. = 9.97100
 Std. dev. of dep. var. = .158303
 Sum of squared residuals = .155270
 Variance of residuals = .194088E-02
 Std. error of regression = .044055
 R-squared = .921664
 Durbin-Watson = 1.81815 [<.791]

Equation: DGAS
 Dependent variable: LDGASC

Mean of dep. var. = 9.99262
 Std. dev. of dep. var. = .119709
 Sum of squared residuals = .076420
 Variance of residuals = .955244E-03
 Std. error of regression = .030907
 R-squared = .932548
 Durbin-Watson = 2.08376 [<.977]

Industry Cash Flow

Industry cash flow was estimated as a function of the ratio of the price of oil in 1997 dollars to national operating cost index and the ratio of the wellhead price of gas to the national operating cost index for years 1979 through 1998. For each year, a weighted average of regional well operating costs (in 1997 dollars) was calculated for oil, shallow gas, and deep gas using successful wells from the previous year as weights. The national gas operating cost was calculated as a weighted average of the national shallow and deep operating costs using successful wells from the previous year as weights. The indices were then calculated by dividing the operating costs for each year by the operating cost for 1997. The econometric software package used for the estimations was TSP Version 4.4.

$$\text{Cashflow}_t = \alpha + \beta_1 * PC_OIL_t + \beta_2 * PC_GAS_t \quad (D-7)$$

Dependent variable: CASHFLOW
 Current sample: 2 to 21
 Number of observations: 20

Mean of dep. var. = .575347	LM het. test = 1.09504 [.295]
Std. dev. of dep. var. = .163198	Durbin-Watson = 1.62909 [<.322]
Sum of squared residuals = .032549	Jarque-Bera test = .341617 [.843]
Variance of residuals = .191464E-02	Ramsey's RESET2 = .219830 [.645]
Std. error of regression = .043757	F (zero slopes) = 123.650 [.000]
R-squared = .935679	Schwarz B.I.C. = -5.97139
Adjusted R-squared = .928112	Log likelihood = 35.8287

Variable	Estimated Coefficient	Standard Error	t-statistic	P-value
alpha	.081448	.049312	1.65167	[.117]
beta1	.011638	.190874E-02	6.09698	[.000]
beta2	.080572	.030551	2.63729	[.017]

Lower 48 Onshore Well Equations

Each of the onshore wells equations were estimated using panel data, i.e., data across regions over time. For oil and shallow gas, this included data for each of the six onshore regions over the sample period 1978-1999; for deep gas, this included data for onshore regions 2 through 5 over the same time period. The estimation procedures employed tested and corrected for the two econometric problems of cross sectional heteroscedasticity and first order serial correlation. Where necessary, the estimation corrected for first-order serial correlation. The econometric software package used for all estimations was TSP Version 4.4.

Oil Exploratory

$$\ln WELLSON_{i,r,k,t} = m0_{i,k} + m1_{i,k} \ln DCFON_{i,r,k,t-1} + m2_{i,k} \ln \left(CASHFLOW_t * \frac{r-UND_{r,k,t}}{UND-78_{r,k}} \right) + \rho_{i,k} \ln WELLSON_{i,r,k,t-1} - \rho_{i,k} (m0_{i,k} + m1_{i,k} \ln DCFON_{i,r,k,t-2} + m2_{i,k} \ln \left(CASHFLOW_{t-1} * \frac{r-UND_{r,k,t-1}}{UND-78_{r,k}} \right))$$

$i=1, r=1-6, k=1$

(D-8)

Dependent variable: LNWELLSON
Number of observations: 138

Mean of dep. var. = 5.13355	R-squared = .966094
Std. dev. of dep. var. = 1.97841	Adjusted R-squared = .965335
Sum of squared residuals = 18.6915	Durbin-Watson = 1.39062
Variance of residuals = .139489	Schwarz B.I.C. = 40.6686
Std. error of regression = .373482	Log likelihood = -30.8141

Parameter	Estimate	Standard Error	t-statistic	P-value
m0	-1.46742	2.19831	-.667520	[.504]
m1	.480247	.136647	3.51452	[.000]
m2	.714425	.185997	3.84106	[.000]
ρ	.975171	.012591	77.4511	[.000]

Oil Development

$$\begin{aligned}
 WELLSON_{i,r,k,t} = & m0_{i,k} + m05 * REG5 + m06 * REG6 + m1_{i,k} DCFON_{i,r,k,t-1} \\
 & + m2_{i,k} (CASHFLOW_t * \frac{r_UND_{r,k,t}}{UND_78_{r,k}}) + \rho_{i,k} WELLSON_{i,r,k,t-1} \\
 & - \rho_{i,k} (m0_{i,k} + m05 * REG5 + m06 * REG6 + m1_{i,k} DCFON_{i,r,k,t-2} \\
 & + m2_{i,k} (CASHFLOW_{t-1} * \frac{r_UND_{r,k,t-1}}{UND_78_{r,k}}))
 \end{aligned}
 \tag{D-9}$$

$i=2, r=1-6, k=1$

Dependent variable: WELLSON
 Number of observations: 138

Mean of dep. var. = 2.08153	R-squared = .935391
Std. dev. of dep. var. = 2.13945	Adjusted R-squared = .932943
Sum of squared residuals = 42.3092	Durbin-Watson = 1.38500
Variance of residuals = .320524	Schwarz B.I.C. = 129.188
Std. error of regression = .566149	Log likelihood = -114.406

Parameter	Estimate	Standard Error	t-statistic	P-value
m0	-4910.98	1861.64	-2.63798	[.008]
m05	-3815.92	1189.19	-3.20885	[.001]
m06	-4244.63	1679.72	-2.52698	[.012]
m1	.395367E-03	.147153E-03	2.68677	[.007]
m2	10400.4	923.972	11.2561	[.000]
ρ	.866018	.038931	22.2448	[.000]

Shallow Gas Exploratory

$$\ln WELLSON_{i,r,k,t} = m0_{r,k} + m1_{i,k} DCFON_{i,r,k,t} + m2_{i,k} (CASHFLOW_t * \frac{r_UND_{r,k,t}}{UND_78_{r,k}}) + \rho_{i,k} \ln WELLSON_{i,r,k,(t-1)} - \rho_{i,k} (m0_{r,k} + m1_{i,k} DCFON_{i,r,k,t-1} + m2_{i,k} (CASHFLOW_{t-1} * \frac{r_UND_{r,k,t-1}}{UND_78_{r,k}})) \quad (D-10)$$

$i=1, r=1-6, k=3$

Dependent variable: LNWELLSON
 Number of observations: 138

Mean of dep. var. = 18.1679	R-squared = .980179
Std. dev. of dep. var. = 6.01176	Adjusted R-squared = .978950
Sum of squared residuals = 99.0505	Durbin-Watson = 1.77926
Variance of residuals = .767833	Schwarz B.I.C. = 183.086
Std. error of regression = .876261	Log likelihood = -160.914

Parameter	Estimate	Standard Error	t-statistic	P-value
m0 _{1,3}	5.34399	.359644	14.8591	[.000]
m0 _{2,3}	5.69854	.340261	16.7476	[.000]
m0 _{3,3}	5.22923	.425066	12.3022	[.000]
m0 _{4,3}	4.76454	.631307	7.54709	[.000]
m0 _{5,3}	5.21877	.441732	11.8144	[.000]
m0 _{6,3}	3.53889	.435400	8.12790	[.000]
m1	.355874E-07	.190187E-07	1.87118	[.061]
m2	.980258	.246401	3.97831	[.000]
ρ	.897048	.040225	22.3007	[.000]

Shallow Gas Development

$$\ln WELLSON_{i,r,k,t} = m0_{i,k} + m00_r * REG_r + m1_{i,k} DCFON_{i,r,k,t} + m2_{i,k} (CASHFLOW_t * \frac{r-UND_{r,k,t}}{UND_{78,r,k}}) + \rho_{i,k} \ln WELLSON_{i,r,k,(t-1)} - \rho_{i,k} (m0_{i,k} + m00_r * REG_r + m1_{i,k} DCFON_{i,r,k,t-1} + m2_{i,k} (CASHFLOW_{t-1} * \frac{r-UND_{r,k,t-1}}{UND_{78,r,k}}))$$

(D-11)

$i=2, r=1-6, k=3$

Dependent variable: LNWELLSON

Number of observations: 144

Mean of dep. var. = 12.3192	R-squared = .985360
Std. dev. of dep. var. = 6.65258	Adjusted R-squared = .984492
Sum of squared residuals = 92.8175	Durbin-Watson = 1.94917
Variance of residuals = .687537	Schwarz B.I.C. = 191.035
Std. error of regression = .829178	Log likelihood = -168.671

Parameter	Estimate	Standard Error	t-statistic	P-value
m0	-.213749	.763787	-.279854	[.780]
m00 ₁	2.86221	.425493	6.72682	[.000]
m00 ₂	3.21379	.476465	6.74508	[.000]
m00 ₃	3.80968	.435330	8.75125	[.000]
m00 ₄	2.03920	.519351	3.92644	[.000]
m00 ₅	2.07791	.492318	4.22067	[.000]
m1	.307702E-06	.500676E-07	6.14573	[.000]
m2	1.56306	.592573	2.63775	[.008]
ρ	.698950	.066537	10.5047	[.000]

Deep Gas Exploratory

$$\ln WELLSON_{i,r,k,t} = m0_r + m1_{i,k} DCFON_{i,r,k,t-1} + m2_{i,k} (CASHFLOW_t * \frac{r_UND_{r,k,t}}{UND_78_{r,k}})$$

$i=1, r=2-5, k=4$

(D-12)

Dependent variable: LNWELLSON
 Number of observations: 92

Mean of dep. var. = 12.9320	LM het. test = .059335 [.808]
Std. dev. of dep. var. = 8.39489	Durbin-Watson = 1.61197 [<.097]
Sum of squared residuals = 91.7596	Jarque-Bera test = 1.91613 [.384]
Variance of residuals = 1.06697	Ramsey's RESET2 = .123719 [.726]
Std. error of regression = 1.03294	F (zero slopes) = 1184.92 [.000]
R-squared = .985692	Schwarz B.I.C. = 143.987
Adjusted R-squared = .984860	Log likelihood = -130.422

Variable	Estimated Coefficient	Standard Error	t-statistic	P-value
m0 ₂	3.88012	.147688	26.2724	[.000]
m0 ₃	2.09403	.142823	14.6618	[.000]
m0 ₄	1.59486	.185099	8.61625	[.000]
m0 ₅	1.73153	.237113	7.30256	[.000]
m1	.207654E-07	.617606E-08	3.36224	[.001]
m2	3.44606	.214500	16.0656	[.000]

Deep Gas Development

$$\ln WELLSON_{i,r,k,t} = m0_r + m1_{i,k} DCFON_{i,r,k,t-1} + m2_{i,k} (CASHFLOW_t * \frac{r-UND_{r,k,t}}{UND_78_{r,k}}) + \rho_{i,k} \ln WELLSON_{i,r,k,(t-1)} - \rho_{i,k} (m0_r + m1_{i,k} DCFON_{i,r,k,t-2} + m2_{i,k} (CASHFLOW_{t-1} * \frac{r-UND_{r,k,t-1}}{UND_78_{r,k}}))$$

$i=2, r=2-5, k=4$

Dependent variable: LNWELLSON
 Number of observations: 92

Mean of dep. var. = 18.9494	R-squared = .995172
Std. dev. of dep. var. = 11.4667	Adjusted R-squared = .994831
Sum of squared residuals = 57.8466	Durbin-Watson = 2.10706
Variance of residuals = .680548	Schwarz B.I.C. = 124.572
Std. error of regression = .824953	Log likelihood = -108.746

Parameter	Estimate	Standard Error	t-statistic	P-value
m0 ₂	4.34715	.455765	9.53812	[.000]
m0 ₃	3.39958	.468128	7.26207	[.000]
m0 ₄	1.81688	.569364	3.19107	[.001]
m0 ₅	1.79780	.609571	2.94928	[.003]
m1	.154641E-06	.296116E-07	5.22231	[.000]
m2	2.07828	.449984	4.61855	[.000]
ρ	.675167	.085276	7.91747	[.000]

Lower 48 Conventional Onshore Finding Rates

NEW FIELD WILDCAT FINDING RATE FOR LOWER 48 ONSHORE OIL

Oil discoveries per successful oil new field wildcat were hypothesized to be a function of drilling activity and the volume of remaining undiscovered resources. The coefficient on the resource base in the regression was permitted to vary across regions. The variables depth and the time trend were not included based on the results of a preliminary regression. The preliminary results also indicated the presence of heteroscedasticity and autocorrelation. The results presented below correct for these problems.

$$\ln FR1_{r,t} = m0 + m1_r * \ln RUND_{r,t} + m2 * \ln NFW_{r,t} + m3 * \ln WHP_{r,t} + \rho * \ln FR1_{r,t-1} - \rho * (m0 + m1_r * \ln RUND_{r,t-1} + m2 * \ln NFW_{r,t-1} + m3 * \ln WHP_{r,t-1})$$

(D-14)

Dependent variable: LNFR1
Number of observations: 125

Mean of dep. var. = -3.43472	R-squared = .958108
Std. dev. of dep. var. = 2.77860	Adjusted R-squared = .954829
Sum of squared residuals = 40.1061	Durbin-Watson = 1.94931
Variance of residuals = .348749	Schwarz B.I.C. = 130.453
Std. error of regression = .590550	Log likelihood = -106.312

Parameter	Estimate	Standard Error	t-statistic	P-value
WT	-25.5843	3.33163	-7.67921	[.000]
R_UND1	3.12132	.478648	6.52113	[.000]
R_UND2	2.79996	.412951	6.78037	[.000]
R_UND3	3.25245	.490989	6.62427	[.000]
R_UND4	2.89763	.431507	6.71514	[.000]
R_UND5	2.75805	.406661	6.78218	[.000]
LNNFW	-.623747	.100522	-6.20506	[.000]
LNREALWHP	.614321	.193913	3.16802	[.002]
DUMMY	-7.12307	.182143	-39.1071	[.000]
RHO	.169397	.092186	1.83757	[.066]

LNFR1 = natural log of new field wildcat finding rate

WT = m0 = overall constant

R_UNDr = m1_r = natural log of remaining undiscovered resources

LNNFW = m2 = natural log of the number of new field wildcats

LNREALWHP = m3 = natural log of the wellhead price in 1987 dollars

DUMMY = 1 if discoveries were "guesstimated", 0 otherwise (not included in forecasting equation)

NEW FIELD WILDCAT FINDING RATE FOR LOWER 48 ONSHORE CONVENTIONAL GAS

Gas discoveries per successful gasl new field wildcat were hypothesized to be a function of drilling activity, well depth, and the volume of remaining undiscovered resources. The coefficient on the resource base in the regression was permitted to vary across regions. The time trend was not included based on the results of a preliminary regression. The preliminary results also indicated the presence of heteroscedasticity and autocorrelation. The results presented below correct for these problems.

Dependent variable: LNFR1

$$\ln FR1_{r,t} = m0 + m1_r * \ln RUND_{r,t} + m2 * \ln NFW_{r,t} + \rho * \ln FR1_{r,t-1} - \rho * (m0 + m1_r * \ln RUND_{r,t-1} + m2 * \ln NFW_{r,t-1}) \tag{D-15}$$

Number of observations: 144

Mean of dep. var. = -0.446239	R-squared = .847706
Std. dev. of dep. var. = 2.28111	Adjusted R-squared = .837477
Sum of squared residuals = 113.326	Durbin-Watson = 1.90970
Variance of residuals = .845715	Schwarz B.I.C. = 212.049
Std. error of regression = .919628	Log likelihood = -187.200

Parameter	Estimate	Standard Error	t-statistic	P-value
WT	-18.9990	5.74030	-3.30975	[.001]
RUND1	2.19548	.659412	3.32945	[.001]
RUND2	1.91310	.532985	3.58940	[.000]
RUND3	2.07934	.606666	3.42748	[.001]
RUND4	2.12188	.619630	3.42443	[.001]
RUND5	1.99902	.602317	3.31888	[.001]
RUND6	2.29233	.662070	3.46236	[.001]
LNNFW	-.362847	.151376	-2.39700	[.017]
DUM	-7.63479	.349970	-21.8156	[.000]
RHO	.290008	.082836	3.50101	[.000]

LNFR1 = natural log of new field wildcat finding rate, FR1, where FR1 is equal new field discoveries divided by successful new field wildcats drilled

WT = m0 = overall constant

RUNDr = m1_r = natural log of remaining undiscovered resources

LNNFW = m2 = number of successful conventional new field wildcats drilled

DUM = 1, if discoveries were "guesstimated", 0, otherwise. (not used in forecasting equation)

LOWER 48 ONSHORE OTHER EXPLORATORY FINDING RATES

The other exploratory finding rate equations for oil and natural gas were each estimated using a panel data set for the six onshore regions over the 1978-2000 time period. Equations were estimated with corrections for cross sectional heteroscedasticity and first order serial correlation.

OTHER EXPLORATORY FINDING RATE EQUATION FOR OIL

$$\ln FR2_{r,t} = m0 + m1 * \ln INFR_{r,t} + m2 * \ln WELLS_{r,t} + m3 * YEAR_t + \rho * \ln FR2_{r,t-1} - \rho * (m0 + m1 * \ln INFR_{r,t-1} + m2 * \ln WELLS_{r,t-1} + m3 * YEAR_{t-1}) \tag{D-16}$$

Dependent variable: LNFR2
 Number of observations: 150

Mean of dep. var. = -6.68447	R-squared = .950236
Std. dev. of dep. var. = 3.49921	Adjusted R-squared = .948863
Sum of squared residuals = 91.3810	Durbin-Watson = 2.01556
Variance of residuals = .630214	Schwarz B.I.C. = 187.501
Std. error of regression = .793860	Log likelihood = -174.974

Parameter	Estimate	Standard Error	t-statistic	P-value
WT	-62.4547	29.1118	-2.14534	[.032]
INFR	.665618	.131960	5.04410	[.000]
LNWELLS	-.466223	.098704	-4.72346	[.000]
YEAR	.028350	.014264	1.98752	[.047]
RHO	.698543	.070843	9.86046	[.000]

LNFR2 = natural log of [extensions/(other exploratory + development wells)]
 WT = m0 = overall constant
 INFR = m1 = natural log of remaining inferred reserves
 LNWELLS = m2 = natural log of other exploratory plus developmental wells
 YEAR = m3 = calendar year

OTHER EXPLORATORY FINDING RATE EQUATION FOR CONVENTIONAL GAS

$$\ln FR2_{r,t} = m0 + m1 * \ln INFR_{r,t} + m2 * \ln WELLS_{r,t} + m3 * \ln WHP_t + \rho * \ln FR2_{r,t-1} - \rho * (m0 + m1 * \ln INFR_{r,t-1} + m2 * \ln WELLS_{r,t-1} + m3 * \ln WHP_{t-1}) \quad (D-17)$$

Dependent variable: LNFR2
 Number of observations: 144

Mean of dep. var. = -.470691	R-squared = .673858
Std. dev. of dep. var. = 1.40857	Adjusted R-squared = .664472
Sum of squared residuals = 92.6568	Durbin-Watson = 2.00710
Variance of residuals = .666596	Schwarz B.I.C. = 183.002
Std. error of regression = .816453	Log likelihood = -170.577

Parameter	Estimate	Standard Error	t-statistic	P-value
WT	-2.02362	.589922	-3.43032	[.001]
INFR	.440990	.065865	6.69531	[.000]
LNWELLS	-.459404	.085958	-5.34452	[.000]
LNWHP	.703366	.171015	4.11289	[.000]
RHO	.647909	.067228	9.63753	[.000]

LNFR2 = natural log of FR2 where FR2 is a two year weighted average equal to (extensions in t + extensions in t-1) divided by (other exploratory and development wells in t + other exploratory and development wells in t-1)

WT = m0 = overall constant

INFR = m1 = natural log of remaining inferred reserves

LNWELLS = m2 = natural log of successful other exploratory + development wells

LNWHP = m3 = natural log of the wellhead price of gas in 1987 dollars

Lower 48 Onshore Crude Oil Revisions

$$\text{REVISIONS}_{r,t} = ((e^{B0_{r,k}} * ((\text{INFR}_{r,k,t} + \text{BOYRES}_{r,k,t}) / \text{BOYRES}_{r,k,t})^{B1_{r,k}} * e^{B2 * \text{WHP}_{r,k,t}} * e^{B3 * \text{WHP}_{r,k,t}^2} * e^{B4 * \text{WHP}_{r,k,t} / \text{WHP}_{r,k,t-1}} * e^{B5 * \text{CUMDWL}_{r,k,t}}) - 1) * \text{BOYRES}_{r,k,t} \quad (\text{D-18})$$

Dependent variable: LN((REVISION+BOYRESERVES)/BOYRESERVES)

Number of observations: 144

Mean of dep. var. = 1.66286	LM het. test = .041794 [.838]
Std. dev. of dep. var. = 1.35983	Durbin-Watson = 1.99243 [<.925]
Sum of squared residuals = 142.136	Jarque-Bera test = .198033 [.906]
Variance of residuals = 1.11044	Ramsey's RESET2 = 1.91558 [.169]
Std. error of regression = 1.05377	F (zero slopes) = 7.34196 [.000]
R-squared = .462477	Schwarz B.I.C. = 243.148
Adjusted R-squared = .399486	Log likelihood = -203.389

Variable	Estimated Coefficient	Standard Error	t-statistic	P-value
REG1	-.541106	.153139	-3.53344	[.001]
REG2	-.248586	.054247	-4.58245	[.000]
REG3	-1.10624	.221213	-5.00079	[.000]
REG4	-.933665	.154836	-6.03004	[.000]
REG5	-.355171	.132484	-2.68085	[.008]
REG6	-.369608	.156335	-2.36421	[.020]
REMAIN1	.297223	.110831	2.68178	[.008]
REMAIN2	.113628	.062487	1.81843	[.071]
REMAIN3	.587352	.131341	4.47197	[.000]
REMAIN4	.504829	.096822	5.21399	[.000]
REMAIN5	.134031	.065475	2.04705	[.043]
REMAIN6	.190950	.118029	1.61783	[.108]
REALWHP	.738073E-02	.249324E-02	2.96030	[.004]
REALWHP_SQ	-.121759E-03	.481235E-04	-2.53013	[.013]
DELTA_WELLHEAD_PRICE	.041220	.013957	2.95340	[.004]
CUM_DEV_WELLS	.143406E-05	.221573E-06	6.47218	[.000]

REGr = B0: regional constant
 REMAINr = B1: measure of inferred reserves
 REALWHP = B2: wellhead price
 REALWHP_SQ = B3: wellhead price squared
 DELTA_WELLHEAD_PRICE = B4: ratio of wellhead prices in year t and t-1
 CUM_DEV_WELLS = B5: cumulative developmental wells

Associated Dissolved Gas Equations

Associated dissolved gas production was hypothesized to be a function of crude oil production. The form of the equation was assumed to be log-linear. The equations were estimated in log-linear form using ordinary least squares (OLS) technique available in TSP. The forms of the equations are :

$$\text{LNADGAS}_{r,t} = \alpha_r + \beta_r * \text{LNOILPROD}_{r,t} + \rho * \text{LNADGAS}_{r,t-1} - \rho * (\alpha_r + \beta_r * \text{LNOILPROD}_{r,t-1}) \quad (\text{D-19})$$

Results

Dependent variable: LNADGAS
Number of observations: 60

Mean of dep. var. = 55.9300	R-squared = .999085
Std. dev. of dep. var. = 29.7588	Adjusted R-squared = .998962
Sum of squared residuals = 47.8843	Durbin-Watson = 1.74048
Variance of residuals = .920852	Schwarz B.I.C. = 94.2222
Std. error of regression = .959610	Log likelihood = -77.8448

Parameter	Estimate	Standard Error	t-statistic	P-value
REGION1	2.54864	.480305	5.30629	[.000]
REGION2	2.74877	.712236	3.85936	[.000]
REGION3	2.48935	.632982	3.93274	[.000]
REGION4	2.79976	.761646	3.67593	[.000]
REGION5	2.39457	.647214	3.69981	[.000]
REGION6	1.85209	.703128	2.63407	[.008]
LNOILPROD	.589867	.123647	4.77057	[.000]
RHO	.509492	.126798	4.01814	[.000]

LNADGAS = natural log of AD gas production
REGION_r = α_r = regional constant
LNOILPROD = β_r = natural log of crude oil production

Canadian Successful Gas Wells Equations

The equation to forecast successful gas wells in Western Canada was estimated for the time period 1978-2001 using aggregated wells and production data for the Western Canadian provinces of Alberta, British Columbia and Saskatchewan and price data for Canada as a whole. The form of the estimating equation is given by:

$$\ln\text{GWELLS}_t = \beta_0 + \beta_1 * \ln\text{GPRICE}_t + \rho * \ln\text{GWELLS}_{t-1} - \rho * (\beta_0 + \beta_1 * \ln\text{GPRICE}_{t-1}) \quad (\text{D-20})$$

where lnGWELLS is the natural log of successful gas wells drilled in Western Canada and lnGPRICE is the natural log of real Canadian gas price. The equation was estimated using version 4.4 of the econometric software package TSP. Parameter estimates and regression diagnostics are given below.

Method of estimation = Ordinary Least Squares

Dependent variable: LNGWELL
Current sample: 8 to 31 (1978 - 2001)
Number of observations: 24

(Statistics based on transformed data) (Statistics based on original data)

Mean of dep. var. = 1.64354	Mean of dep. var. = 8.01205
Std. dev. of dep. var. = .768278	Std. dev. of dep. var. = .611031
Sum of squared residuals = 3.21959	Sum of squared residuals = 3.25538
Variance of residuals = .153314	Variance of residuals = .155018
Std. error of regression = .391553	Std. error of regression = .393723
R-squared = .764527	R-squared = .631249
Adjusted R-squared = .742101	Adjusted R-squared = .596129
Durbin-Watson = 1.85913	Durbin-Watson = 1.84796
Rho (autocorrelation coef.) = .816442	
Log likelihood = -10.4981	

Parameter	Estimate	Standard Error	t-statistic	P-value
C	7.57685	.437463	17.3200	[.000]
LNGPRICE	.921915	.404334	2.28008	[.023]
RHO	.816442	.110851	7.36524	[.000]

LNGWELL = natural log of successful gas wells drilled in Western Canada

C = β_1 = constant

LNGPRICE = β_2 = natural log of real Canadian gas price

Appendix 3-A. Discounted Cash Flow Algorithm

Introduction

The basic DCF methodology used in the Oil and Gas Supply Module (OGSM) is applied for a broad range of oil or natural gas projects, including single well projects or multiple well projects within a field. It is designed to capture the effects of multi-year capital investments (eg., offshore platforms). The expected discounted cash flow value associated with exploration and/or development of a project with oil or gas as the primary fuel in a given region evaluated in year T may be presented in a stylized form (Equation 3A-1).

$$DCF_T = (PVTREV - PVROY - PVPRODTAX - PVDRILLCOST - PVEQUIP - PVKAP - PVOPCOST - PVABANDON - PVSIT - PVFIT)_T \quad (3A-1)$$

where,

T	=	year of evaluation
PVTREV	=	present value of expected total revenues
PVROY	=	present value of expected royalty payments
PVPRODTAX	=	present value of expected production taxes (ad valorem and severance taxes)
PVDRILLCOST	=	present value of expected exploratory and developmental drilling expenditures
PVEQUIP	=	present value of expected lease equipment costs
PVKAP	=	present value of other expected capital costs (i.e., gravel pads and offshore platforms)
PVOPCOST	=	present value of expected operating costs
PVABANDON	=	present value of expected abandonment costs
PVSIT	=	present value of expected state corporate income taxes
PVFIT	=	present value of expected federal corporate income taxes.

Costs are assumed constant over the investment life but vary across both region and primary fuel type. This assumption can be changed readily if required by the user. Relevant tax provisions also are assumed unchanged over the life of the investment. Operating losses incurred in the initial investment period are carried forward and used against revenues generated by the project in later years.

The following sections describe each component of the DCF calculation. Each variable of Equation 3A-1 is discussed starting with the expected revenue and royalty payments, followed by the expected costs, and lastly the expected tax payments.

Present Value of Expected Revenues, Royalty Payments, and Production Taxes

Revenues from an oil or gas project are generated from the production and sale of both the primary fuel as well as any co-products. The present value of expected revenues measured at the wellhead from the production of a representative project is defined as the summation of yearly expected net wellhead price¹

¹The DCF methodology accommodates price expectations that are myopic, adaptive, or perfect. The default is myopic expectations, so prices are assumed to be constant throughout the economic evaluation period.

times expected production² discounted at an assumed rate. The present value of expected revenue for either the primary fuel or its co-product is calculated as follows:

$$PVREV_{T,k} = \sum_{t=T}^{T+n} \left[Q_{t,k} * \lambda * P_{t,k} * \left[\frac{1}{1+disc} \right]^{t-T} \right], \lambda = \begin{cases} 1 & \text{if primary fuel} \\ COPRD & \text{if secondary fuel} \end{cases} \quad (3A-2)$$

where,

- k = fuel type (oil or natural gas)
- t = time period
- n = number of years in the evaluation period
- disc = expected discount rate
- Q = expected production volumes
- P = expected net wellhead price
- COPRD = co-product factor.³

Net wellhead price is equal to the market price minus any transportation costs. Market prices for oil and gas are defined as: the price at the receiving refinery for oil, the first purchase price for onshore natural gas, the price at the coastline for offshore natural gas, and the price at the Canadian border for Alaskan gas.

The present value of the total expected revenue generated from the representative project is:

$$PVTREV_T = PVREV_{T,1} + PVREV_{T,2} \quad (3A-3)$$

where,

- PVREV_{T,1} = present value of expected revenues generated from the primary fuel
- PVREV_{T,2} = present value of expected revenues generated from the secondary fuel.

Present Value of Expected Royalty Payments

The present value of expected royalty payments (PVROY) is simply a percentage of expected revenue and is equal to:

$$PVROY_T = ROYRT_1 * PVREV_{T,1} + ROYRT_2 * PVREV_{T,2} \quad (3A-4)$$

where,

- ROYRT = royalty rate, expressed as a fraction of gross revenues.

²Expected production is determined outside the DCF subroutine. The determination of expected production is described in Chapter 4.

³The OGSM determines coproduct production as proportional to the primary product production. COPRD is the ratio of units of coproduct per unit of primary product.

Present Value of Expected Production Taxes

Production taxes consist of ad valorem and severance taxes. The present value of expected production tax is given by:

$$\text{PVPROD}\text{TAX}_T = \text{PVREV}_{T,1} * (1 - \text{ROYRT}_1) * \text{PRODTAX}_1 + \text{PVREV}_{T,2} * (1 - \text{ROYRT}_2) * \text{PRODTAX}_2 \quad (3A-5)$$

where,

PRODTAX = production tax rate.

PVPRODAX is computed as net of royalty payments because the investment analysis is conducted from the point of view of the operating firm in the field. Net production tax payments represent the burden on the firm because the owner of the mineral rights generally is liable for his/her share of these taxes.

Present Value of Expected Costs

Costs are classified within the OGSM as drilling costs, lease equipment costs, other capital costs, operating costs (including production facilities and general/administrative costs), and abandonment costs. These costs differ among successful exploratory wells, successful developmental wells, and dry holes. The present value calculations of the expected costs are computed in a similar manner as PVREV (i.e., costs are discounted at an assumed rate and then summed across the evaluation period.)

Present Value of Expected Drilling Costs

Drilling costs represent the expenditures for drilling successful wells or dry holes and for equipping successful wells through the Christmas tree installation.⁴ Elements included in drilling costs are labor, material, supplies and direct overhead for site preparation, road building, erecting and dismantling derricks and drilling rigs, drilling, running and cementing casing, machinery, tool changes, and rentals.

The present value of expected drilling costs is given by:

$$\text{PVDRILL}\text{COST}_T = \sum_{t=T}^{T+n} \left[\text{COSTEXP}_T * \text{SR}_1 * \text{NUMEXP}_t + \text{COSTDEV}_T * \text{SR}_2 * \text{NUMDEV}_T + \text{COSTDRY}_{T,1} * (1 - \text{SR}_1) * \text{NUMEXP}_t + \text{COSTDRY}_{T,2} * (1 - \text{SR}_2) * \text{NUMDEV}_t \right] * \left(\frac{1}{1 + \text{disc}} \right)^{t-T} \quad (3A-6)$$

where,

COSTEXP = drilling cost for a successful exploratory well
 SR = success rate (1=exploratory, 2=developmental)

⁴The Christmas tree refers to the valves and fittings assembled at the top of a well to control the fluid flow.

COSTDEV	=	drilling cost for a successful developmental well
COSTDRY	=	drilling cost for a dry hole (1=exploratory, 2=developmental).
NUMEXP	=	number of exploratory wells drilled in a given period
NUMDEV	=	number of developmental wells drilled in a given period.

The number and schedule of wells drilled for a oil or gas project are supplied as part of the assumed production profile. This is based on historical drilling activities.

Present Value of Expected Lease Equipment Costs

Lease equipment costs include the cost of all equipment extending beyond the Christmas tree, directly used to obtain production from a drilled lease. Three categories of costs are included: producing equipment, the gathering system, and processing equipment. Producing equipment costs include tubing, rods, and pumping equipment. Gathering system costs consist of flowlines and manifolds. Processing equipment costs account for the facilities utilized by successful wells. The present value of expected lease equipment cost is

$$PVEQUIP_T = \sum_{t=T}^{T+n} \left[EQUIP_T * (SR_1 * NUMEXP_t + SR_2 * NUMDEV_t) * \left[\frac{1}{1 + \text{disc}} \right]^{t-T} \right] \quad (3A-7)$$

where,

EQUIP = lease equipment costs per well.

Present Value of Other Expected Capital Costs

Other major capital expenditures include the cost of gravel pads in Alaska, and offshore platforms. These costs are exclusive of lease equipment costs. The present value of other expected capital costs is calculated as:

$$PVKAP_T = \sum_{t=T}^{T+n} \left[KAP_t * \left[\frac{1}{1 + \text{disc}} \right]^{t-T} \right] \quad (3A-8)$$

where,

KAP = other major capital expenditures, exclusive of lease equipment.

Present Value of Expected Operating Costs

Operating costs include three main categories of costs: normal daily operations, surface maintenance, and subsurface maintenance. Normal daily operations are further broken down into supervision and overhead, labor, chemicals, fuel, water, and supplies. Surface maintenance accounts for all labor and materials necessary to keep the service equipment functioning efficiently and safely. Costs of stationary facilities, such as roads, also are included. Subsurface maintenance refers to the repair and services required to keep the downhole equipment functioning efficiently.

Total operating cost in time t is calculated by multiplying the cost of operating a well by the number of producing wells in time t. Therefore, the present value of expected operating costs is as follows:

$$PVOPCOST_T = \sum_{t=T}^{T+R} \left[OPCOST_T * \sum_{k=1}^t [SR_1 * NUMEXP_k + SR_2 * NUMDEV_k] * \left(\frac{1}{1 + \text{disc}} \right)^{t-T} \right] \quad (3A-9)$$

where,

OPCOST = operating costs per well.

Present Value of Expected Abandonment Costs

Producing facilities are eventually abandoned and the cost associated with equipment removal and site restoration is defined as

$$PVABANDON_T = \sum_{t=T}^{T+R} \left[COSTABN_T * \left[\frac{1}{1 + \text{disc}} \right]^{t-T} \right] \quad (3A-10)$$

where,

COSTABN = abandonment costs.

Drilling costs, lease equipment costs, operating costs, abandonment costs, and other capital costs incurred in each individual year of the evaluation period are integral components of the following determination of State and Federal corporate income tax liability.

Present Value of Expected Income Taxes

An important aspect of the DCF calculation concerns the tax treatment. All expenditures are divided into depletable,⁵ depreciable, or expensed costs according to current tax laws. All dry hole and operating costs are expensed. Lease costs (i.e., lease acquisition and geological and geophysical costs) are capitalized and then amortized at the same rate at which the reserves are extracted (cost depletion). Drilling costs are split between tangible costs (depreciable) and intangible drilling costs (IDC's) (expensed). IDC's include wages, fuel, transportation, supplies, site preparation, development, and repairs. Depreciable costs are amortized in accord with schedules established under the Modified Accelerated Cost Recovery System (MACRS).

Key changes in the tax provisions under the tax legislation of 1988 include:

- Windfall Profits Tax on oil was repealed,
- Investment Tax Credits were eliminated, and
- Depreciation schedules shifted to a Modified Accelerated Cost Recovery System.

⁵The DCF methodology does not include lease acquisition or geological & geophysical expenditures because they are not relevant to the incremental drilling decision.

Tax provisions vary with type of producer (major, large independent, or small independent) as shown in Table 3A-1. A major oil company is one that has integrated operations from exploration and development through refining or distribution to end users. An independent is any oil and gas producer or owner of an interest in oil and gas property not involved in integrated operations. Small independent producers are those with less than 1,000 barrels per day of production (oil and gas equivalent). The present DCF methodology reflects the tax treatment provided by current tax laws for large independent producers.

Table 3A-1. Tax Treatment in Oil and Gas Production by Category of Company Under Current Tax Legislation

Costs by Tax Treatment	Majors	Large Independents	Small Independents
Depletable Costs	Cost Depletion G&G ^a Lease Acquisition	Cost Depletion^b G&G Lease Acquisition	Maximum of Percentage or Cost Depletion G&G Lease Acquisition
Depreciable Costs	MACRS^c Lease Acquisition Other Capital Expenditures Successful Well Drilling Costs Other than IDC's 5-year SLM^d 20 percent of IDC's	MACRS Lease Acquisition Other Capital Expenditures Successful Well Drilling Costs Other than IDC's	MACRS Lease Acquisition Other Capital Expenditures Successful Well Drilling Costs Other than IDC's
Expensed Costs	Dry Hole Costs 80 percent of IDC's Operating Costs	Dry Hole Costs 80 percent of IDC's Operating Costs	Dry Hole Costs 80 percent of IDC's Operating Costs

The resulting present value of expected taxable income (PVTAXBASE) is given by:

$$\text{PVTAXBASE}_T = \sum_{t=T}^{T+n} \left[(\text{TREV}_t - \text{ROY}_t - \text{PRODTAX}_t - \text{OPCOST}_t - \text{ABANDON}_t - \text{XIDC}_t - \text{AIDC}_t - \text{DEPREC}_t - \text{DHC}_t) * \left(\frac{1}{1 + \text{disc}} \right)^{t-T} \right] \quad (3A-11)$$

where,

- T = year of evaluation
- t = time period
- n = number of years in the evaluation period
- TREV = expected revenues
- ROY = expected royalty payments
- PRODTAX = expected production tax payments
- OPCOST = expected operating costs
- ABANDON = expected abandonment costs
- XIDC = expected expensed intangible drilling costs

AIDC	=	expected amortized intangible drilling costs ⁶
DEPREC	=	expected depreciable tangible drilling, lease equipment costs, and other capital expenditures
DHC	=	expected dry hole costs
disc	=	expected discount rate.

TREV_t, ROY_t, PRODTAX_t, OPCOST_t, and ABANDON_t are the nondiscounted individual year values. The following sections describe the treatment of expensed and amortized costs for purpose of determining corporate income tax liability at the State and Federal level.

Expected Expensed Costs

Expensed costs are intangible drilling costs, dry hole costs, operating costs, and abandonment costs. Expensed costs and taxes (including royalties) are deductible from taxable income.

Expected Intangible Drilling Costs

For large independent producers, all intangible drilling costs are expensed. However, this is not true across the producer category (as shown in Table 1). In order to maintain analytic flexibility with respect to changes in tax provisions, the variable XDCKAP (representing the portion of intangible drilling costs that must be depreciated) is included. Expected expensed IDC's are defined as follows:

$$XIDC_t = COSTEXP_T * (1 - EXKAP) * (1 - XDCKAP) * SR_1 * NUMEXP_t + COSTDEV_T * (1 - DVKAP) * (1 - XDCKAP) * SR_2 * NUMDEV_t \quad (3A-12)$$

where,

COSTEXP	=	drilling cost for a successful exploratory well
EXKAP	=	fraction of exploratory drilling costs that are tangible and must be depreciated
XDCKAP	=	fraction of intangible drilling costs that must be depreciated ⁷
SR	=	success rate (1=exploratory, 2=developmental)
NUMEXP	=	number of exploratory wells
COSTDEV	=	drilling cost for a successful developmental well
DVKAP	=	fraction of developmental drilling costs that are tangible and must be depreciated
NUMDEV	=	number of developmental wells.

If only a portion of IDC's are expensed (as is the case for major producers), the remaining IDC's must be depreciated. These costs are recovered at a rate of 10 percent in the first year, 20 percent annually for four years, and 10 percent in the sixth year, referred to as the 5-year Straight Line Method (SLM) with half year convention. If depreciable costs accrue when fewer than 6 years remain in the life of the project, then costs are recovered using a simple straight line method over the remaining period.

Thus, the value of expected depreciable IDC's is represented by:

⁶This variable is included only for completeness. For large independent producers, all intangible drilling costs are expensed.

⁷The fraction of intangible drilling costs that must be depreciated is set to zero as a default to conform with the tax perspective of a large independent firm.

$$\begin{aligned}
AIDC_t = \sum_{j=\beta}^t & \left[(COSTEXP_T * (1 - EXKAP) * XDCKAP * SR_1 * NUMEXP_j + \right. \\
& \left. COSTDEV_T * (1 - DVKAP) * XDCKAP * SR_2 * NUMDEV_j) * \right. \\
& \left. DEPIDC_{t-j+1} * \left(\frac{1}{1 + infl} \right)^{t-j} * \left(\frac{1}{1 + disc} \right)^{t-j} \right], \tag{3A-13} \\
\beta = & \begin{cases} T & \text{for } t \leq T+m-1 \\ t-m+1 & \text{for } t > T+m-1 \end{cases}
\end{aligned}$$

where,

- j = year of recovery
- β = index for write-off schedule
- DEPIDC = for $t \leq n+T-m$, 5-year SLM recovery schedule with half year convention; otherwise, $1/(n+T-t)$ in each period
- infl = expected inflation rate⁸
- disc = expected discount rate
- m = number of years in standard recovery period.

AIDC will equal zero by default since the DCF methodology reflects the tax treatment pertaining to large independent producers.

Expected Dry Hole Costs

All dry hole costs are expensed. Expected dry hole costs are defined as

$$DHC_t = COSTDRY_{T,1} * (1 - SR_1) * NUMEXP_t + COSTDRY_{T,2} * (1 - SR_2) * NUMDEV_t \tag{3A-14}$$

where,

- COSTDRY = drilling cost for a dry hole (1=exploratory, 2=developmental).

Total expensed costs in any year equals the sum of $XIDC_t$, $OPCOST_t$, $ABANDON_t$, and DHC_t .

Expected Depreciable Tangible Drilling Costs, Lease Equipment Costs and Other Capital Expenditures

Amortization of depreciable costs, excluding capitalized IDC's, conforms to the Modified Accelerated Cost Recovery System (MACRS) schedules. The schedules under differing recovery periods appear in Table 3A-2. The particular period of recovery for depreciable costs will conform to the specifications of the tax code. These recovery schedules are based on the declining balance method with half year convention. If

⁸The write-off schedule for the 5-year SLM give recovered amounts in nominal dollars. Therefore, recovered costs are adjusted for expected inflation to give an amount in expected constant dollars since the DCF calculation is based on constant dollar values for all other variables.

Table 3A-2. MACRS Schedules
(Percent)

Year	3-year Recovery Period	5-year Recovery Period	7-year Recovery Period	10-year Recovery Period	15-year Recovery Period	20-year Recovery Period
1	33.33	20.00	14.29	10.00	5.00	3.750
2	44.45	32.00	24.49	18.00	9.50	7.219
3	14.81	19.20	17.49	14.40	8.55	6.677
4	7.41	11.52	12.49	11.52	7.70	6.177
5		11.52	8.93	9.22	6.93	5.713
6		5.76	8.92	7.37	6.23	5.285
7			8.93	6.55	5.90	4.888
8			4.46	6.55	5.90	4.522
9				6.56	5.91	4.462
10				6.55	5.90	4.461
11				3.28	5.91	4.462
12					5.90	4.461
13					5.91	4.462
14					5.90	4.461
15					5.91	4.462
16					2.95	4.461
17						4.462
18						4.461
19						4.462
20						4.461
21						2.231

Source: U.S. Master Tax Guide.

depreciable costs accrue when fewer years remain in the life of the project than would allow for cost recovery over the standard period, then costs are recovered using a straight line method over the remaining period.

The expected tangible drilling costs, lease equipment costs, and other capital expenditures is defined as

$$\begin{aligned}
 \text{DEPREC}_t = \sum_{j=\beta}^t & \left[\left[(\text{COSTEXP}_T * \text{EXKAP} + \text{EQUIP}_T) * \text{SR}_1 * \text{NUMEXP}_j + \right. \right. \\
 & \left. \left. (\text{COSTDEV}_T * \text{DVKAP} + \text{EQUIP}_T) * \text{SR}_2 * \text{NUMDEV}_j + \text{KAP}_j \right] * \right. \\
 & \left. \text{DEP}_{t-j+1} * \left(\frac{1}{1 + \text{infl}} \right)^{t-j} * \left(\frac{1}{1 + \text{disc}} \right)^{t-j} \right], \tag{3A-15} \\
 \beta = & \begin{cases} T & \text{for } t \leq T+m-1 \\ t-m+1 & \text{for } t > T+m-1 \end{cases}
 \end{aligned}$$

where,

- j = year of recovery
- β = index for write-off schedule
- m = number of years in standard recovery period
- COSTEXP = drilling cost for a successful exploratory well
- EXKAP = fraction of exploratory drilling costs that are tangible and must be depreciated
- EQUIP = lease equipment costs per well
- SR = success rate (1=exploratory, 2=developmental)

NUMEXP	=	number of exploratory wells
COSTDEV	=	drilling cost for a successful developmental well
DVKAP	=	fraction of developmental drilling costs that are tangible and must be depreciated
NUMDEV	=	number of developmental wells drilled in a given period
KAP	=	major capital expenditures such as gravel pads in Alaska or offshore platforms, exclusive of lease equipment
DEP	=	for $t \leq n+T-m$, MACRS with half year convention; otherwise, $1/(n+T-t)$ in each period
infl	=	expected inflation rate ⁹
disc	=	expected discount rate.

Present Value of Expected State and Federal Income Taxes

The present value of expected state corporate income tax is determined by

$$PVSIT_T = PVTAXBASE_T * STRT \quad (3A-16)$$

where,

PVTAXBASE	=	present value of expected taxable income (Equation 3A-14)
STRT	=	state income tax rate.

The present value of expected federal corporate income tax is calculated using the following equation:

$$PVFIT_T = PVTAXBASE_T * (1 - STRT) * FDRT \quad (3A-17)$$

where,

FDRT	=	federal corporate income tax rate.
------	---	------------------------------------

Summary

The discounted cash flow calculation is a useful tool for evaluating the expected profit or loss from an oil or gas project. The calculation reflects the time value of money and provides a good basis for assessing and comparing projects with different degrees of profitability. The timing of a project's cash inflows and outflows has a direct affect on the profitability of the project. As a result, close attention has been given to the tax provisions as they apply to costs.

The discounted cash flow is used in each submodule of the OGSM to determine the economic viability of oil and gas projects. Various types of oil and gas projects are evaluated using the proposed DCF calculation, including single well projects and multi-year investment projects. Revenues generated from the production and sale of co-products also are taken into account.

⁹Each of the write-off schedules give recovered amounts in nominal dollars. Therefore, recovered costs are adjusted for expected inflation to give an amount in expected constant dollars since the DCF calculation is based on constant dollar values for all other variables.

The DCF routine requires important assumptions, such as costs and tax provisions. Drilling costs, lease equipment costs, operating costs, and other capital costs are integral components of the discounted cash flow analysis. The default tax provisions applied to the costs follow those used by independent producers. Also, the decision to invest does not reflect a firm's comprehensive tax plan that achieves aggregate tax benefits that would not accrue to the particular project under consideration.

Appendix 3B. Unconventional Gas Recovery Supply Submodule

INTRODUCTION

The UGRSS is the unconventional gas component of the EIA's Oil and Gas Supply Module (OGSM), one component of EIA's National Energy Modeling System (NEMS). The UGRSS is a play level model that specifically analyzes the three major unconventional resources - coalbed methane, tight gas sands, and gas shales. This appendix describes the UGRSS in detail. The following major topics are presented concerning the model:

- Model purpose
- Model overview and rationale
- Model structure
- Data sources


The first section discusses the purpose of the UGRSS. The second section explains the rationale for developing the UGRSS, and how the model allows OGSM to address various issues associated with unconventional natural gas exploration and production. The third section discusses the actual modeling structure in detail. The fourth section discusses the data sources for the model. In this section the unconventional gas resource base is presented in detail with the underlying assumptions..

MODEL PURPOSE

The Unconventional Gas Recovery Supply Submodule (UGRSS) offers EIA the ability to analyze the unconventional gas resource base and its potential for future economic production under differing technological circumstances. The UGRSS was built exogenously from the National Energy Modeling System (NEMS) but now functions as a submodule within the NEMS Oil and Gas Supply Module (OGSM).

Figure 3B-1

UGRSS Interfaces with EIA/NEMS Modules

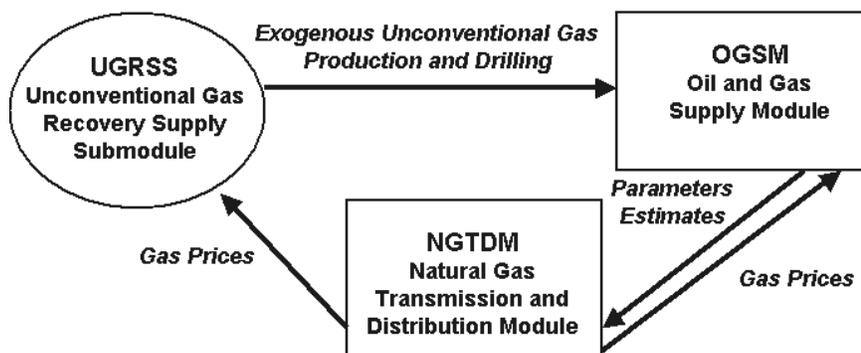

The UGRSS uses pricing data from EIA's NGTDM, resource data from the USGS's 1995 National Assessment¹, and cost data from various sources including the API's JAS. An illustration of how the UGRSS interfaces with the EIA/NEMS energy modules is shown in Figure 3B-1.

Unconventional natural gas -- natural gas from coal seams, natural gas from organic shales, and natural gas from tight sands -- was thought of as an "interesting concept" or "scientific curiosity" not long ago. To spur interest in the development of unconventional gas, the U.S. Government offered tax credits (Section 29) for any operator attempting to develop this type of resource. Indeed, this did interest many operators and unconventional gas resources began to be developed. Through research and development (R&D), individual technology was developed to enable unconventional resources to be economically developed and placed on production. These technologies began to be applied in different regional settings yielding successful results.

Today, according to the USGS's 1995 National Assessment, unconventional gas represents the largest onshore technically recoverable natural gas resource (Table 3B-1). Figures 3B-2 through 3B-4 illustrate the current basins in which each type of resource exists. Since 1992, production in each unconventional gas resource has increased and in 1996 unconventional gas made up 20 percent of natural gas production and 30 percent of natural gas reserves in the United States. The increase in the contribution of unconventional natural gas to the U.S. production and reserve baseline is apparent and growing. This fact makes the capability to understand the present unconventional gas resource base and the ability to predict future energy scenarios involving unconventional gas an invaluable element in future DOE/EIA energy modeling.

Prior to the development of the new UGRSS, the estimates of unconventional gas production in the Annual Energy Outlook (AEO) were based on the results of econometric equations. OGSM forecasted representative drilling costs and drilling activities (wells) by region and resource type, including unconventional gas. Based on historical trends in reserve additions per well and a series of discovery process equations, these projected drilling levels generated reserve additions, and thereby production, for each resource type. This approach is somewhat limited when applied to unconventional gas, however. Because significant exploration and development in this resource has been realized only recently, there exists minimal historical activity to effectively establish a trend from which to extrapolate into the future. Furthermore, technological changes have substantially changed the productivity and economics of this resource area in recent years. Consequently, the development of a specialized, geology and engineering based unconventional gas model that accounts for technological advances was deemed necessary.

¹"1995 National Assessment of United States Oil and Gas Resources," U.S. Geological Survey, National Oil and Gas Resource Assessment Team, U.S. Geological Survey Circular 1118, (1995)

Table 3B-1. USGS 1995 National Assessment

Background


- The 1995 National Assessment of U.S. Oil and Gas Resources by the USGS established unconventional gas (continuous-type deposits) as the largest undiscovered onshore technically recoverable natural gas resource:

-- <u>Continuous-Type Deposits</u>	358 Tcf
- CBM	(50 Tcf)
- Gas Shales	(49 Tcf)
- Tight Sands*	(260 Tcf)
-- <u>Reserve Growth</u>	322 Tcf
-- Undiscovered Conventional Resources	259 Tcf

*Includes low permeability chalks


- Significantly, the 1995 Assessment did not quantitatively assess many large, already producing unconventional gas deposits, such as:
 - Wind River Basin, Tertiary and Upper Cretaceous Tight Sands
 - Fort Worth Basin, Barnett Shale
 - Green River Basin, Deep Coalbed Methane

Figure 3B-2: U.S. Lower 48 Coalbed Methane Basins

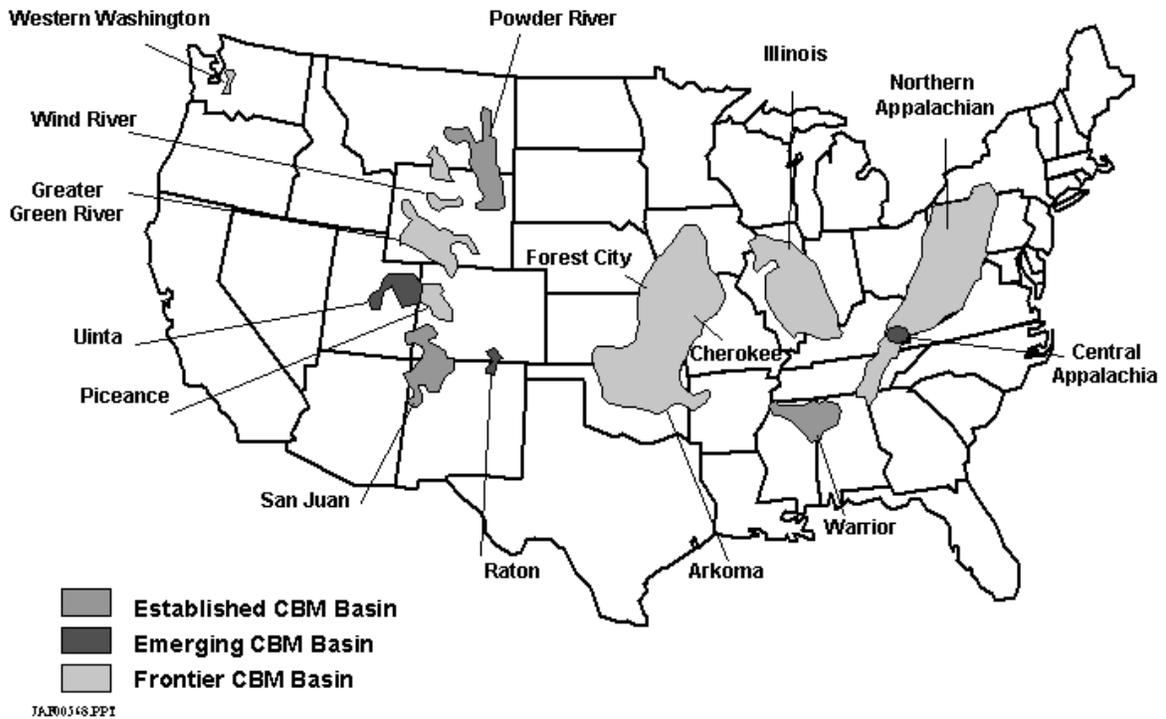

Source: Advanced Resources, International


Figure 3B-3: U.S. Lower 48 Tight Gas Basins

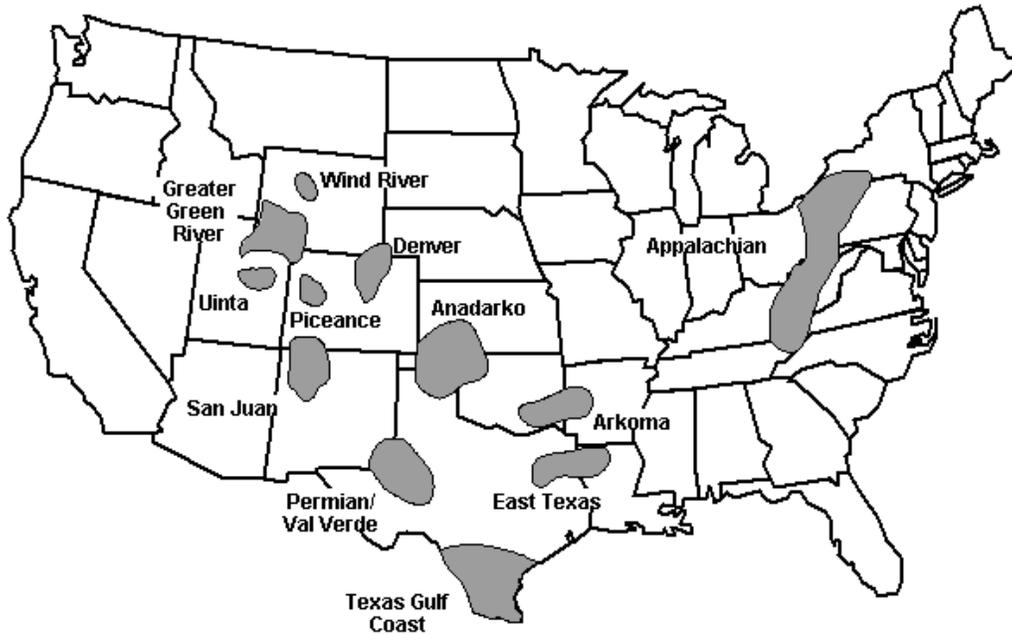

JAR00548.PPT

Source: Advanced Resources, International

Figure 3B-4: U.S. Lower 48 Gas Shale Basins

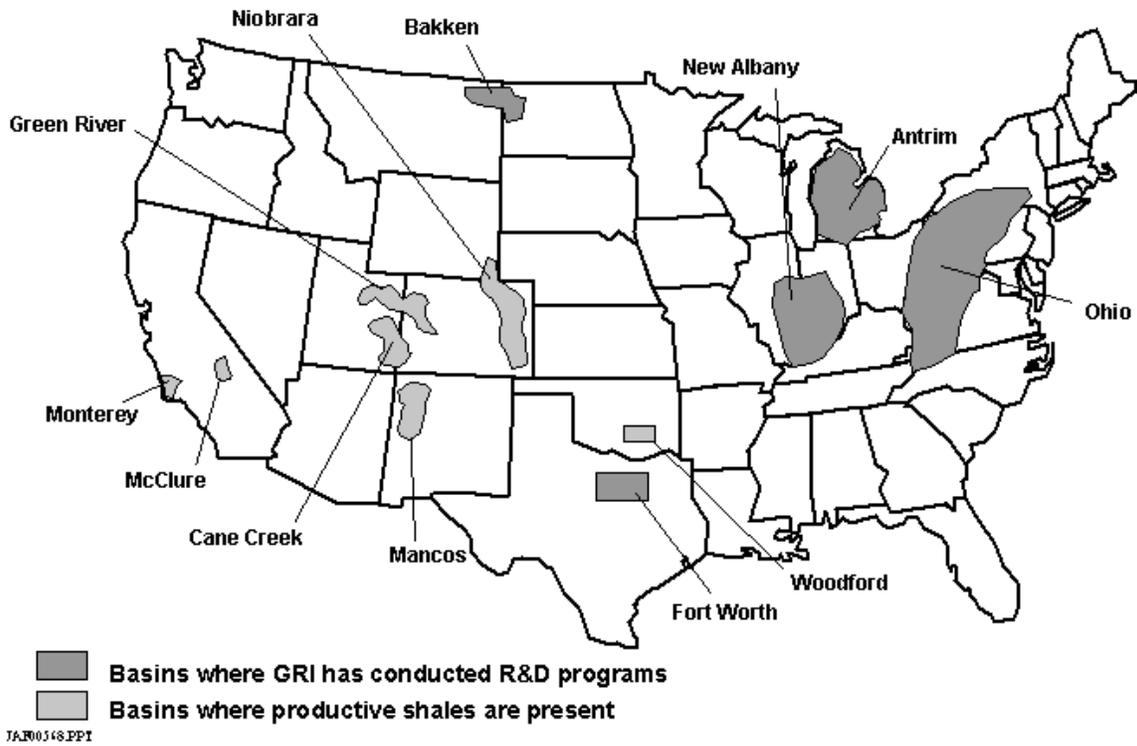


Source: Advanced Resources, International

MODEL OVERVIEW & RATIONALE

The growth of unconventional gas activities in the recent past has been so significant that DOE/EIA needed a better understanding of the quantity of unconventional resources and the technologies associated with its production. Figures 3B-5 and 3B-6 and Table 3B-7 illustrate growth in coalbed methane, tight gas and gas shales production. By 1996, unconventional gas made up 20 percent of US natural gas production and 30 percent of US natural gas reserves. Much of this growth can be attributed to technological advances from R&D in unconventional gas supported by the DOE, the Gas Research Institute (GRI), and industry in the late 1980's and early 1990's.

The USGS included unconventional natural gas in their 1995 National Assessment. However, their estimates did not take into account future changes in technologies effecting unconventional gas. Because much of the unconventional gas resource is “technology constrained” rather than “resource constrained,” it is important to quantify the existing unconventional gas resource base and explore the technologies that are needed to enhance the development of unconventional natural gas. The UGRSS incorporates the effect of different technologies in different forward-looking scenarios to quantify the future of unconventional gas.

Figure 3B-5 Growth in Coalbed Methane Wells and Production

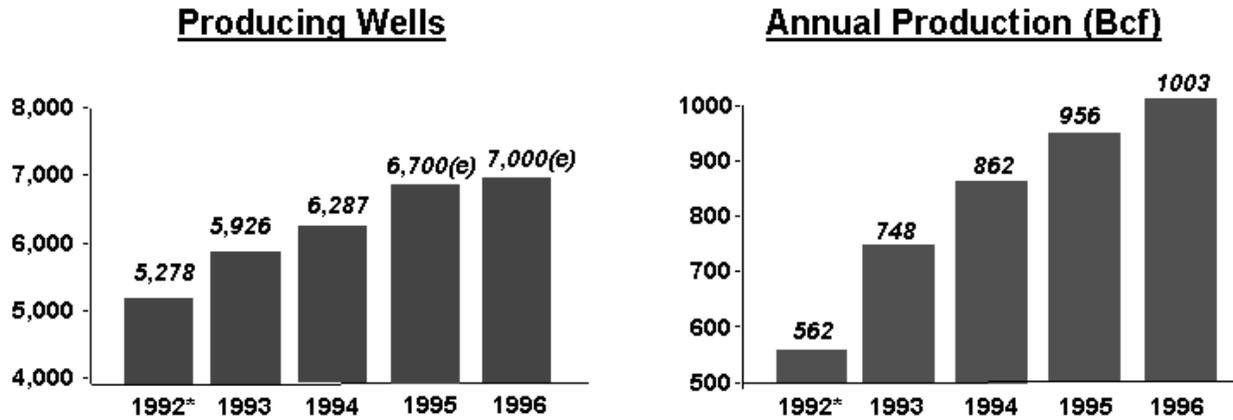


*1992 was the end of the Sec. 29 tax credit.

Source: Advanced Resources, International

Figure 3B-6

Gas Shales Production and Well Completions

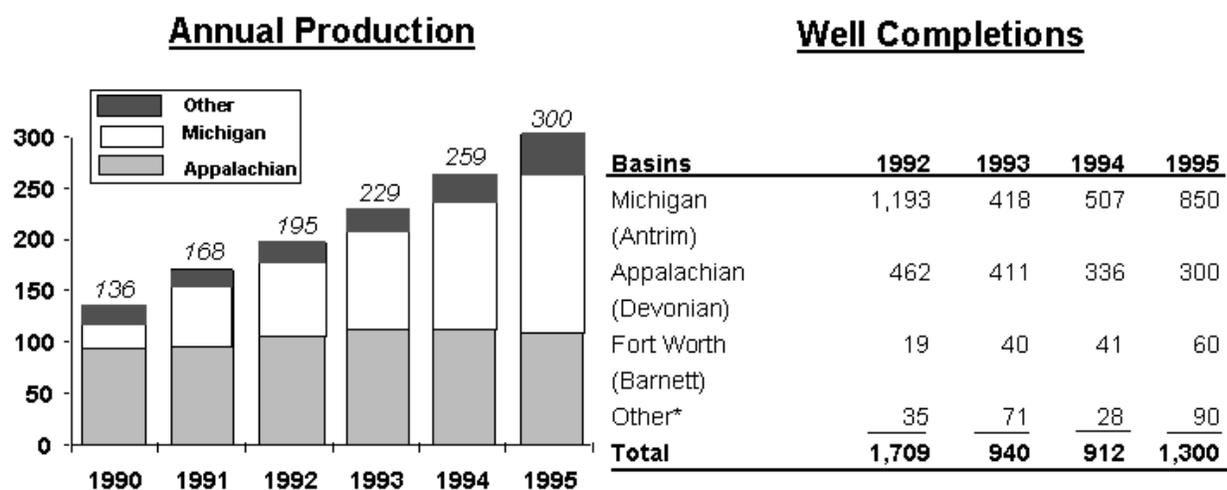

*Illinois (New Albany) and Denver (Niobrara).

Source: Advanced Resources, International

Table 3B-2

Tight Gas Production -- 1992-1996

<u>Basins/Regions</u>	<u>Annual Production (Bcf)</u>				
	<u>1992</u>	<u>1993</u>	<u>1994</u>	<u>1995</u>	<u>1996</u>
Arkla	48	51	52	50	50
East Texas	339	365	370	370	370
Texas Gulf Coast	435	468	474	500	520
Wind River	11	11	11	20	30
Green River	231	295	335	327	360
Denver	71	76	77	75	75
Uinta	35	66	59	56	60
Piceance	31	33	34	32	41
Anadarko	213	230	232	220	220
Permian Basin	235	253	255	260	260
San Juan	321	350	342	330	340
Williston	8	8	8	8	20
Appalachian	419	396	396	390	397
TOTALS	2,397	2,603	2,645	2,638	2,743

Source: Advanced Resources, International

DATA SOURCES

The UGRSS borrows much of its resource data from the USGS's 1995 National Assessment. (Advanced Resources International (ARI) prepared much of the resources assessment for coalbed methane within that study). Another source for unconventional gas resource data was ARI's own internal database. The UGRSS incorporates all of the USGS designated continuous-type plays into the model structure (continuous-type deposits is the USGS term for unconventional gas) and adds some frontier plays that were not quantitatively assessed by the USGS. Because of the geologic and engineering base for the model's structure, many ARI internal basin and play level evaluations, reservoir simulations and history-matching based well performances were included to modify the existing data. Further refinements to some of the estimated ultimate recoveries (EUR's) per well, a key component in deriving resource estimates, were provided by an independent expert reviewer, Harry Vidas of Energy and Environmental Analysis, Inc. These modifications provide the UGRSS with up-to-date and expert resource evaluation to base its future projections upon. Detailed UGRSS resource tables with resources broken down by component are provided in Tables 3B-3 to 3B-5.

The estimates used for current and expected activity in production and reserves within the UGRSS were derived from in-depth analysis of State survey data, industry inputs, Petroleum Information /Dwights Energy Data (PI/Dwights) completion and production records and EIA's annual reserves report. These data are linked to the NEMS historic accounting module.

The data concerning costs and economics were developed by ARI from extensive work with industry producers in tight gas, coalbed methane and gas shale basins, plus the API's JAS. These data are also linked to the main NEMS price module.

The determinations of how technology will affect the model, the timing of these technology impacts and current and future environmental constraints are the significant variables that determine the output of the UGRSS. These variables were developed by ARI to incorporate R&D programs being conducted by the DOE, GRI and industry that lead to significant technology progress. These variables will each be explained in detail in Appendix 3-c.

Drilling allocations establish a pace of well drilling for economically feasible gas plays based on relative profitability and associated drilling schedules. The baseline data and these determinations are linked to the other drilling projections within OGSM.

The model outputs to be incorporated into EIA's AEO are: annual production, drilling and reserves, by OGSM regions. These outputs are linked to NEMS integrating module and output reports.

Table 3B-3. Tight Sands Resource Base: Detailed Breakdown

Play #	Basin/Play	A	B	C	D	E	F	G	H	I	J	K	L
		Basin Area (Square Miles)	Developed Cells (Wells Drilled thru 1/1/1996)	Wells per Square Mile	Estimated Ultimate Recovery (Bcf/Well)	Success Rate	Play Probability	Official No Access	Undev'd. Resources 1/1/1996 (Bcf)	Inferred Reserves 1/1/1996 (Bcf)	Unproved Resources 1/1/1996 (Bcf)	Adj.'s for Tech. (+) & Dev.(-) (Bcf)	Unproved Resources 1/1/2002 (Bcf)
H = (A*C-B)*D*E*F*(1-G)										J=H+I		L=J+K	
Uinta Basin													
1	Tertiary East	450	989	16	1.40	88%	100%	17%	6351	142	6493	511	7004
2	Tertiary West	150	6	8	1.20	60%	100%	56%	375	0	375	503	878
3	Basin Flank Mesaverde	1500	43	4	1.20	70%	100%	34%	3320	1	3321	1798	5119
4	Deep Synclinal Mesaverde	800	14	4	1.60	50%	50%	2%	1249	0	1249	79	1328
Wind River Basin													
5	Fort Union/Lance Shallow	1500	102	4	3.50	80%	100%	0%	16514	-84	16430	-197	16233
6	Mesaverde/Frontier Shallow	250	113	4	2.50	75%	100%	0%	1663	76	1739	-65	1674
7	Fort Union/Lance Deep	2500	0	4	4.00	50%	80%	9%	14560	0	14560	602	15162
8	Mesaverde/Frontier Deep	250	0	4	5.00	50%	50%	9%	1138	0	1138	32	1169
Appalachian Basin													
9	Clinton/Medina High	2000	8336	10	0.30	95%	100%	0%	3324	325	3649	-655	2994
10	Clinton/Medina Moderate	6000	2382	8	0.20	60%	100%	0%	5474	0	5474	221	5695
11	Clinton/Medina Low	10000	0	8	0.08	50%	75%	0%	2400	0	2400	649	3049
12	Upper Devonian High	4000	50210	16	0.26	85%	100%	0%	3048	1277	4325	-1003	3322
13	Upper Devonian Moderate	7000	41142	8	0.10	50%	100%	0%	743	0	743	80	823
14	Upper Devonian Low	10000	0	8	0.07	30%	75%	0%	1260	0	1260	576	1836
Denver Basin													
15	Deep J Sandstone	1800	1920	8	0.60	80%	100%	2%	5865	266	6131	-570	5561
Greater Green River Basin													
16	Fort Union	400	190	8	1.00	70%	80%	0%	1686	0	1686	-442	1244
17	Fox Hills/Lance	1500	211	8	4.00	75%	100%	5%	33472	23	33495	-320	33175
18	Lewis	1500	399	4	2.00	80%	100%	0%	8962	-57	8905	-438	8467
19	Shallow Mesaverde	2000	1516	8	1.80	80%	100%	2%	20481	469	20950	-1304	19646
20	Deep Mesaverde	3000	0	8	2.40	50%	75%	4%	20631	0	20631	1209	21840
21	Frontier (Moxa Arch)	1000	2130	8	1.50	85%	100%	18%	6172	2171	8343	-1122	7221
22	Frontier (Deep)	7500	0	4	3.10	50%	75%	4%	33623	0	33623	928	34551
Piceance Basin													
23	South Basin Williams Fork/Mesaverde	1250	500	10	0.78	80%	100%	9%	6828	135	6963	446	7409
24	North Basin Williams Fork/Mesaverde	1250	0	4	0.78	70%	100%	2%	2677	38	2715	53	2768
25	Iles/Mesaverde	2500	165	4	0.60	55%	100%	4%	3120	38	3158	173	3331

Table 3B-3. Tight Sands Resource Base: Detailed Breakdown (Continued)

Play #	Basin/Play	A	B	C	D	E	F	G	H	I	J	K	L		
		Basin Area (Square Miles)	Developed Cells (Wells Drilled thru 1/1/1996)	Wells per Square Mile	Estimated Ultimate Recovery (Bcf/Well)	Success Rate	Play Probability	Official No Access	Undev'd. Resources 1/1/1996 (Bcf)	Inferred Reserves 1/1/1996 (Bcf)	Unproved Resources 1/1/1996 (Bcf)	Adj.'s for Tech. (+) & Dev.(-) (Bcf)	Unproved Resources 1/1/2002 (Bcf)		
									H = (A*C-B)*D*E*F*(1-G)			J=H+I		L=J+K	
LA / MS Salt Basin															
26	Cotton Valley	2700	432	8	2.00	85%	100%	0%	35986	1174	37160	-2811	34349		
Arkoma Basin															
27	Arkoma	800	1707	8	1.00	80%	100%	0%	3754	-17	3737	30	3767		
San Juan Basin															
28	Picture Cliffs	3492	6759	4	0.71	60%	100%	1%	3041	301	3342	-291	3051		
29	Central Basin/Mesaverde	2610	7157	8	1.90	70%	100%	1%	18071	1802	19873	-3354	16519		
30	Central Basin/Dakota	3420	5180	4	0.97	75%	100%	1%	6122	914	7036	-938	6098		
Northern Great Plains Basin															
31	High Potential	2000	2443	4	0.50	75%	100%	4%	2001	76	2077	-202	1875		
32	Moderate Potential	20000	200	4	0.40	50%	80%	4%	12257	0	12257	519	12776		
33	Low Potential	30000	83	4	0.25	30%	75%	1%	6678	0	6678	338	7016		
Columbia Basin															
34	Basin Centered.	1500	0	8	1.50	70%	50%	0%	6300	0	6300	232	6532		
Anadarko Basin															
35	Cleveland	2000	1869	4	0.78	70%	100%	0%	3348	183	3531	-189	3342		
36	Cherokee/Redfork	1500	2651	4	0.78	86%	100%	0%	2247	524	2771	-616	2155		
37	Granite Wash/Atoka	1500	476	4	0.78	80%	100%	0%	3447	257	3704	-257	3447		
Texas Gulf Basin															
38	Vicksburg	600	470	8	3.00	75%	100%	0%	9743	58	9801	-1267	8534		
39	Wilcox/Lobo	1500	3048	8	2.00	80%	100%	0%	14323	578	14901	-1709	13192		
40	Olmos	2500	498	4	0.40	75%	100%	0%	2851	467	3318	-567	2751		
Permian Basin															
41	Canyon	6000	11562	4	0.59	70%	100%	0%	5137	15	5152	-388	4764		
42	Abo	1500	2929	4	0.50	75%	100%	0%	1152	517	1669	-999	670		

Source: Advanced Resources, International

Table 3B-4. Gas Shales Resource Base: Detailed Breakdown

Play #	Basin/Play	A	B	C	D	E	F	G	H	I	J	K	L		
		Basin Area (Square Miles)	Developed Cells (Wells Drilled thru 1/1/1996)	Wells per Square Mile	Estimated Ultimate Recovery (Bcf/Well)	Success Rate	Play Probability	Official No Access	Undev'd. Resources 1/1/1996 (Bcf)	Inferred Reserves 1/1/1996 (Bcf)	Unproved Resources 1/1/1996 (Bcf)	Adj.'s for Tech. (+) & Dev.(-) (Bcf)	Unproved Resources 1/1/2002 (Bcf)		
									H = (A*C-B)*D*E*(1-G)			J=H+I		L=J+K	
Appalachian Basin															
1	Big Sandy Central	8800	8344	4	0.40	85%	100%	0%	9131	1082	10213	-978	9235		
2	Big Sandy Extension	7000	10658	4	0.25	85%	100%	0%	3685	268	3953	-26	3927		
3	Greater Silstone Area	5000	4600	8	0.10	80%	100%	0%	2832	0	2832	290	3122		
4	Low Thermal Maturity	14000	3500	4	0.12	70%	80%	0%	3528	0	3528	137	3665		
Michigan Basin															
5	Antrim - Developing Area	2000	7197	8	0.50	95%	100%	0%	4181	1267	5448	-464	4984		
6	Antrim - Undeveloped Area	8000	0	8	0.30	50%	80%	0%	7680	0	7680	366	8046		
Illinois Basin															
7	Illinois New Albany - Developing Area	5000	134	4	0.25	50%	80%	0%	1987	0	1987	80	2067		
Cincinnati Basin															
8	Cincinnati Arch - Devonian Shales	12000	0	4	0.12	50%	50%	0%	1440	0	1440	61	1501		
Williston Basin															
9	Williston - Shallow Niobraran	30000	0	2	0.10	35%	75%	4%	1512	0	1512	171	1683		
Fort Worth-Barnett Basin															
10	Fort Worth-Barnett - Main Area	2100	411	8	1.00	85%	100%	0%	13931	195	14126	1370	15496		

Source: Advanced Resources, International

Table 3B-5. Coalbed Methane Resource Base: Detailed Breakdown

Play #	Basin/Play	A	B	C	D	E	F	G	H	I	J	K	L
		Basin Area (Square Miles)	Developed Cells (Wells Drilled thru 1/1/1996)	Wells per Square Mile	Estimated Ultimate Recovery (Bcf/Well)	Success Rate	Play Probability	Official No Access	Undev'd. Resources 1/1/1996 (Bcf)	Inferred Reserves 1/1/1996 (Bcf)	Unproved Resources 1/1/1996 (Bcf)	Adj.'s for Tech. (+) & Dev.(-) (Bcf)	Unproved Resources 1/1/2002 (Bcf)
Uinta Basin (UB)													
1	Ferron	400	100	8	2.00	90%	100%	6.1%	5242	255	5497	-481	5016
2	Blackhawk	586	40	4	0.80	70%	100%	28.4%	923	0	923	27	950
3	Sego	534	0	4	1.70	25%	80%	27.7%	525	0	525	31	556
Raton Basin (RB)													
4	Northern Raton Basin	200	13	4	0.90	60%	100%	0.0%	425	0	425	-19	406
5	Raton Basin Purgatoire River	550	82	8	0.90	90%	100%	0.0%	3498	74	3572	-353	3219
6	Southern Raton Basin	386	36	4	0.90	90%	100%	2.0%	1197	0	1197	-28	1169
Powder River Basin (PRB)													
7	Shallow Mining-Related	5700	1498	10	0.25	95%	100%	8.1%	12107	81	12188	-1225	10963
8	Central Basin	3700	11	8	0.70	80%	100%	1.6%	16305	0	16305	253	16558
Appalachian Basin (AB)													
9	Central AB - Central Basin	950	675	8	0.60	90%	100%	0.0%	3740	794	4534	-1030	3504
10	Northern AB - Shallow	2056	34	8	0.20	50%	100%	0.0%	1641	0	1641	53	1694
11	Northern AB - Deep	6000	0	8	0.25	50%	55%	0.0%	3300	0	3300	172	3472
Black Warrior Basin (BWB)													
12	Central Basin	700	0	8	0.16	50%	50%	0.0%	224	0	224	9	233
13	Shallow	1000	3500	8	0.55	95%	100%	0.0%	2351	653	3004	-461	2543
Greater Green River Basin (GGRB)													
14	Shallow	3200	17	4	0.28	50%	100%	10.4%	1603	0	1603	64	1667
15	Deep	5000	0	4	0.28	30%	50%	17.6%	692	0	692	37	729
Piceance Basin (PB)													
16	Divide Creek	263	11	8	0.39	60%	100%	2.1%	480	0	480	13	493
17	White River Dome	200	23	4	0.39	80%	100%	1.4%	239	0	239	5	244
18	Shallow	2000	62	4	0.39	70%	100%	15.6%	1829	0	1829	73	1902
19	Deep	2000	0	4	0.39	30%	80%	8.1%	688	0	688	33	721
Midcontinent Basin (MB)													
20	Midcontinent - Forest City & Arkoma	2250	0	8	0.20	80%	80%	0.0%	2304	0	2304	87	2391
21	Midcontinent - Cherokee & Arkoma	2750	520	8	0.20	40%	100%	0.0%	1718	100	1818	36	1854
Cahaba Basin (CB)													
22	Cahaba Basin	387	204	8	0.55	60%	100%	0.0%	954	0	954	42	996

$$H = (A * C - B) * D * E * F * (1 - G)$$

$$J = H + I$$

$$L = J + K$$

Table 3B-5. Coalbed Methane Resource Base: Detailed Breakdown (Continued)

Play #	Basin/Play	A	B	C	D	E	F	G	H	I	J	K	L
		Basin Area (Square Miles)	Developed Cells (Wells Drilled thru 1/1/1996)	Wells per Square Mile	Estimated Ultimate Recovery (Bcf/Well)	Success Rate	Play Probability	Official No Access	Undev'd. Resources 1/1/1996 (Bcf)	Inferred Reserves 1/1/1996 (Bcf)	Unproved Resources 1/1/1996 (Bcf)	Adj.'s for Tech. (+) & Dev.(-) (Bcf)	Unproved Resources 1/1/2002 (Bcf)
									H = (A*C-B)*D*E*F*(1-G)		J=H+I		L=J+K
	Illinois Basin (IB)												
23	Illinois Basin	1214	4	8	0.24	25%	100%	0.0%	582	0	582	32	614
	San Juan Basin (SJB)												
24	Northern SJB - Colorado	780	520	4	1.90	90%	100%	0.0%	4445	525	4970	-421	4549
25	Fruitland SJB - New Mexico & Colorado	670	1200	4	7.00	90%	100%	4.1%	8939	4651	13590	-5723	7867
26	Western SJB - New Mexico	2060	880	2	0.90	80%	100%	1.8%	2290	443	2733	-80	2653
27	Eastern SJB - New Mexico	1190	320	2	0.70	80%	100%	0.0%	1153	117	1270	4	1274
28	Southern SJB - New Mexico (Menefee)	3000	0	2	0.40	35%	50%	7.0%	391	0	391	18	409

Source: Advanced Resources, International


UGRSS MODEL STRUCTURE

INTRODUCTION

The UGRSS was developed offline from EIA's mainframe OGSM as a standalone model entitled Model of Unconventional Gas Supply (MUGS). It was then programmed as a submodule of the OGSM. A methodology was developed within OGSM to enable it to readily import and manipulate the UGRSS output, which consists essentially of detailed production/reserve/drilling tables disaggregated by the 17 regions within the Natural Gas Transmission and Distribution Module (NGTDM) and by the 6 onshore regions of the OGSM.

The general process flow diagram for the UGRSS is provided in Figure 3B-7. Within each of the 6 Lower-48 State regions, as defined by OGSM; reservoir, cost and technology information were collected to analyze the economics of producing unconventional gas. The UGRSS utilizes price information received from the NGTDM via the OGSM to generate reserve additions and production response based on economic and supply potential.

Figure 3B-7. UGRSS General Process Flow Diagram

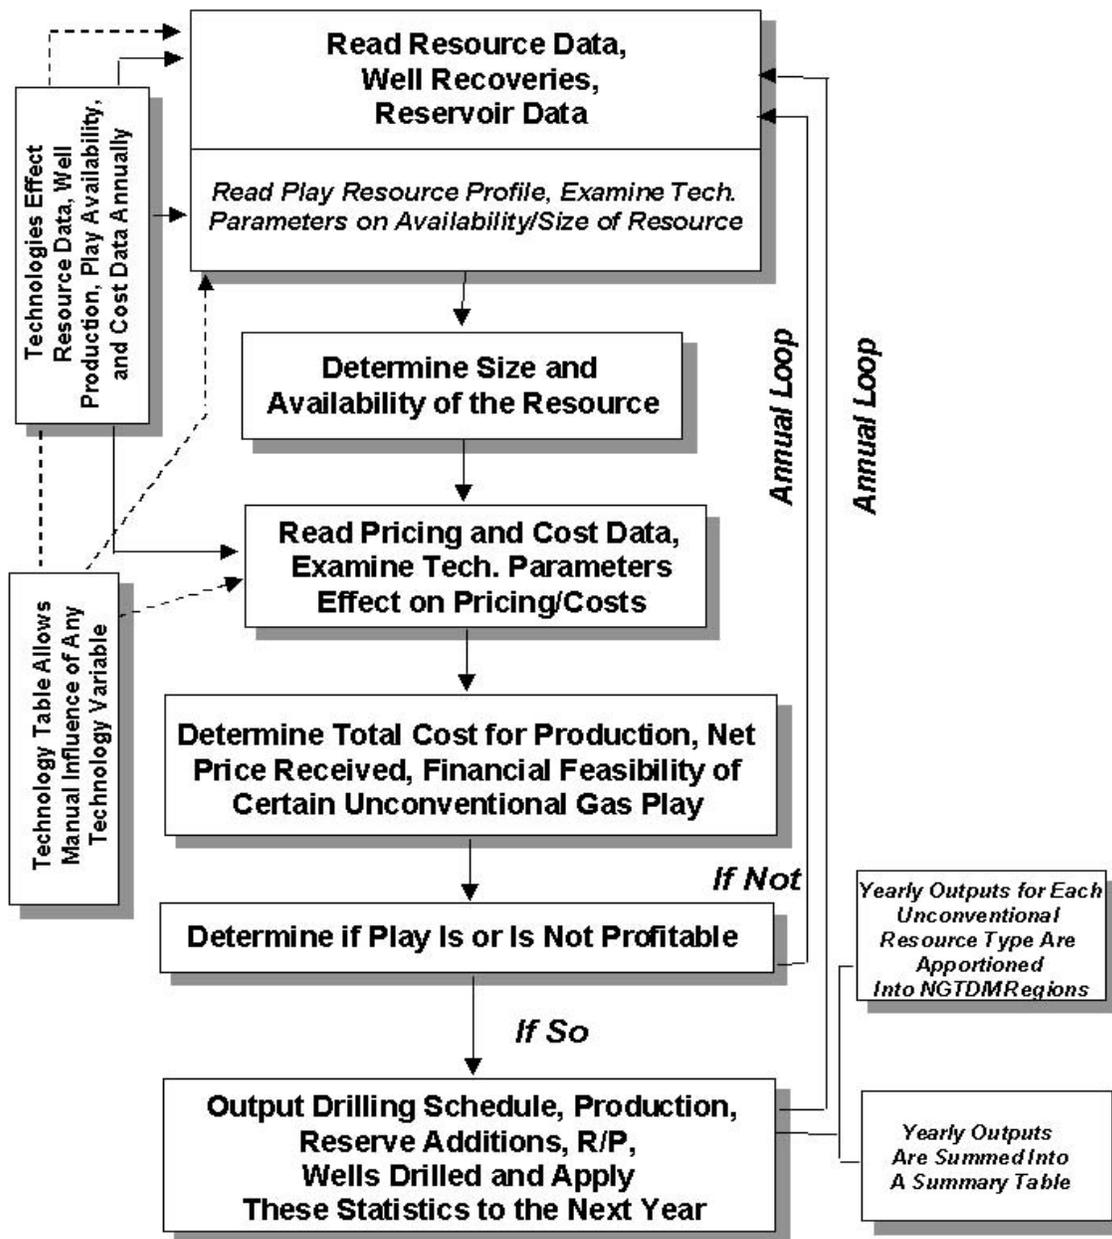

TREATMENT OF ACCESS RESTRICTIONS

A current issue with respect to natural gas development concerns the ability of producers to access natural gas resources on Federal lands. Most of the unconventional gas resources are in the Rocky Mountains, and these resources are subject to a variety of access restrictions. For 5 major basins in the Rocky Mountains an inter-agency assessment of access restrictions was conducted in 2002 by the Federal government under the authority of the Energy Policy and Conservation Act (EPCA)². The access assumptions for the Rocky Mountains in the *Annual Energy Outlook 2004* (AEO2004) reflect the results of the EPCA assessment. In this regard 7 percent of the undeveloped unconventional gas resources are officially off limits to either drilling or surface occupancy (Table 5). Included in this category are those areas where drilling is precluded by statute (e.g., national parks and wilderness areas) and by administrative decree (e.g., “Wilderness Re-inventoried Areas”, “Roadless Areas”). Also included are those areas of a lease where surface occupancy is prohibited by stipulation to protect identified resources such as the habitats of endangered species of plants and animals. An additional 26 percent of the resources are judged to be currently developmentally constrained because of the prohibitive effect of compliance with environmental and pipeline regulations created to effect such laws as the National Historic Preservation Act, the National Environmental Policy Act, the Endangered Species Act, the Air Quality Act, and the Clean Water Act. Approximately 15 percent of the resources are accessible, but located in areas where lease stipulations, which affect accessibility, are set by a federal land management agency, either the U.S. Bureau of Land Management or the U.S. Forest Service. The remaining 53 percent of undeveloped Rocky Mountain unconventional gas resources are located either on Federal land without lease stipulations or on private land and are accessible subject to standard lease terms (i.e., no lease stipulations).

The treatment of access restrictions in the AEO2004 varies by restriction category. Resources that are located on land that is officially inaccessible are removed from the model’s operative resource base. Resources located in areas that are developmentally constrained because of environmental and pipeline regulations are initially removed from the model’s resource base but are made available gradually over the forecast period to reflect the tendency of technological progress to enhance industry’s ability to overcome difficulties in complying with these types of restrictions. Resources that are accessible but located in areas that are subject to lease stipulated access limitations are accounted for by two adjustments. Exploration and development costs are increased by a given amount to reflect the increased costs that these access restrictions generally add to a project. Additionally, time is added to complete a project in these areas to simulate the delay usually incurred as a result of efforts to comply with the access restrictions.

² The following basins (study areas) were reassessed by the USGS as part of a Federal interagency study of access restrictions in the Rocky Mountains: the Paradox/San Juan, the Uinta/Piceance, the Greater Green River, the Powder River, and the Montana Thrust Belt. The study, *Scientific Inventory of Onshore Federal Land’s Oil and Gas Resources and Reserves and the Extent and Nature of Restrictions or Impediments to their Development* (January 2003), was conducted under the authority of the Energy Policy and Conservation Act (EPCA).

RESOURCE BASE

Advanced Resources International (ARI) incorporated much of the resource information used in the UGRSS from the 1995 USGS United States Oil and Gas Resource Assessment. ARI also used the NPC and its own studies as reference data to track historical unconventional resource data and to illustrate how the outlook concerning unconventional gas has changed over the last 10 years. After analyzing these studies, ARI chose the specific basins and plays it viewed as important producing or potential unconventional gas areas. Some of these plays included in the UGRSS were not quantitatively assessed in the USGS study. These plays include the deep coalbed methane in the Green River Basin, the Barnett Shale of the Fort Worth Basin, and the Tertiary-age and Upper Cretaceous-age tight sands of the Wind River Basin. For these resource estimates, ARI gathered basin and play information from expert sources and added these specific plays to the resource base.

The resource base is established in the first year of the UGRSS and is built upon in each year to produce model outputs. The underlying resource base does not change but it is affected specifically by technology. The static resource base elements and the definitions are presented here:

PNUM =	Play Number: The play number established by ARI
BASLOC =	Basin Location: The basin and play name
BASAR =	Basin Area: Area in square miles
DEV_CEL =	Developed Cells: Number of locations already drilled
WSPAC_CT =	Well Spacing - Current Technology: Current spacing in acres
WSPAC_AT =	Well Spacing - Advanced Technology: Spacing in acres under Advanced Technology
SZONE =	Stimulation Zones: Number of times a single well is stimulated in the play
AVGDEPTH =	Average Depth: Average depth of the play
NOACCESS =	Percentage of the undrilled locations that are officially inaccessible due to Federal statute or administrative decree (Note: For "EPCA" plays, plays in basins studied in the EPCA assessment ³ , this variable represents only those areas off limits due to Federal statute)

CTUL = Legally accessible undrilled Locations - Current Technology: Current number of locations legally accessible and available to drill

$$\text{CTUL} = ((\text{BASAR} * \text{WSPAC_CT}) - (\text{DEV_CEL})) * (1 - \text{NOACCESS}) \quad (1)$$

ATUL = Legally accessible undrilled Locations - Advanced Technology: Number of locations legally accessible and available to drill under advanced technology

$$\text{ATUL} = ((\text{BASAR} * \text{WSPAC_AT}) - (\text{DEV_CEL})) * (1 - \text{NOACCESS}) \quad (2)$$

³Ibid.

WELL PRODUCTIVITY

This section of the unconventional gas model concerns well productivity. The Estimated Ultimate Recovery (EUR) numbers were taken directly (with some modifications) from the USGS 1995 Assessment. ARI placed the base case year estimates in as hard-wire figures and then extrapolated these figures throughout the model as formulas. For future years, much of the input resource and production numbers in the UGRSS are derived from equations. Year 1 includes many actual measured values because they offer a base of historic information from which to forecast. Each is noted in this documentation and the actual number and forecast equation are described.

The EUR's of the potential wells to be drilled in areas that are thought in a given year to be the best 30 percent (in terms of productivity), middle 30 percent, and worst 40 percent, respectively, of a basin are based on weighted averages of the true EUR's for the best 10 percent, next best 20 percent, middle 30 percent, and worst 40 percent of the basin. The weights reflect the degree to which the driller is able to ascertain a complete understanding of the basin's structure.

The actual EUR's for the basin are represented as follows.

RW10 ₁ =	Reserves per Well for the best 10 percent of the play (year 1): an EUR estimate
RW20 ₁ =	Reserves per Well for the next (lesser) 20 percent of the play (year 1): an EUR estimate
RW30 ₁ =	Reserves per Well for the next (lesser) 30 percent of the play (year 1): an EUR estimate
RW40 ₁ =	Reserves per Well for the worst 40 percent of the play (year 1): an EUR estimate

Variables representing the EUR's of the potential wells to be drilled in a given year are shown below. Note that the EUR's of all three qualitative categories of wells (best 30 percent, middle 30 percent, and worst 40 percent) are equal in the first year. This reflects the relatively random nature of drilling decisions early in the basin's developmental history. As will be shown, these respective EUR's evolve as information accumulates and technology advances, enabling drillers to more effectively locate the best prospective areas of the basin.

For Year 1:

MEUR_{1,1} = A weighted average for the EUR values for each (entire) basin

MEUR _{1,1}	=	(0.10*RW10 ₁)+(0.20*RW20 ₁)+(0.30*RW30 ₁)+(0.40*RW40 ₁)	(3)
---------------------	---	---	-----

MEUR_{1,2} = A weighted average for the best 30 percent of the potential wells in the basin

MEUR_{1,2} = (0.10*RW10₁)+(0.20*RW20₁)+(0.30*RW30₁)+(0.40*RW40₁)

MEUR_{1,3} = A weighted average for the middle 30 percent of the potential wells in the basin

MEUR_{1,3} = (0.10*RW10₁)+(0.20*RW20₁)+(0.30*RW30₁)+(0.40*RW40₁)

$$\begin{aligned} \text{MEUR}_{1,4} &= \text{A weighted average for the worst 40 percent of the potential wells in the basin} \\ \text{MEUR}_{1,4} &= (0.10 * \text{RW}_{10_1}) + (0.20 * \text{RW}_{20_1}) + (0.30 * \text{RW}_{30_1}) + (0.40 * \text{RW}_{40_1}) \end{aligned}$$

Where,

- Subscript 1 = year count, with 1996=1; years = 1,30
- Subscript 2 = basin area
 - 1 = total area of basin
 - 2 = designated “best area” of the basin
 - 3 = designated “average area” of the basin
 - 4 = designated “worst area” of the basin

As mentioned above, the equations change for MEUR after the first year. After Year 1, experience and technology enable the basin to be better understood geologically and from a potential productive aspect. Accordingly, the model gradually high grades each basin into a best, average, and worst area. As the understanding of the basin develops over time and technology advances, the area thought to be the best 30 percent from a drilling prospective moves toward an EUR representative of the best 10 percent and 20 percent of the basin, the average area stays consistent with the middle 30 percent basin EUR value and the area figured to constitute the worst 40 percent of the potential drilling prospects slowly downgrades to the bottom 40 percent basin EUR value. The EUR for the entire basin is also increasing over time due to the effect of technological progress in reducing damage from drilling and stimulation, increasing fracture length and conductivity, and improving pay contact. This process uses the following equations:

MEUR_{1,yr,2} for the best 30 percent of the wells in the basin :

MEUR _{1,yr,2}	=	$\begin{aligned} &(\text{MEUR}_{1,1} + (((((\text{RW}_{10_1} * (1/3)) + (\text{RW}_{20_1} * (2/3)) - \text{MEUR}_{1,2})) / \\ &\text{DEVPER}) * \text{TECHYRS})) * \\ &(1 + \text{TECHYRS} * (\text{REDAM}\% / 20) + \text{TECHYRS} * (\text{FRCLLEN}\% / 20) + \text{TEC} \\ &\text{HYRS} * (\text{PAYCON}\% / 20))) \end{aligned}$	(4)
------------------------	---	--	-----

Where,

- DEVPER = Development period for “Favorable Settings” technological advances
- REDAM% = Total percentage increase over development period due to advances in “Reduced Damage D&S” technology
- FRCLLEN% = Total percentage increase over development period due to advances in “Increased Fracture Length L&C” technology
- PAYCON% = Total percentage increase over development period due to advances in “Improved Pay Contact” technology
- TECHYRS = Number of years (from base year) over which incremental advances in indicated technology have occurred

MEUR_{1,yr,3} for the middle 30 percent of the wells in the basin :

$\text{MEUR1}_{\text{yr},3} = \text{RW30}_{\text{yr}} * (1 + \text{TECHYRS} * (\text{REDAM}\%/20) + \text{TECHYRS} * (\text{FRCLN}\%/20) + \text{TECHYRS} * (\text{PAYCON}\%/20))$	(5)
--	-----

ME

UR1_{yr,4} for the worst 40 percent of the wells in the basin :

$\text{MEUR1}_{\text{yr},4} = \text{MEUR1}_{1,1} - ((\text{RW30}_1 - \text{RW40}_1) / \text{DEVPER}) * \text{TECHYRS} * (1 + \text{TECHYRS} * (\text{REDAM}\%/20) + \text{TECHYRS} * (\text{FRCLN}\%/20) + \text{TECHYRS} * (\text{PAYCON}\%/20))$	(6)
--	-----

NEWCAVFRWY = For Coalbed Methane, establishes whether or not cavitation technology is advanced to the point that “New Cavity Fairways” are developed for the basins geologically favorable for use of this technology.

CAVFRWY% = For Coalbed Methane, total percentage increase in EUR due to development of New Cavity Fairways.

MEUR2 = For Coalbed Methane, “MEUR1” adjusted for technological progress in the development of New Cavity Fairways (explained in more detail in the Technology Section - Appendix 3-c)

$\begin{aligned} \text{MEUR2} &= \text{IF NEWCAVFRWY equal to 1:} \\ &\text{MEUR2} = \text{MEUR1} * (1 + \text{CAVFRWY}\%) \\ &\text{IF NEWCAVFRWY equal to 0:} \\ &\text{MEUR2} = \text{MEUR1} \end{aligned}$	(7)
--	-----

ENCBM = For Coalbed Methane, establishes whether or not enhanced coalbed methane technologies are available to be used in basins in which such technologies are applicable.

ENCBM% = For Enhanced Coalbed Methane, total percentage increase in EUR due to implementation of enhanced coalbed methane technologies.

MEUR3 = For Enhanced Coalbed Methane, “MEUR2” adjusted for technological progress in the commercialization of Enhanced Coalbed Methane (explained in more detail in the Technology Section - Appendix 3-c)

MEUR3	=	IF ENCBM equal to 1: MEUR3 = MEUR2 * (1 + ENCBM%)	(8)
		IF ENCBM not equal to 1: MEUR3 = MEUR2	

- SCSSRT₁ = Success Rate : The ratio of successful wells over total wells drilled (This can also be called the dry hole rate if you use the equation 1 - SCSSRT). Though each of these SCSSRT values is an input value in Year 1, future forecasting turns these inputs into formulas that capture the effects of technology on the resource base. These equations will be explained in the technology section.
- PLPROB = The play probability: Only hypothetical plays have a PLPROB < 100 percent.
- PLPROB2 = The play probability adjusted for technological progress, if initial play probability less than 1
- TRW = The amount of potential wells available regardless of economic feasibility. Though each of these TRW values is an input value in Year 1, future forecasting turns these inputs into formulas that capture the effects of technology on the resource base. These equations will be explained in the technology section.

TRW	=	(ATUL*SCSSRT*PLPROB2)	(9)
-----	---	-----------------------	-----

UNDEV_RES = Undeveloped resources: This formula remains constant throughout the model.

UNDEV_RES	=	(MEUR3*TRW)	(10)
-----------	---	-------------	------

RESNPROD_{iy_r} = Beginning-of-year cumulative proved reserves: This is an input number for Year 1 but changes into the following formula for subsequent years.

RESNPROD _{iy_r}	=	RESNPROD _{iy_{r-1}} +R_ADD _{iy_{r-1}}	(11)
------------------------------------	---	---	------

R_ADD_{iy_{r-1}} = Total Reserve Additions in the previous year.

URR = Ultimate Recoverable Resources: This formula remains constant throughout the model.

$$\text{URR} = (\text{RESNPROD} + \text{UNDEV_RES}) \quad (12)$$

ECONOMICS AND PRICING

The next section of the unconventional gas model focuses on economic and pricing of the different types of unconventional gas. The pricing section involves many variables and is impacted by technology.

DIS_FAC = Discount Factor: This is the discount factor⁴ that is applied to the EUR for each well. The discount factor is based on the Present Value of a production stream from a typical coalbed methane, tight sands, or gas shales well over a 20 year period. The stream is discounted at a rate of 15 percent. Both the production stream and the discount rate are variables that are easily modified.

DISCRES = Discounted Reserves: The mean EUR per well multiplied by the discount factor.

$$\text{DISCRES} = (\text{DIS_FAC} * \text{MEUR3}) \quad (13)$$

WHGP = Wellhead Gas Price: The price stream is a variable provided by EIA. This variable is input for each year.

BASNDIF = Basin Differential: This is a sensitivity on the gas price at a basin level. Depending on their proximity to market and infrastructure, the price varies throughout the country. The numbers are constant throughout the model.

ENPVR = Expected NPV Revenues: Gives the value of the entire discounted production stream for one well in real dollars.

$$\text{ENPVR} = (\text{WHGP} + \text{BASNDIF}) * \text{DISCRES} * 1,000,000 \quad (14)$$

DACC = Drilling and completion costs

⁴The definition for the discount factor is found in the appendix.

DACC =	IF AVGDPTH less than 2000 feet: DACC = AVGDPTH*DCC_L2K+DCC_G&G	(15)
	IF AVGDPTH equal to or greater than 2000 feet: DACC = 2000*DCC_L2K+(AVGDEPTH-2000)*DCC_G2K)+DCC_G&G	

DCC_L2K = Cost per foot, well is less than 2000 feet.
DCC_G2K = Cost per foot, well is greater than 2000 feet.
DCC_G&G = Land / G&G Costs

The following table represents drilling costs for Coalbed Methane:

Table 3B-6. Drilling Costs for Coalbed Methane

Well Depth	Well Cost	Land / G&G Costs
< 2000 feet	\$50.00 / foot	\$10,000
> 2000 feet	\$80.00 / foot	\$10,000

Source: Advanced Resources, International

Drilling Costs were calculated by basin for Tight Sands and Gas Shales because of the differing depths among basins and differing state regulations. The formulas for drilling cost equations are similar for tight sands and gas shales; the average depth of the play is established and at that depth a calculation is made adding a fixed cost to a variable cost per foot.

The following tables represent drilling costs for Tight Sands and Gas Shales:

Table 3B-7. Drilling Costs for Tight Sands

UTAH - Uinta Basin			
	Depth	fixed cost	variable cost \$/foot
	0-2500	20000	40
	2500-5000	50000	50
	5000-7500	50000	60
	7500-10000	50000	70
	10000-12500	50000	80
	12500-15000	50000	95
	15000-20000	50000	240

Table 3B-7. Drilling Costs for Tight Sands

WYOMING - Wind River, Greater Green River Basins			
	Depth	fixed cost	variable cost \$/ft
	0-2500	20000	50
	2500-5000	50000	40
	5000-7500	50000	50
	7500-10000	50000	60
	10000-12500	50000	65
	12500-15000	50000	95
	15000-20000	50000	242
COLORADO - Piceance, Denver Basins			
	Depth	fixed cost	variable cost \$/ft
	0-2500	20000	46
	2500-5000	50000	34
	5000-7500	50000	43
	7500-10000	50000	48
	10000-12500	50000	73
	12500-15000	50000	150
	15000-20000	50000	200
NEW MEXICO - WEST (Rockies) - San Juan Basin			
	Depth	fixed cost	variable cost \$/ft
	0-2500	20000	47
	2500-5000	50000	53
	5000-7500	50000	54
	7500-10000	50000	75
	10000-12500	50000	-
	12500-15000	50000	-
	15000-20000	50000	-

Table 3B-7. Drilling Costs for Tight Sands

NEW MEXICO - East - AZ, SW			
	Depth	fixed cost	variable cost \$/ft
	0-2500	20000	-
	2500-5000	50000	45
	5000-7500	50000	65
	7500-10000	50000	67
	10000-12500	50000	70
	12500-15000	50000	89
	15000-20000	50000	117
APPALACHIA - Appalachian Basin			
	Depth	fixed cost	variable cost \$/ft
	0-2500	30000	30
	2500-5000	30000	25
	5000-7500	30000	25
	7500-10000	30000	25
	10000-12500	30000	-
	12500-15000	30000	-
	15000-20000	30000	-
LA/MS/TX Salt Basins - Cotton Valley / Travis Peak			
	Depth	fixed cost	variable cost \$/ft
	0-2500	10000	30
	2500-5000	20000	32
	5000-7500	20000	53
	7500-10000	20000	90
	10000-12500	20000	90
	12500-15000	20000	95
	15000-20000	20000	-

Table 3B-7. Drilling Costs for Tight Sands

ARKANSAS/OKLAHOMA/TEXAS - Arkoma / Anadarko Basins			
	Depth	fixed cost	variable cost \$/ft
	0-2500	10000	63
	2500-5000	20000	47
	5000-7500	20000	50
	7500-10000	20000	57
	10000-12500	20000	73
	12500-15000	20000	87
	15000-20000	20000	88
MONTANA - Northern Great Plains Basins			
	Depth	fixed cost	variable cost \$/ft
	0-2500	20000	30
	2500-5000	20000	30
	5000-7500	20000	-
	7500-10000	20000	-
	10000-12500	20000	-
	12500-15000	20000	-
	15000-20000	20000	-
TX - Texas Gulf Basins -- Wilcox/Lobo, Vicksburg, Olmos			
	Depth	fixed cost	variable cost \$/ft
	0-2500	10000	24
	2500-5000	20000	26
	5000-7500	20000	37
	7500-10000	20000	63
	10000-12500	20000	122
	12500-15000	20000	163
	15000-20000	20000	217

Table 3B-7. Drilling Costs for Tight Sands

TX / NM - Permian Basin -- Canyon Sands			
	Depth	fixed cost	variable cost \$/ft
	0-2500	10000	-
	2500-5000	20000	44
	5000-7500	20000	50
	7500-10000	20000	50
	10000-12500	20000	67
	12500-15000	20000	110
	15000-20000	20000	188
TX / NM - Permian Basin -- Abo			
	Depth	fixed cost	variable cost \$/ft
	0-2500	10000	-
	2500-5000	20000	54
	5000-7500	20000	70
	7500-10000	20000	71
	10000-12500	20000	72
	12500-15000	20000	91
	15000-20000	20000	119

Source: Advanced Resources, International

Table 3B- 8. Drilling Costs for Gas Shales

MI - Antrim Shale Wells			
	Depth	fixed cost	variable cost \$/ft
	0-2500	20000	60
	2500-5000	20000	100
	5000-7500	20000	120
	7500-10000	20000	130
	10000-12500	20000	-
	12500-15000	20000	-
	15000-20000	20000	-

Source: Advanced Resources, International

STIMC = Stimulation Costs: Provides the cost of stimulating a well in the specific basin by multiplying the given average stimulation cost by the number of stimulation zones.

STIM_CST = Variable average cost of stimulating one zone. (Number of zones is a variable)

STIMC	=	(SZONE*STM_CST)	(16)
-------	---	-----------------	------

PASE = Pumping and Surface Equipment Costs: Determines if the play requires H₂O disposal, adds the variable pumping and surface equipment cost, and multiplies the average depth (if so) to the variable tubing cost of \$5 / foot. If not, a flat variable is added.

PASE	=	IF WATR_DISP equal to 1: PASE = BASET+5*AVGDPHTH IF WATR_DISP not equal to 1: PASE = 10,000	(17)
------	---	--	------

BASET = Variable cost of Pumping and Surface equipment when H₂O disposal is required.

LSE_EQ = Lease Equipment Costs: Established if H₂O disposal is needed and adds this fee (if so) to the variable Lease Equipment costs depending on MEUR.

LSE_EQ	=	IF WATR_DISP equal to 1: IF MEUR3 less than 0.5: LSE_EQ = WOMS_LE +WOML_WTR IF MEUR3 greater than or equal to 0.5: IF MEUR3 less than or equal to 1: LSE_EQ = WOMM_LE+ WOML_WTR IF MEUR3 greater than 1: LSE_EQ = WOML_LE+ WOML_WTR IF WATR_DISP equal to 0: IF MEUR3 less than 0.5: LSE_EQ = WOMS_LE IF MEUR3 greater than or equal to 0.5: IF MEUR3 less than or equal to 1: LSE_EQ = WOMM_LE IF MEUR3 greater than 1: LSE_EQ = WOML_LE	(18)
--------	---	--	------

- WATR_DISP = Establishes whether or not (and degree to which) water disposal is required (No Disposal=0; Maximum Disposal=1)
- WOMS_LE = Small Well Lease Equipment Costs
- WOMM_LE = Medium Well Lease Equipment Costs
- WOML_LE = Large Well Lease Equipment Costs
- WOML_WTR = Water Producing Well Lease Equipment Costs

The matrix for Lease Equipment costs and EUR is shown below:

Table 3B-9. Lease Equipment Costs Matrix

Well Size (EUR)	Lease Equip	Water
Well O&M Small Well - <0.5 Bcf	\$ 50,000	\$ 50,000
Well O&M Medium Well - <1.0 Bcf	\$ 75,000	\$ 50,000
Well O&M Large Well - >1.0 Bcf	\$ 120,000	\$ 50,000

Source: Advanced Resources, International

GAA10 = G&A Costs: Adds on a variable G&A cost

GAA10	=	RST*(LSE_EQ+ PASE+ STIMC+ DACC)	(19)
-------	---	---------------------------------	------

RST = Variable G&A Cost - Currently 10 percent

TCC = Total Capital Costs: The sum of Stimulation Costs, Pumping and Surface Equipment Costs, Lease Equipment Costs, G&A Costs and Drilling and Completion Costs

TCC	=	DACC+STIMC+PASE+LSE_EQ+GAA10	(20)
-----	---	------------------------------	------

DHC = Dry Hole Costs: Calculates the dry hole costs

DHC	=	(DACC+STIMC) * ((1/SCSSRT)-1)	(21)
-----	---	-------------------------------	------

CCWDH = Capital Costs & Dry Hole Costs with Access Adjustment: Combines these two costs, converts into \$/Mcf, and adjusts costs to reflect higher costs in portion of play where lease stipulations occur

CCWDH	=	<p>If ACCESS equals 0 or YEAR is less than ACCESS_YR: CCWDH = (LEASSTIP/(1.0-NOACCESS))* (1.0+ACC_COST) *((TCC+DHC)/DISCRES*1,000,000) + ((1.0-LEASSTIP-NOACCESS)/ (1.0- NOACCESS))*((TCC+DHC)/DISCRES* 1,000,000)</p> <p>If ACCESS is not equal to 0 and YEAR is greater than or equal to ACCESS_YR:</p>	(22)
-------	---	--	------

LEASSTIP = Lease Stipulated Share: The percentage of the play that is subject to Federal lease stipulations

ACC_COST = The extra cost in Federal restricted areas (areas subject to Federal lease stipulations)

VOC = Variable Operating Costs: Establishes if the play requires H₂O disposal and adds the appropriate cost (\$/Mcf)

VOC	=	IF WATR_DISP greater than 0.4:	
VOC	=	(WTR_DSPT*(TECHYRS)*(WDT%/20))	
		+((WOMS)*(TECHYRS)*(PUMP%/20))	
		+((GASTR)*(TECHYRS)*(GTF%/20))	
		+(OCWW\$)	(23)
		IF WATR_DISP less than or equal to 0.4:	
VOC	=	(WTR_DSPT*(TECHYRS)*(WDT%/20))	
		+((WOMS)*(TECHYRS)*(PUMP%/20))	
		+((GASTR)*(TECHYRS)*(GTF%/20))	
		+(OCNW\$)	

- | | | |
|----------|---|--|
| WTR_DSPT | = | Water Disposal Fee: \$0.05 per Mcf |
| WDT% | = | Total percentage decrease in H ₂ O disposal and treatment costs over the development period due to technological advances [There was no change in these costs in the AEO2004] |
| WOMS | = | H ₂ O Costs, Small Well |
| PUMP% | = | Total percentage decrease in pumping costs over the development period due to technological advances [There was no change in these costs in the AEO2004] |
| TECHYRS | = | Number of years (from base year) over which incremental advances in indicated technology have occurred |
| GASTR | = | Gas Treatment and Fuel costs - \$0.25 per Mcf |
| GTF% | = | Total percentage decrease in gas treatment and fuel costs over the development period due to technological advances [There was no change in these costs in the AEO2004] |
| OCWW\$ | = | Operating Costs with H ₂ O - \$0.30 per Mcf |
| OCNW\$ | = | Operating Costs without H ₂ O - \$0.25 per Mcf |
| VOC2 | = | Variable Operating Costs: Establishes an extra operating cost for plays that will incorporate the technology of Enhanced CBM in the future |

VOC2	=	If ECBMR is equal to 1:	
VOC2	=	(VOC+((ECBM_OC+VOC)*(ENH_CBM%))/ (1+ENH_CBM%))	(24)
		If ECBMR is not equal to 1:	
VOC2	=	VOC	

- | | | |
|----------|---|--|
| ECBM_OC | = | Enhanced CBM Operating Costs Variable - \$1.00 per Mcf |
| ENH_CBM% | = | Enhanced CBM EUR Percentage gain |

FOMC = Fixed Operating and Maintenance Costs: (1) Establish whether or not the play requires H2O disposal; (2) determine the size of the reserves / well (EUR); (3) calculate the Fixed O&M Costs for the well

Table 3B-10. Operation and Maintenance Costs Matrix

Operation & Maintenance Costs	WOM*_OMW H ₂ O	WOM*_OM No H ₂ O
Well O&M <0.5 Bcf	\$ 180,000	\$ 108,000
Well O&M <1.0 Bcf	\$ 270,000	\$ 162,000
Well O&M >1.0 Bcf	\$ 360,000	\$ 216,000

Source: Advanced Resources, International

<p>FOMC =</p> <p style="padding-left: 40px;">If WATR_DISP is greater than or equal to 0.5:</p> <p style="padding-left: 80px;">If MEUR3 is less than or equal to .5:</p> <p style="padding-left: 120px;">FOMC = DIS_FACT*WOMS_OMW+ VOC* (DISCRES*1,000,000)</p> <p style="padding-left: 80px;">If MEUR3 is greater .5 and less than or equal to 1:</p> <p style="padding-left: 120px;">FOMC = DIS_FACT*WOMM_OMW +VOC*(DISCRES*1,000,000)</p> <p style="padding-left: 80px;">If MEUR3 is greater than 1:</p> <p style="padding-left: 120px;">FOMC = DIS_FACT*WOML_OMW +VOC*(DISCRES*1,000,000)</p> <p style="padding-left: 40px;">If WATR_DISP is less than 0.5:</p> <p style="padding-left: 80px;">If MEUR3 is less than or equal to .5:</p> <p style="padding-left: 120px;">FOMC = .6*DIS_FACT*WOMS_OMW+VOC* (DISCRES*1,000,000)</p> <p style="padding-left: 80px;">If MEUR3 is greater .5 and less than or equal to 1:</p> <p style="padding-left: 120px;">FOMC = .6*DIS_FACT*WOMM_OMW+VOC* (DISCRES*1,000,000)</p> <p style="padding-left: 80px;">If MEUR3 is greater than 1:</p> <p style="padding-left: 120px;">FOMC = .6*DIS_FACT*WOML_OMW+VOC* (DISCRES*1,000,000)</p>	(25)
--	------

WOMS_OMW = Operating & Maintenance - Small well with H₂O disposal
 WOMM_OMW = Operating & Maintenance - Medium well with H₂O disposal
 WOML_OMW = Operating & Maintenance - Large well with H₂O disposal
 WOMS_OM = Operating & Maintenance - Small well without H₂O disposal
 WOMM_OM = Operating & Maintenance - Medium well without H₂O disposal
 WOML_OM = Operating & Maintenance - Large well without H₂O disposal

 TOTL_CST = Total Costs (\$/Mcf): Calculates the total costs of producing the gas in (\$/Mcf)

TOTL_CST	=	CCWDH+FOMC/(DISCRES*1,000,000)	(26)
----------	---	--------------------------------	------

NET_PRC = Net Price (\$/Mcf): Calculates the Royalty & Severance Tax on the gas price

NET_PRC	=	(1-RST)*(WHGP+BASNDIF)	(27)
---------	---	------------------------	------

RST = Variable Royalty and Severance Tax - Set at 17 percent

NET PROFITABILITY

The next section of the unconventional gas model focuses on profitability. The profitability of the play drives the model outputs. The better the economics of the play, the faster it will be developed so that the operator will maximize the potential economic profit.

MIN_ROI = Risk premium (\$/Mcf): A minimum rate of return on investment

NET_PROF = Net Profits (\$/Mcf): Calculates whether or not the play is profitable under the current variable conditions

NET_PROF	=	NET_PRC - TOTL_CST - MIN_ROI	(28)
----------	---	------------------------------	------

NET_PROF2 = Net Profits: Allows only the profitable plays to become developed.

NET_PROF2	=	If NET_PROF is greater than 0: NET_PROF2 = NET_PROF If NET_PROF is less than or equal to 0: NET_PROF2 = 0
-----------	---	--

(29)

MODEL OUTPUTS

The last section of the unconventional gas model supplies the user with yearly model outputs by basin.

UNDV_WELLS = Undeveloped Wells: (1) Establish whether or not the play is profitable and therefore ready for development; (2) establish whether or not prohibitive environmental or pipeline regulations exist for the play (Note: For EPCA plays this step applies only to environmental regulation.) (3) If such regulations exist, restrict a certain percentage of the play from development; (4) If such regulations do not exist, allow the entire play to be accessible for development.

UNDV_WELLS	=	If NET_PROF is greater than 0: IF ENPRGS = 1: UNDV_WELLS = TRW*(ENV%+ LOW%/LOWYRS *TECHYRS) IF ENPRGS = 0: UNDV_WELLS = TRW If NET_PROF is less than or equal to 0: UNDV_WELLS = 0	(30)
------------	---	--	------

- ENPRGS = Establishes if the play is pipeline or environmentally regulated.
- ENV% = The percentage of the play that is not restricted from development due to environmental or pipeline regulations
- LOW% = The percentage of the play that is restricted from development due to environmental or pipeline regulations
- LOWYRS = The number of years that it will take for technology improvements to offset the prohibitive effect of the environmental and or pipeline regulations.

UNDV_WELLS2 = For EPCA plays - available wells adjusted to account for well locations that are off limits due to Federal administrative decree.

UNDV_WELLS2	=	If EPCA is equal to 1: UNDV_WELLS2 = (1. - NACC_FA) * UNDV_WELLS If EPCA is equal to 0: UNDV_WELLS2 = UNDV_WELLS	(31)
-------------	---	--	------

EPCA = Establishes if a play is in a basin that was studied in the EPCA assessment (in studied basin = 1, not in studied basin = 0)

NACC_FA = For EPCA plays - the percentage of the play that is off limits due to Federal administrative decree.

UNDV_WELLS3 = For EPCA plays - available wells adjusted to account for well locations that are off limits due to pipeline regulations.

UNDV_WELLS3	=	If EPCA is equal to 1: $\text{UNDV_WELLS3} = \text{minimum}(1., (1.-\text{NACC_PIPE}+\text{LIFRT_PIPE}*\text{TECHYRS})) * \text{UNDV_WELLS2}$	(32)
		If EPCA is equal to 0: $\text{UNDV_WELLS3} = \text{UNDV_WELLS2}$	

NACC_PIPE = For EPCA plays - the percentage of the play that is initially off limits due to pipeline regulations.

LIFRT_PIPE = For EPCA plays - of the percentage of the play that is initially off limits due to pipeline regulations, the amount in percentage that will become accessible each year due to technological progress (e.g., if 23 percent is initially off limits and LIFRT_PIPE = 2 percent, then 2 of this 23 percent will become accessible each year due to technological progress).

MEUR4 = Mean EUR: This variable establishes whether or not the play is profitable and if so, allows the EUR to appear for development

MEUR4	=	If NET_PROF is greater than 0: $\text{MEUR4} = \text{MEUR3}$	(33)
		If NET_PROF is less than or equal to 0: $\text{MEUR4} = 0$	

PROV_RES = Proved Reserves: This variable is a plugged number in the first year to equate with the EIA published figure

RP_RAT = Reserves-to-Production (R/P) Ratio: This variable is the current R/P ratio. For some plays this is a plugged number in the first year.

PROD = Current Production: This variable is a plugged number in the first year to equate with the EIA published figure

DRL_SCHED = Drilling Schedule: This variable determines the drilling schedule for the play. The drilling schedule is dependent upon the profitability of the play.

```

DRL_SCHED = If HYP% is equal to 0:
    If NET_PROF2 is less than or equal to 0:
        DRL_SCHED = 0
    If NET_PROF2 is greater than 0:
        If NET_PROF2 is less than LOW$:
            DRL_SCHED = USLOW
        If NET_PROF2 is greater than or equal to LOW$:
            If NET_PROF2 is less than SMAL$:
                DRL_SCHED = SLOW
            If NET_PROF2 is greater than or equal to SMAL$:
                If NET_PROF2 is less than MED$:
                    DRS_SCHED =MED
                If NET_PROF2 is greater than or equal to MED$:
                    If NET_PROF2 is less than LAR$:
                        DRL_SCHED=FAST
                    If NET_PROF2 is greater than or equal to LAR$:
                        DRL_SCHED=UFAST

    If HYP% is not equal to 0:
        DRL_SCHED = 0
    
```

(34)

HYP% = Establishes whether or not the play is hypothetical

Table 3B-11. Drilling Rules Matrix

		Drilling Rules	
Net Profitability \$/Mcf		Drilling Schedule in Years	
LOW\$	0.25	USLOW	40
SMAL\$	0.5	SLOW	30
MED\$	0.75	MED	20
LAR\$	1	FAST	10
XLAR\$	>1.00	UFAST	10

DRL_SCHED2 = Drilling Schedule: This variable allows technology advancement to effect the drilling schedule

DRL_SCHED2	=	If DRL_SCHED is greater than 0: If EMRG is equal to 1: DRL_SCHED2 = (DRL_SCHED+EMERG%) -EMERG# If EMRG is not equal to 1: DRL_SCHED2 = DRL_SCHED If DRL_SCHED is less than or equal to 0: DRL_SCHED2 = 0	(35)
------------	---	---	------

EMRG = The parameter that determines if the play is an emerging basin. This designation was made by ARI.

EMERG% = The number of years added onto the drilling schedule because of the hindrance of the play being an emerging basin.

EMERG# = The number of "emerging basin" additional years taken off the drilling schedule by advancements in technology.

DRL_SCHED3 = Drilling Schedule: This variable calculates and justifies the technology impacts of the previous two Drilling Schedule variables to ensure that the proper drilling schedule is positive.

DRL_SCHED3 =		If DRL_SCHED2 is less than DRL_SCHED: DRL_SCHED3 = DRL_SCHED If DRL_SCHED2 is greater than or equal to DRL_SCHED: DRL_SCHED3 = DRL_SCHED2	(36)
--------------	--	---	------

DRL_SCHED4 = Drilling Schedule: This variable adjusts the drilling schedule for the play to reflect the effect of access-limiting lease stipulations

<p>DRL_SCHED4 =</p> <p>DRIL_SCHED4 =</p> <p>DRIL_SCHED4 =</p>	<p>If ACCESS equals 0 or YEAR is less than ACCESS_YR:</p> <p>(LEASSTIP/(1.0-NOACCESS))*</p> <p>(1.0+ACC_XYRS)*DRIL_SCHED3 +</p> <p>((1.0-LEASSTIP-NOACCESS)/</p> <p>(1.0-NOACCESS))*DRIL_SCHED3</p> <p>If ACCESS is not equal to 0 and YEAR is greater than or equal to ACCESS_YR:</p> <p>DRIL_SCHED4 = DRIL_SCHED3</p>	(37)
---	---	------

ACC_XYRS = The number of extra years it takes to development a play in Federal restricted areas (areas subject to Federal lease stipulations)

NW_WELLS = New Wells: The number of wells drilled in the play in the current year

<p>NW_WELLS</p>	<p>=</p> <p>If DRL_SCHED4 is greater than 0:</p> <p> If Year is greater than 1 and NW_WELLS_LAG is greater than 0:</p> <p> If UNDV_WELLS3/DRL_SCHED4 is greater than 1.3*NW_WELLS_LAG:</p> <p> NW_WELLS = 1.3*NW_WELLS_LAG</p> <p> Else if UNDV_WELLS3/DRL_SCHED4 is less than .7*NW_WELLS_LAG:</p> <p> NW_WELLS = .7*NW_WELLS_LAG</p> <p> Else:</p> <p> NW_WELLS = UNDV_WELLS3/ DRL_SCHED4</p> <p> If Year is equal to 1 or NW_WELLS_LAG is equal to 0:</p> <p> NW_WELLS = UNDV_WELLS3/DRL_SCHED4</p> <p> If DRL_SCHED4 is equal to 0:</p> <p> NW_WELLS = 0</p>	(38)
-----------------	---	------

NW_WELLS_LAG = New Wells Lagged: The number of wells drilled in the play in the previous year

NW_WELLS2 = New Wells2: This variable ensures the wells drilled is a positive number

<p>NW_WELLS2 = If UNDV_WELLS3 is less than NW_WELLS: NW_WELLS2 = UNDV_WELLS3 If UNDV_WELLS3 is greater than or equal to NW_WELLS: NW_WELLS2 = NW_WELLS</p>	(39)
---	------

DRA = Drilled Reserve Additions: This variable establishes the existence of reserve additions in plays that have had development in that year.

<p>DRA = NW_WELLS2*MEUR4</p>	(40)
------------------------------	------

RGA = Reserve Growth Additions: This variable establishes if the play will have reserve growth and then allocates an appropriate amount for the play.

<p>RGA = If RES_GR is equal to 1: If ENCBM is equal to 1: RGA = RGR*PROV_RES + .025*((MEUR3- MEUR2)*DEV_CEL) If ENCBM is not equal to 1: RGA = RGR*PROV_RES: If RES_GR is not equal to 1: RGA = 0</p>	(41)
--	------

RES_GR = Establishes whether or not the play will have reserve growth. These parameters are explained in the technology section.

RGR = Reserve Growth Rate

R_ADD = Total Reserve Additions: This variable sums the Drilled Reserves and the Reserve Growth

<p>R_ADD = DRA+RGA</p>	(42)
------------------------	------

PROV_RES2 = Proved Reserves for the next year: This variable calculates the reserves for the coming year from the calculation of occurrences during the year. This variable is an input in Year 1 but then turns into a formula.

$\begin{aligned} \text{PROV_RES2} &= && \text{If } (\text{PROV_RES}+\text{R_ADD}-\text{PROD}) \text{ is greater than 0:} \\ &&& \text{PROV_RES2} = \text{PROV_RES}+\text{R_ADD}-\text{PROD} \\ &&& \text{If } (\text{PROV_RES}+\text{R_ADD}-\text{PROD}) \text{ is less than or equal to 0:} \\ &&& \text{PROV_RES2} = 0 \end{aligned}$	(43)
--	------

RP_RAT2 = R/P Ratio for the next year: This variable establishes the play-level R/P ratio for the next year by subtracting one from the current R/P, not allowing the R/P to drop under a specified limit.

$\begin{aligned} \text{RP_RAT2} &= && \text{If R/P is greater than MIN_RP:} \\ &&& \text{RP_RAT2} = \text{RP_RAT} - \text{Minimum}(1, \text{R_ADD}/\text{PROD}) \\ &&& \text{If R/P is less than or equal to 10:} \\ &&& \text{RP_RAT2} = \text{RP_RAT} \end{aligned}$	(44)
---	------

MIN_RP = Minimum achievable R/P ratio

PROD2 = Expected (not realized) production for the following year: This variable is combined with other OGSM expected production values to obtain expected NGTDM regional-level Production-to-Reserve ratios for the following year.

$\begin{aligned} \text{PROD2} &= && \text{If R/P2 is equal to 0:} \\ &&& \text{PROD2} = 0 \\ &&& \text{If R/P2 is not equal to 0:} \\ &&& \text{PROD2} = \text{PROV_RES2}/(\text{RP_RAT2}) \end{aligned}$	(45)
---	------

Appendix 3C. Unconventional Gas Recovery Supply Technologies

I. INTRODUCTION


The Unconventional Gas Recovery Supply Submodule (UGRSS), shown in **Figure 3C-1**, relies on the Technology Impacts and Timing functions to capture the effects of technology progress on the costs and rates of gas production from coalbed methane, gas shales, and tight sands. The numerous types of research and technologies are grouped into 11 specific “technology packages,” that encompass the full spectrum of key disciplines -- geology, engineering, operations, and the environment. The enclosed materials define these 11 technology packages for unconventional gas exploration and production (E&P).

The technology packages are grouped into four distinct technology cases -- Reference Case, Slow Technology, and Rapid Technology -- that capture three different futures for technology progress, as further described below:

- **Reference Case** captures the current status and trends in the E&P technology for unconventional gas. In addition to industry funded R&D, a limited amount of R&D on tight sand reservoirs is directly supported by the U.S. Department of Energy (DOE), particularly on advanced macro-exploration, seismic technologies, and matching of technology to reservoir settings. The Gas Technology Institute (GTI) R&D program funds valuable studies of emerging and future gas plays and supports advanced well stimulation technology. Also, direct R&D on coalbed methane (CBM) has been funded by the DOE Small Business Innovative Research (SBIR) program for CBM cavitation technology. In addition to the directly funded R&D, considerable indirect R&D by DOE, GTI and industry contributes to unconventional gas E&P, particularly on drilling cost reductions, re-stimulation opportunities, produced gas and water treatment, and environmental mitigation. However, overall technology progress in unconventional gas has slowed noticeably with the phase-out of formal R&D on this topic by GTI and the United States Geological Survey (USGS).
- For the Annual Energy Outlook 2004 (AEO2004), the **Slow Technology** case represents an R&D outlook where the effects of the various technologies are generally about 50 percent less than in the Reference Case.
- For the AEO2004, the **Rapid Technology** case represents an R&D outlook where the effects of the various technologies are generally about 50 percent greater than in the Reference Case.

Figure 3C-1

NEMS Unconventional Gas Recovery Supply Submodule

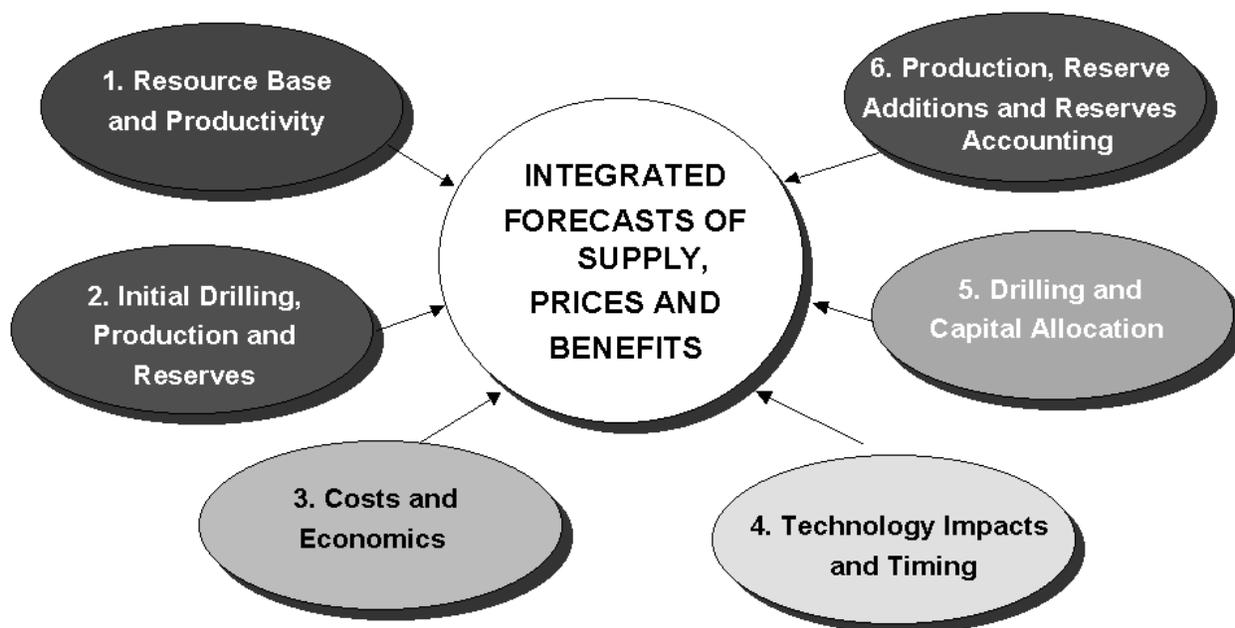

The 11 high impact technology packages addressed by the UGRSS are listed below:

1. Increasing the Resource Base with Basin Assessments.
2. Accelerating the Development of Emerging Plays and Expanding the Resource Base with Play Specific, Extended Reservoir Characterization.
3. Improving Reserve Growth in Existing Fields with Advanced Well Performance Diagnostics and Remediation.
4. Improving Exploration Efficiency with Advanced Exploration and Natural Fracture Detection R&D.
5. Increasing Reserves Per Well with Geology/Technology Modeling and Matching.
6. Improving Well Performance with More Effective, Lower Damage Well Completions and Stimulations.
7. Lowering Well Drilling and Completion Costs with Targeted Drilling and Hydraulic Fracturing R&D.
8. Lowering Water Disposal and Gas Treating Costs by using New Practices and Technology.
9. Improving Recovery Efficiencies with Advanced Well Completion Technologies such as Cavitation, Horizontal Drilling and Multi-Lateral Wells.
10. Improving and Accelerating Gas Production with Other Unconventional Gas Technologies, such as Enhanced CBM and Gas Shales Recovery.
11. Mitigating Environmental and Other Constraints that Severely Restrict Development.

The impact each of these 11 R&D packages has on unconventional gas development and the specific “technology lever” used to model these impacts in the Supply and Technology Model is shown on **Table 3C-1**.

Table 3C-1

Summary of Technological Progress

<u>R&D Program</u>	<u>General Impact</u>	<u>Specific Technology Lever</u>
1. Basin Assessments	Increases available resource base	Accelerates time hypothetical plays become available for development
2. Extended Resource Characterization	Increases pace of new development	Accelerates pace of development for emerging plays
3. Well Performance Diagnostics and Remediation	Expands resource base	Extends reserve growth for already proved reserves
4. Exploration and Natural Fracture Detection R&D	Increases success of development Improves exploration efficiency	Improves exploration/development success rate for all plays Improves ability to find best prospects and areas
5. Geology/Technology Modeling & Matching	Matches “Best Available Technology” to play	Improves EURs/Well
6. Improved Drilling and Completion Technology	Improves fracture length and conductivity Reduces drilling and stimulation damage	Improves EURs/Well Improves R/P ratios
7. Lower Cost Drilling and Stimulation	More efficient drilling and stimulation	Lowers well drilling and stimulation capital costs
8. Lower Cost Water and Gas Treating	More efficient gas separation and water	Lowers water and gas treatment Operation and Maintenance (O&M) costs

9. Advanced Well Completion	Defines applicable plays	Accelerates date technology is available
	Introduces improved version of technology	Increases recovery efficiency
10. Other Recovery Technology	Introduces dramatically new recovery technology	Accelerates date technology is available
		Increases EURs/Well and lowers costs
11. Environmental Mitigation	Removes development constraints in environmentally sensitive basins	Increases basin areas available for for development

The detailed parameter values and expected impacts for each technology case are provided on **Table 3C-2** for Coalbed Methane (CBM), on **Table 3C-3** for gas shales, and **Table 3C-4** for Tight Gas Sands.

The remainder of the enclosed materials describe for each technology area: (1) the technical problem(s) currently constraining unconventional gas development; (2) the technology solutions and R&D program being proposed; and, (3) the expected impact and benefits from successful development and implementation of R&D.

**Table 3C-2
Details of Coalbed Methane Technological Progress**

R&D Program	CBM Resource Impacted	Technology Lever	Current Situation	Technology Cases		
				Reference Case	Slow Technology	Rapid Technology
1. Basin Assessment	Hypothetical Plays	Date Available	Not Available	Non-EPCA Plays: Not Available	Non-EPCA Plays: Not Available	Non-EPCA Plays: Year 2016
				EPCA Plays: Year 2021	EPCA Plays: Year 2021	EPCA Plays: Year 2021
2. Extended Resource Characterization	Emerging Plays	Pace of Development	30 to 60 years (+30 years over Developing Plays)	Non-EPCA Plays: -.5 yr/year (Max -30 years)	Non-EPCA Plays: -.25 yr/year (Max -30 years)	Non-EPCA Plays: -.75 yr/year (Max -30 years)
				EPCA Plays: -.75 yr/year (Max -30 years)	EPCA Plays: -.38 yr/year (Max -30 years)	EPCA Plays: -1.13 yr/year (Max -30 years)
3. Well Performance Diagnostics & Remediation	Proved Reserves	Reserve Growth	All Plays with Proved Reserves @ 3%/yr., declining	All Plays @ 4%/yr., declining .1% over 40 years	All Plays @ 2%/yr., declining .1% over 20 years	All Plays @ 6%/yr., declining .1% over 60 years
4. Exploration & Natural Fracture Detection R&D	All Plays	a. E/D Success Rate	25% to 95%	+2%/year from 2001 (max 95%)	+1%/year from 2001 (max 95%)	+3%/year from 2001 (max 95%)
		b. Exploration Efficiency	Random	Identify "Best" 30% by Year 2022	Identify "Best" 30% by year 2048	Identify "Best" 30% by year 2013
5. Geology/Technology Modeling and Matching	All Plays	EUR/Well	As Calculated	+25%/year (30 years)	+13% (30 years)	+38% (30 years)

**Table 3C-2
Details of Coalbed Methane Technological Progress**

R&D Program	CBM Resource Impacted	Technology Lever	Current Situation	Technology Cases		
				Reference Case	Slow Technology	Rapid Technology
6. Improved Drilling and Stimulation	All Plays	EUR/Well	As Calculated	+ .25%/year (30 years)	+ .13%/year (30 years)	+ .38%/year (30 years)
7. Lower Cost Drilling & Stimulation	All Plays	D&S Costs/Well	As Calculated	Not Available	Not Available	Not Available
8. Water and Gas Treating R&D	Wet CBM Plays	Water & Gas Treating O&M Costs/Mcf	\$0.30/Mcf	Not Available	Not Available	Not Available
9. Advanced CBM Cavitation	Cavity Fairway Plays	EUR/Well	As Calculated	Not Available	Not Available	Not Available
10. Enhanced CBM Recovery	ECBM Eligible Plays	a. Recovery/Efficiency	As Calculated	Not Available	Not Available	+45% (year 2016)
		b. O&M Costs/Mcf	As Calculated	Not Available	Not Available	+\$0.75/Mcf, Incremental
11. Environmental Mitigation	EV Sensitive Plays	Acreage Available	Non-EPCA Plays: 35% of Play Restricted	Non-EPCA Plays: Removed in 35 years (1%/yr from year 2001)	Non-EPCA Plays: Removed in 70 years (.5%/yr from year 2001)	Non-EPCA Plays: Removed in 23 years (1.5%/yr from year 2001)
			EPCA Plays: Variable	EPCA Plays: Variable	EPCA Plays: Variable (.5*Reference Case Values)	EPCA Plays: Variable (1.5*Reference Case Values)

**Table 3C-3
Details of Gas Shales Technological Progress**

R&D Program	Gas Shales Resource Impacted	Technology Lever	Current Situation	Technology Cases		
				Reference Case	Slow Technology	Rapid Technology
1. Basin Assessment	Hypothetical Plays	Date Available	Not Available	Not Available	Not Available	Year 2016
2. Extended Resource Characterization	Emerging Plays	Pace of Development	30 to 60 years (+30 years over Developing Plays)	-.5 yr/year (Max -30 years)	-.25 yr/year (Max -30 years)	-.75 yrs/year (Max -30 years)
3. Well Performance Diagnostics and Remediation	Proved Reserves	Reserve Growth	All Plays with Proved Reserves @ 3%/yr., declining	All Plays @ 4%/yr., declining .1% over 40 years	All Plays @ 2%/yr., declining .1% over 20 years	All Plays 6%/yr, declining .1% over 60 years
4. Exploration & Natural Fracture Detection R&D	All Plays	a. E/D Success Rate	25% to 95%	+2%/year from 2001 (max 95%)	+1%/year from 2001 (max 95%)	+3%/year from 2001 (max 95%)
		b. Exploration Efficiency	Random	Identify "Best" 30% by Year 2022	Identify "Best" 30% by year 2048	Identify "Best" 30% by year 2013
5. Geology/ Technology Modeling and Matching	All Plays	EUR/Well	As Calculated	+25%/year (30 years)	+13% (30 years)	+38% (30 years)

**Table 3C-3
Details of Gas Shales Technological Progress**

R&D Program	Gas Shales Resource Impacted	Technology Lever	Current Situation	Technology Cases		
				Reference Case	Slow Technology	Rapid Technology
6. Improved Drilling and Stimulation	All Plays	EUR/Well	As Calculated	+.25%/year (30 years)	+.13%/year (30 years)	+.38%/year (30 years)
7. Lower Cost Drilling & Stimulation	All Plays	D&S Costs/Well	As Calculated	Not Available	Not Available	Not Available
8. Water and Gas Treating R&D	All Plays	Water & Gas Treating O&M Costs/Mcf	\$0.30/Mcf	Not Available	Not Available	Not Available
9. Multi-Lateral Completions	Eligible Plays	Recovery Efficiency	As Calculated	20% (Year 2016)	Not Available	30% (Year 2009)
10. Other Gas Shales Technology	Eligible Plays	a. EUR/Well	As Calculated	Not Available	Not Available	Not Available
		b. O&M Costs/Mcf	As Calculated	Not Available	Not Available	Not Available
11. Environmental Mitigation	EV Sensitive Plays	Acreage Available	35% of Play Restricted	Removed in 35 years (1%/yr from year 2001)	Removed in 70 years (.5%/ yr from year 2001)	Removed in 23 years (1.5%/yr from year 2001)

**Table 3C-4
Details of Tight Gas Sands Technological Progress**

R&D Program	Tight Sands Resource Impacted	Technology Lever	Current Situation	Technology Cases		
				Reference Case	Slow Technology	Rapid Technology
1. Basin Assessment	Hypothetical Plays	a. Date Available	Not Available	Non-EPCA Plays: Not Available	Non-EPCA Plays: Not Available	Non-EPCA Plays: Year 2016
				EPCA Plays: Year 2021	EPCA Plays: Year 2021	EPCA Plays: Year 2021
2. Extended Resource Characterization	Emerging Plays	Pace of Development	30 to 60 years (+20 years over Developing Plays)	Non-EPCA Plays: -.5 yr/year (Max -30 years)	Non-EPCA Plays: -.25 yr/year (Max -30 years)	Non-EPCA Plays: -.75 yr/year (Max -30 years)
				EPCA Plays: -.75 yr/year (Max -30 years)	EPCA Plays: -.38 yr/year (Max -30 years)	EPCA Plays: -1.13 yr/year (Max -30 years)
3. Well Performance Diagnostics and Remediation	Proved Reserves	Reserve Growth	San Juan Basin @ 3%/yr., declining	All Plays @ 2%/yr., declining (20 years)	All Plays @ 1%/yr., declining (10 years)	All Plays 3%/yr, declining (30 years)
4. Exploration & Natural Fracture Detection R&D	All Plays	a. E/D Success Rate	30% to 95%	+ .2%/year from 2000 (max 95%)	+ .1%/year from 2000 (max 95%)	+ .3%/year from 2000 (max 95%)
		b. Exploration Efficiency	Random	Identify "Best" 30% by Year 2022	Identify "Best" 30% by year 2048	Identify "Best" 30% by year 2013
5. Geology/Technology Modeling and Matching	All Plays	EUR/Well	As Calculated	+ .25%/year (30 years)	+ .13% (30 years)	+ .38% (30 years)

**Table 3C-4
Details of Tight Gas Sands Technological Progress**

R&D Program	Tight Sands Resource Impacted	Technology Lever	Current Situation	Technology Cases		
				Reference Case	Slow Technology	Rapid Technology
6. Improved Drilling and Stimulation	All Plays	a. EUR/Well	As Calculated	+0.25%/year (30 years)	+0.13%/year (30 years)	+0.38%/year (30 years)
7. Lower Cost Drilling & Stimulation	All Plays	D&S Costs/Well	As Calculated	Not Available	Not Available	Not Available
8. Water and Gas Treating R&D	All Plays	Water & Gas Treating O&M Costs/Mcf	\$0.15/Mcf	Not Available	Not Available	Not Available
9. Horizontal Wells	Continuous Sands	Recovery Efficiency	As Calculated	+10% (year 2016)	+8.5% (year 2020)	+11.5% (year 2013)
10. Other Tight Gas Technology	Other Sands	EUR/Well	As Calculated	10% (Year 2016)	Not Available	15% (Year 2009)
11. Environmental Mitigation	EV Sensitive Plays	Acreage Available	Non-EPCA Plays: 35% of Play Restricted	Non-EPCA Plays: Removed in 35 years (1%/yr from year 2001)	Non-EPCA Plays: Removed in 70 years (.5%/ yr from year 2001)	Non-EPCA Plays: Removed in 23 years (1.5%/yr from year 2001)
			EPCA Plays: Variable	EPCA Plays: Variable	EPCA Plays: Variable: .5*Reference Case Values	EPCA Plays: Variable: 1.5*Reference Case Values

Technology Packages

1. Increasing the Resource Base with Basin Assessments

Background and Problem

A significant portion of the unconventional gas resource base (about 120 Tcf) and many of the high potential gas settings are hypothetical plays. Because basic information is lacking on these plays, industry is constrained in exploring or developing them in a timely fashion. The hypothetical plays listed on **Tables 3C-6, 3C-7, and 3C-8** are currently not available for development. The 1995 USGS National Assessment was used as the basis for the play categorization and for guidance on resource estimates in these tables. In addition, the resource estimates for certain of the plays have been updated and expanded by special studies by Advanced Resources International, Inc.

Technology Lever

Fundamental studies of the geology and hydrocarbon potential of these new gas plays will be required to initiate their development. These studies would provide the essential foundation for exploring and developing natural gas from hypothetical plays and would improve their probabilities for success.

Impacts and Benefits

Under Rapid Technology, Reference Case Technology and Slow Technology those plays in basins recently studied under the Energy Policy and Conservation Act (the “EPCA Assessment”¹) become available for industry consideration in the year 2021. All other plays under Reference Case Technology and Slow Technology do not become available for development. Rapid Technology makes these gas plays available for industry consideration in year 2016.

Foundation for Technology Lever

The foundation for the “Basin Studies and Assessments” technology lever is expert judgement. The input data for this expert judgement stems from the observed industry responses to a variety of major basin level studies of unconventional gas prepared in the past 25 years:

- Initial ERDA/DOE basin and play level resource and recoverable estimates for tight gas basins (1980).
- Subsequent Gas Resource Institute (GRI) series of basin studies and assessments for eight major coalbed methane basins (1990-1997), prepared by ARI and the Bureau of Economic Geology (BEG), Texas.
- Joint USGS/ARI basin study and assessment for the Barnett Shale in the Fort Worth Basin, Texas (1998).
- “Portfolio of Emerging Natural Gas Resources” (1999) for the three major Rocky Mountain tight gas basins, sponsored by GRI and prepared by ARI.
- Gas Atlas series for major natural gas producing states or regions, sponsored by GRI and prepared by BEG, Barlow and Haun and various state geological surveys.

¹ The following basins (study areas) were reassessed by the USGS as part of a Federal interagency study of access restrictions in the Rocky Mountains: the Paradox/San Juan, the Uinta/Piceance, the Greater Green River, the Powder River, and the Montana Thrust Belt. The study, *Scientific Inventory of Onshore Federal Land’s Oil and Gas Resources and Reserves and the Extent and Nature of Restrictions or Impediments to their Development* (January 2003), was conducted under the authority of the Energy Policy and Conservation Act (EPCA).

The specific parameter values for the technology cases, for all three of the unconventional gas resources (CBM, gas shales and tight sands), are set forth in **Table 3C-5** below:

Table 3C-5

Parameter Values for Basin Assessment Technologies

Technology Case	Year Hypothetical Plays Become Available
<i>Current Situation</i>	Not Available
<i>Reference Case</i>	EPCA Plays: 2021
	Non-EPCA Plays: Not Available
<i>Slow Technology</i>	EPCA Plays: 2021
	Non-EPCA Plays: Not Available
<i>Rapid Technology</i>	EPCA Plays: 2021
	Non-EPCA Plays: 2016

Table 3C-6

Hypothetical CBM Plays and Resources

Basins	Gas Plays	Undeveloped Resource (Bcf)
Appalachia	N. Basin -- Syncline	3,472
Mid-Continent	Forest City/Arkoma Syncline	2,391
San Juan	Southern (Menefee)	409
Uinta	Sego	556
Piceance	Deep Basin	721*
Green River	Deep Basin	729*
Black Warrior	Central Basin	233

Source: Advanced Resources, International

**New Deep CBM plays added by Advanced Resources International, Inc.*

Table 3C-7

Hypothetical Gas Shale Plays and Resources

Basin	Gas Play	Undeveloped Resources (Bcf)
Appalachia	Devonian Shale - Low Thermal Maturity	3,665
Michigan	Antrim Shale - Undeveloped Area	8,046
Illinois	New Albany Shale - Developing Area	2,067
Cincinnati Arch	Devonian Shale	1,501
Williston	Shallow Niobrara, Biogenic Gas	1,683

Source: Advanced Resources, International

Table 3C-8

Hypothetical Tight Sand Plays and Resources

Basin	Gas Plays	Undeveloped Resources (Bcf)
Appalachia	Clinton/Medina Moderate	5,695
	Clinton/Medina Low	3,049
	Upper Devonian Moderate	823
	Upper Devonian Low	1,836
Columbia	Basin Center	6,532
Uinta	Tertiary West	878
	Basin Flank MV	5,119
	Deep Synclinal MV	1,328
Piceance	N. Basin WF/MV	2,768
Green River	Fort Union	1,274
	Lewis	19,646
	Deep MV	21,840
	Deep Frontier	34,551
Wind River	Fort Union/Lance Deep	15,162*
	MV/Frontier Deep	1169*
N. Great Plains	Moderate Potential	12,776
	Low Potential	7,016

Source: Advanced Resources, International

**New Tight Gas Plays added by Advanced Resources International, Inc.*

2. Accelerating the Development of Emerging Unconventional Gas Plays With Reservoir Characterization

Background and Problem

Much of the unconventional gas resource (about 180 Tcf) is in new, emerging plays in the Rocky Mountain basins. Reliable, rigorous information on the key reservoir parameters controlling the gas production in these new, poorly defined gas plays is lacking. Also lacking is information on how best to match technology to the geology and reservoir properties of these gas plays. Because of this lack of information, industry assigns a higher risk when evaluating these basins and plays and proceeds slowly during their initial development.

Technology Lever

Performing extended, three-dimensional reservoir characterization studies of emerging plays, partnering with industry in “wells of opportunity,” sponsoring rigorously evaluated technology and geology/reservoir tests, and providing proactive technology transfer would help define and disseminate essential information of high value to the E&P industry on the “emerging” gas plays.

Impacts and Benefits

The gas plays listed on **Tables 3C-10, 3C-11 and 3C-12** are categorized as “emerging” for CBM, gas shales, and tight sands. These plays currently entail higher risks and a slower pace of development, estimated as a 30 year “stretch-out” in field development time.

Reference Case Technology removes the initial 30 year “stretch-out” in development time for the emerging plays at a rate of .5 years of reduced time delay per year for emerging plays in non-EPCA basins. The reference case removes this stretch out time at a rate of .75 years of reduced time delay per year for emerging EPCA plays. Slow Technology removes the “stretch-out” period at a rate of 0.25 years per year for non-EPCA plays and .38 years per year for EPCA plays. Rapid Technology overcomes the 30 year development “stretch-out” time faster, in at a rate of .75 years of reduced time delay per year for non-EPCA plays and at a rate of 1.13 years of reduced time delay per year for EPCA plays.

Foundation for Technology Lever

The foundation for the “Play-Specific Resource Characterization” technology lever is based on the observed industry response to a series of DOE and GRI sponsored field R&D and reservoir characterization studies in unconventional gas plays:

- DOE’s MWX field laboratory at Rulison Field, Piceance Basin, Colorado provided detailed information on the deposition continuity and properties of the lenticular Williams Fork/Mesaverde tight gas sands. Before R&D, lenticular sands were considered undevelopable. Today, the Rulison Field and the Williams Fork Formation is a multi-Tcf natural gas play.
- GRI’s reservoir characterization of the Barnett Shale at Newark Field provided essential information that has led to nearly 2,000 wells being drilled in this new very active gas shale play.
- Extensive resource characterization of Warrior Basin coalbed methane, at GRI’s Rock Creek Field Laboratory, assisted this basin to provide the first active CBM play in the country.

The specific parameter values for the technology cases for all three of the unconventional gas resources (CBM, gas shales, and tight sands) are set forth in **Table 3C-9** below:

Table 3C-9

Parameter Values for Reservoir Characterization Technologies

Technology Case	Rate of Constraint Removal
<i>Current Situation</i>	Not removed
<i>Reference Case</i>	a. .50 year reduction/year for non-EPCA plays
	b. .75 years reduction/year for EPCA plays
<i>Slow Technology</i>	a. .25 years reduction/year for non-EPCA plays
	b. .38 years reduction/year for EPCA plays
<i>Rapid Technology</i>	a. .75 years reduction/year for non-EPCA plays
	b. 1.13 years reduction/year for EPCA plays

Table 3C-10

Emerging CBM Plays and Resources

Basin	Gas Play	Undeveloped Resources (Bcf)
Appalachia	N. Basin Anticline	4,971
Illinois	Central Basin	582
Mid-Continent	Cherokee/Arkoma Basin	1,718
Uinta	Blackhawk Formation	1,290
	Sego	726
Piceance	Shallow Basin Margins	3,334
Raton	North Area	1,792
	South Area	1,176
Powder River	Central Basin	4,474
Green River	Shallow Areas	3,835
	Deep Areas	3,600

Source: Advanced Resources, International

Table 3C-11

Emerging Gas Shale Plays and Resources

Basin	Gas Plays	Undeveloped Resources (Bcf)
Appalachia	Devonian Shale - Big Sandy Extension Area	9,000
	Devonian Shale - Greater Siltstone Area	2,832
Fort Worth	Barnett Shale - Main Area	6,885*

Source: Advanced Resources, International

**New Gas Shale play added by Advanced Resources International, Inc.*

Table 3C-12

Emerging Tight Sand Plays and Resources

Basins	Gas Plays	Undeveloped Resources (Bcf)
Texas Gulf Coast	Vicksburg	4,343*
	Olmos	2,871*
Permian	Abo	1,152*
Wind River	Ft. Union/Lance Shallow	16,517*
	MV/Frontier Shallow	1,663*
Green River	Fox Hills/Lance	27,633
	Shallow MV	19,553
	Lewis	28,256
Piceance	S. BasinWF/MV	16,800*
	N. BasinWF/MV	4,200
	Iles/MV	3,246
Arkoma	Atoka	520*
N. Great Plains	Biogenic Gas, High Potential	1,796

Source: Advanced Resources, International

**New Tight Gas plays added by Advanced Resources International, Inc.*

3. Extending Reserve Growth in Existing Unconventional Gas Fields with Advanced Well Performance Diagnostics and Remediation

Background and Problem

A review of the historical data shows that proved reserves in existing unconventional gas fields grow by 2 to 4 percent per year due to adjustments and revisions stemming from uphole well recompletions, restimulation and more effective production practices. However, the pace of this non-drilling based reserve growth has been declining steadily as operators face increasing difficulties in identifying and diagnosing the problems of low recovery efficiencies and underperforming unconventional gas wells.

Technology Lever

A rigorous unconventional gas well diagnostics and remediation R&D program would provide the appropriate set of tools for evaluating and targeting problem gas wells. It would also provide a basis for designing and selecting the appropriate cost-effective well remediation technologies, helping support continued reserve growth.

Impact and Benefits

Reference Case Technology starts with a 2 percent annual reserve growth for tight sands plays with existing proved reserves and declines the level of reserve growth over 20 years. Reference Case Technology for gas shales and coalbed methane start with a 4 percent annual reserve growth (for plays with existing proved reserves) and decline the level of reserve growth over 40 years. Slow Technology provides lower and declining reserve growth, starting at 1 percent per year for tight sands and 2 percent per year for gas shales and coalbed methane. Growth in the Slow Technology case declines over 10 years for tight sands and over 20 years for gas shales and coalbed methane. Rapid Technology starts with a higher 3 percent annual growth in proved reserves for tight sands and a 6 percent growth for gas shales and coalbed methane. This growth declines over 60 years for CBM and gas shales and over 30 years for tight sands.

Foundation for Technology Lever

The foundation for the “Reserve Growth” technology lever is data from a select number of basins and areas where unconventional gas dominates natural gas production, such as W. New Mexico (with its extensive tight gas and CBM plays), Utah (also with tight gas and CBM plays), and Michigan (with its Antrim Shale gas play). These data series show that proved reserves grow at annual rate of 2% to 4% due to non-drilling based activities such as adjustments and revisions, depending on the basin and gas play, as discussed below:

- The tight gas in the E. Texas Basin (Texas Railroad District (TRR) #6) has had 509 Bcf of growth on original reserves of 5.9 Tcf or about 2% per year.
- The combined tight gas and coalbed methane play in the San Juan Basin (W. New Mexico) has had 1,845 Bcf of growth on original reserves of 13.7 Tcf or about 3% per year.
- The newer CBM and tight gas play in the Uinta Basin (Utah) and the shale gas plays in the Michigan and the Fort Worth basins (TRR #9) have seen reserve growth of 15% to 20% per year but may not be representative of the largest set of unconventional gas plays.

The specific parameter values for the technology cases are set forth in **Table 3C-13** below.

Table 3C-13

Parameter Values for Advanced Well Performance
Diagnostics and Remediation Technologies

Technology Case	Applicable Basins	Reserve Growth Factor
<i>Current Situation</i>	Basins/Plays on Tables 3C-14, 3C-15, and 3C-16	2% - 4% with Recent Declines
<i>Reference Case</i>	Basins/Plays on Tables 3C-14, 3C-15, and 3C-16	a. 2%, Declining for Tight Sands
		b. 4%, Declining for Gas Shales and Coalbed Methane
<i>Slow Technology</i>	Basins/Plays on Tables 3C-14, 3C-15, and 3C-16	a. 1%, Declining for Tight Sands
		b. 2% Declining for Gas Shales and Coalbed Methane
<i>Rapid Technology</i>	Basins/Plays on Tables 3C-14, 3C-15, and 3C-16	a. 3%, Declining for Tight Sands
		b. 6% Declining for Gas Shales and Coalbed Methane

Table 3C-14

CBM Plays With Proved Reserves

Basin	Gas Play	Proved Reserves (Bcf) 1/96	Proved Reserves (Bcf) 1/97
San Juan	North Basin (CO)	696	700
	Cavity Fairway (NM/CO)	6,170	6,157
	West Basin (NM)	586	550
	East Basin (NM)	152	150
Warrior	Shallow Basin Area	972	823
Unita	Ferron Formation	400	400
Raton	North Basin Area	0	31
	Purgatory River Area	100	249
Powder River	Shallow Basin Margin	100	150
Piceance	Divide Creek	56	52
Appalachia	Central App. Basin	1,137	1,172
Mid Continent	Cherokee & Arkoma	130	130
TOTALS		10,499	10,564

Source: Advanced Resources, International

Table 3C-15

Gas Shale Plays With Proved Reserves

Basins	Gas Plays	Proved Reserves (Bcf) 1/96	Proved Reserves (Bcf) 1/97
Appalachia	Devonian Shale - Big Sandy Central Area	1,360	1,470
	Devonian Shale - Big Sandy Extension Area	340	330
Michigan	Antrim Shale - Developing Area	1,500	2060
Fort Worth*	Barnett Shale - Main Area	208	270
TOTALS		3,408	4,130

Source: Advanced Resources, International

**New Gas Shale plays added by Advanced Resources International, Inc.*

Table 3C-16

Tight Sand Plays With Proved Reserves

<u>Basin</u>	<u>Gas Plays</u>	<u>Proved Reserves (Bcf) 1/96</u>	<u>Proved Reserves (Bcf) 1/97</u>
Appalachia	Clinton/Medina High	815	961
	Upper Devonian High	3,262	3,484
San Juan	Picture Cliffs	900	960
	Central Basin/MV	5,200	5,200
	Central Basin/Dakota	2,700	2,600
Uinta	Tertiary East	500	500
	Basin Flask MV	10	9
Piceance	S. Basin WF/MV	600	700
	N. Basin WF/MV	150	140
	Iles/MV	150	140
Green River	Fox Hills/Lance	100	500
	Lewis	200	200
	Shallow MV	1,800	1,900
	Frontier (Moxa Arch)	1,800	1,600
Wind River	Ft. Union/Lance Shallow	300	700
	MV/Frontier Shallow	300	250
Denver	Deep J Sandstone	1,000	1,050
Louisiana/Mississippi Salt	Cotton Valley	4,200	4,000
Texas Gulf Coast	Vicksburg	200	200
	Wilcox/Lobo	2,700	2,900
	Olmos	300	400
Permian	Canyon	2,700	2,900
	Abo	300	400
Anadarko	Cleveland	300	300
	Cherokee/Redfork	1,400	1,400
	Granite Wash/ Atoka	200	200
N. Great Plains	Biogenic Gas, High Potential	300	700
Arkoma	Atoka	700	600
TOTALS		33,087	34,834

Source: Advanced Resources, International

4. Improving Exploration Efficiency with Advanced Exploration and Natural Fracture Detection Technology

Background and Problem

In settings where the unconventional gas resource has sufficiently high gas concentration and is intensely naturally fractured, this resource can be produced at commercial rates. Finding these settings of high natural fracture intensity and diversity of orientation is a major technical challenge and greatly influences the economics of unconventional gas development. Since the productive areas in undeveloped plays are often difficult to identify, unconventional gas developers can drill a large number of “economically dry” wells with reserves of 0.1 Bcf per well or less. Because of these high numbers of dry and “economically dry” wells, the development success rates for new unconventional gas plays typically range from 50 to 90%.

Technology Lever

The R&D goal is to develop and demonstrate improved exploration technology to enable producers to find the best (“sweet spot”) portions of these gas basins and to improve their success rates. Sweet spots are zones in generally tight reservoirs that produce commercial quantities of oil or gas mostly due to interconnecting natural fractures. The fractures can be due to tectonic movement, and the locations and orientations of the fractures can often be estimated by understanding the local tectonic stresses and applying data analysis and modeling. The quality of a sweet spot depends on the interaction of several attributes, including fracture porosity, location along migration pathways, favorable facies and a good regional pressure seal above the target horizon.

Impacts and Benefits

Reference Case Technology addresses the question of exploration efficiency, the “c” factor in the exploration efficiency equation, and enables the industry to find the “best 30 percent” of the basin by the year 2022. Reference Case Technology also improves the success rate of the play by .2 percent per year, starting in the year 2001. For all recovery types, Slow Technology improves the success rate of the play by .1 percent per year and enables industry to find the “best 30 percent” of the basin by the year 2048. Rapid Technology enables industry to reliably find the “best 30 percent” of a basin by the year 2013 for all recovery types. For this case the drilling success rate increases by .3 percent per year, all increases starting in the year 2001.

Foundation for Technology Lever

The basic assumption is that with trial and error drilling, industry would eventually establish the higher productivity portions of a play without new technology. The development and application of natural fracture and advanced logging technology enables this “high grading” process to occur sooner. The current industry capacity to “high grade” basin areas is illustrated in Attachment A by the still limited ability to identify higher productivity areas in the Drunkard’s Wash CBM play in the Uinta Basin (Case Study 3).

The foundation for the “Exploration Efficiency” technology lever is based on the initial field demonstration of DOE-sponsored natural fracture detection R&D and improved logging technology in the southern Piceance Basin which provided an improved ability to high grade the potential drilling sites in the southern portion of the Rulison Field, as discussed in Attachment A (Case Study 1)..

The specific parameter values for the technology cases, for all three of the unconventional gas resources (CBM, gas shales, and tight sands), are set forth in **Table 3C-17** below:

Table 3C-17

**Parameter Values for Advanced Exploration
and Natural Fracture Detection Technologies**

Technology Case	Level of Exploration Efficiency	Change in Drilling Success Rate
<i>Current Status</i>	Random	50% to 90% Success Rates
<i>Reference Case</i>	Identify “Best” 30% of Play by Year 2022	Improves by .2%/year from Year 2001
<i>Slow Technology</i>	Identify “Best” 30% of Play by Year 2048	Improves by .1%/year from Year 2001
<i>Rapid Technology</i>	Identify “Best” 30% of Play by Year 2013	Improves by .3%/year from Year 2001

5. Increasing Recovery Efficiency With Geology/Technology Modeling and Matching

Background and Problem

Field development plans and operations are challenging to design for unconventional gas plays, given the complex, difficult to measure and widely varying reservoir properties. As a result, the selection and application of “best available” technology and production practices to optimize gas recovery has proven to be difficult. Fields are often developed with a variety of assumptions and “rules of thumb” about reservoir properties and technology performance, without consideration of the complex interaction of the reservoir and the chosen technology. This leads to much lower than optimum gas recoveries per well.

Technology Lever

The key task is improved understanding of unconventional gas reservoir conditions and appraisals of “best available” technology. For this, new research data on low resistivity sands, stress sensitive formations, and natural fracture patterns are essential. Also needed are advanced reservoir simulators that can properly model these complex settings and behaviors, and thus provide more reliable projections of gas recovery. These data and tools would allow more optimum selection of appropriate technology for efficient field development

Impacts and Benefits

Reference Case Technology increases recovery from new wells by at a rate of .25 percent per year for all recovery types. Slow Technology increases recovery from new wells by at a rate of .13 percent per year. Rapid Technology increases recovery per well by at a rate of .38 percent per year.

Foundation for Technology Lever

The Individual case studies in Attachment A show a steady improvement in reserves per well with increased understanding of the geologic setting and the appropriate set of technologies for optimizing gas recovery from these deposits. The assumption is that this improvement continues, but at a slower pace than in the past due to reduced R&D investments in geology and technology matching.

The specific parameter values for technology cases are summarized in **Table 3C-18** below:

Table 3C-18

Parameter Values for Geology/Technology Modeling and Matching Technologies

Technology Case	Rate of Change
<i>Current Status</i>	-
<i>Reference Case</i>	.25%/year
<i>Slow Technology</i>	.13%/year
<i>Rapid Technology</i>	.38%/year

6. Improving Well Performance With Lower Damage, More Effective Well Completions and Stimulations

Background and Problem

The permeability in CBM, gas shale and tight sand formations is easily damaged by use of chemicals, gels, drilling muds and heavy cement, leading to underperforming wells. Improving well drilling, completion and stimulation fluids and procedures would help improve recoveries from such wells, particularly in multi-zone, vertically heterogeneous formations.

Technology Lever

R&D on formation and fluid compatibility, low damage fluids such as CO₂ or N₂, improved rock mechanics and stimulation models, underbalanced drilling, and improved proppant carrying fluids, particularly for multi-zone reservoirs, could reduce formation damage, increase fracture length and placement, and increase fracture conductivity, thus improving reserves per well

Impacts and Benefits

All unconventional gas plays, because of their low permeability, would benefit from improved well completion and stimulation.

Reference Case Technology increases recovery per well at a rate of .25 percent per year for all recovery types. Slow Technology increases recovery at a rate of .13 percent per year. Rapid Technology increases recovery at a rate of .38 percent per year.

Foundation for Technology Lever

The Case studies in Attachment A show a steady improvement in reserves per well with introduction of lower damage, more effective well completion and stimulation technology. The assumption is that this improvement continues, but at a slower pace than in the past due to reduced R&D investments in advanced, multi-zone well completions technology and appropriate, non-damaging well stimulation technology.

The specific parameter values for the technology cases are summarized in **Table 3C-19** below.

Table 3C-19

Parameter Values for Lower Damage, More Effective Well Completions and Stimulations Technologies

Technology Case	Rate of Change
<i>Current Status</i>	-
<i>Reference Case</i>	.33%/year
<i>Slow Technology</i>	.28%/year
<i>Rapid Technology</i>	.38%/year

7. Lowering Well Drilling and Completion Costs with Unconventional Gas Specific Drilling and Hydraulic Fracturing R&D

Background and Problem

Well drilling and completion represent the primary capital cost items in unconventional gas development and place a high economic hurdle on these resources, particularly when these costs are assessed using discounted cash flow analysis. Lowering well drilling and stimulation costs would significantly improve the overall economics, particularly for the deeper, low permeability gas plays.

Technology Lever

R&D on advanced drilling and completion methods, particularly the use of downhole motors and modified stimulation practices, will lead to faster formation penetration rates, simpler frac fluids, and thus lower costs.

Impacts and Benefits

Well drilling and completion costs remain flat, in real terms, in all 3 technology cases.

Foundation for Technology Lever

Natural gas well costs, after declining from the mid-1980s to the mid-1990's, reversed course and have climbed significantly in the past five years, as shown below:

Table 3C-20

Natural Gas Well Drilling and Completion Costs

Year	Average Nominal Costs		Adjusted for Drilling Activity and Inflation (01 dollars)	
	Per Well	Per Foot	Per Well	Per Foot
1995	630	96	540	104
1996	622	98	566	109
1997	723	115	624	120
1998	816	128	676	131
1999	766	132	665	129
2000	684	125	661	128

Source: Advanced Resources, International

Using the activity and inflation adjusted data, natural gas well costs between 1995 and 2000 have increased by \$121,000 per well (22%) in the past five years (@ 4% per year) and by \$24 per foot (23%) in the past year. Approximately, one-half of this increase has been in the rig day-rate and the other one-half has been due to higher fuel costs and adjustments from depressed mid-1990's costs.

With rig day-rates close to replacement costs (at least for the new HP flex-rigs), we expect that continued improvements in drilling efficiencies (due to the modest level of investment in technology), will counter increases in drilling costs (in real dollars) in future years. Without investment in R&D, well costs would increase by 2% per year (in real dollars).

The specific parameter values for the technology cases are summarized in **Table 3C-21** below.

Table 3C-21

**Parameter Values for Unconventional Gas Specific
Drilling and Hydraulic Fracturing R&D**

Technology Case	Rate of Change
<i>Current Status</i>	-
<i>Reference Case</i>	-
<i>Slow Technology</i>	-
<i>Rapid Technology</i>	-

8. Lowering Water Disposal and Gas Treating Costs Through New Practices and Technologies

Background and Problem

Disposing the produced water and treating the produced methane for CO₂ and N₂ contaminants add significant costs to unconventional gas operations. Lowering these costs would improve the overall economics of the gas plays, particularly those with high water production and CO₂ content.

Technology Lever

R&D on water treatment, such as the use of electrodialysis and reverse osmosis, and improved water disposal practices, may lead to lower produced water disposal costs. R&D on gas treating, such as the use of advanced membranes, may help lower the costs of CO₂ and N₂ removal.

Impacts and Benefits

O&M costs remain flat, in real terms, in all 3 technology cases.

Foundation for Technology Lever

Natural gas well operating costs, after declining from the mid-1980s to the mid-1990s, reversed course and have increased in the past four years, as shown below:

Table 3C-22

Natural Gas Well Operating Costs Indices

Year	Inflation Adjusted Gas Recovery Operating Cost Index
1995	90.7
1996	90.9
1997	95.3
1998	98.1
1999	97.6
2000	n/a

Source: Advanced Resources, International

Using the above operating cost index data, natural gas operating costs have risen by 6.9 index points (7.6% in four years) or 2% per year.

We estimate that investment in gas and water treatment technology will counter increases in gas and water treatment O&M costs (in real dollars) in future years. Without investment in R&D, gas and water treatment costs would increase by 2% per year (in real dollars).

The specific parameter values for the technology cases are summarized **Table 3C-23** below.

Table 3C-23

**Parameter Values for New Practices & Technologies
for Water Disposal and Gas Treatment**

Technology Case	Rate of Change
<i>Current Status</i>	-
<i>Reference Case</i>	-
<i>Slow Technology</i>	-
<i>Rapid Technology</i>	-

9. Improving Recovery Efficiency With Advanced Well Drilling and Completion Technology

Background and Problem

Horizontal wells in geologically-appropriate "blanket type" tight sand formations provide improved reservoir contact and, theoretically, considerably improved recovery efficiencies and reserves per well. However, the performance of horizontal wells in tight sands has been disappointing to date, raising concerns about drilling damage and selection of geologically appropriate settings. For example, DOE supported horizontal wells at the MWX site in the Southern Piceance Basin and at Table Rock in the Eastern Greater Green River Basin turned to water after high initial gas rates.

Cavitation of CBM wells in geologically favorable "cavity fairways" provides gas production rates, reserves and recovery efficiencies far in excess of traditionally drilled, cased and hydraulically stimulated wells. However, little is known on what combination of reservoir properties is essential or favorable for cavitation, and little has been invested in cavitation science, design or operating procedures. As a result, only one "cavity fairway" has been established in the U.S. to date -- in the central San Juan Basin.

Because gas shales generally have a thick pay section, multiple productive horizons, and low vertical permeability, horizontal wells may not be a technology of choice. However, the use of multiple laterals may enable a single vertical wellbore to contact and efficiently drain a vertically thick, heterogeneous gas shale formation.

Technology Lever

Additional horizontal, multi-lateral and cavitation well R&D may help define the appropriate geologic settings for using this technology, particularly in damage sensitive, low permeability formations. DOE's R&D, including its participation in the SBIR program provides a modest level of investigation on these topics.

Impact and Benefits

The unconventional gas plays listed in **Table 3C-24** are potentially favorable for advanced well D&C technology. Reference Case Technology would help define the appropriate settings for using horizontal and multi-lateral wells by the year 2016, providing a 10% improvement in recovery efficiency, for tight gas wells and a 20% improvement for gas shale wells. Coalbed methane recovery is not improved since cavitation wells are not widely utilized. Slow Technology would lead to no change in understanding or applicability of advanced well D&C technology. Rapid Technology would introduce these technologies in 2009 for tight gas sands and gas shales. Recovery efficiency is improved by 15% in tight gas sands and by 30% in gas shale wells.

Table 3C-24

Unconventional Gas Plays Applicable for Advanced Well Drilling and Completion Technologies

Basin	Gas Play
Tight Sands	
Appalachia	Clinton/Medina High
Denver	Deep J Sandstone
Greater Green River	Shallow Mesaverde
	Frontier (Deep)

Piceance	Iles/Mesaverde
San Juan	Central Basin/Dakota
Uinta	Tertiary East
	Tertiary West
Wind River	Mesaverde/Frontier Shallow
	Mesaverde/Frontier Deep
Coalbed Methane	
San Juan	Cavity Fairway (existing)
Uinta	Ferron
Raton	Purgatory River
Piceance	Deep Coals
Green River	Deep Coals
Gas Shales	
Michigan	Antrim, Developing Area
	Antrim, Undeveloped Area
Illinois	New Albany, Developing Area
Williston	Shallow Niobrara

The specific parameter values for this technology lever are set forth below:

Table 3C-25

**Parameter Values for Advanced Well Drilling
and Completion Technologies**

Technology Case	Resource	Year Available	Improvement in Recovery per Well
<i>Reference</i>	Tight Sands	2016	+10%
	Coalbed Methane	-	-
	Gas Shales	2016	+20%
<i>Slow Technology</i>	Tight Sands	-	-
	Coalbed Methane	-	-
	Gas Shales	-	-
<i>Rapid Technology</i>	Tight Sands	2011	+15%
	Coalbed Methane	-	-
	Gas Shales	2011	+25%

Foundation for Technology Lever

The foundation for the “Advanced Drilling and Completion” technology lever is documented improvements in well performance reserves per well that have resulted from:

- Application of horizontal well drilling in “blanket” tight gas sand formations such as the Frontier Formation at Table Rock, Greater Green River Basin and several other settings.
- Application of cavity completion technology in the coalbed methane “fairway” of the San Juan Basin.
- Application of horizontal well drilling, with stimulation in the core area of the Barnett Shale in the Fort Worth Basin.

10. Improving and Accelerating Gas Production With Other (“Breakthrough”) Unconventional Gas Technologies

Background and Problem

A variety of longer-term and advanced “breakthrough” technologies could further improve the performance of unconventional gas plays and wells. For example, laboratory tests demonstrate that injection of adsorbing gases such as CO₂ and N₂ into coal seams and other unconventional gas formations can improve and accelerate the desorption and production of natural gas. However, major questions remain as to how the injected gases will flow in the reservoir, how effectively these injected gases will contact and displace methane adsorbed on the coals, and how to cost-efficiently treat the produced methane/injected gas mixtures. All basins and gas plays are potentially candidates for breakthrough technologies.

Technology Lever

A fundamental and comprehensive R&D program involving geologic, laboratory, and field studies of enhanced unconventional gas recovery (similar to those underway for enhanced oil recovery) would provide industry the basic information on the feasibility of and appropriate settings for potential breakthrough technologies.

Impacts and Benefits

Reference Case Technology does not introduce breakthrough technology by year 2025. Slow Technology does not introduce breakthrough technology. Rapid Technology introduces more efficient breakthrough technologies that improve recovery efficiency per well by 15% for tight sands, and 45% for coalbed methane. This new technology is introduced in 2016.

The specific parameter values for the enhanced technology cases are set forth in **Table 3C-26** below.

Table 3C-26

**Parameter Values for Other Unconventional Gas Technologies
Improving & Accelerating Gas Production**

Technology Case	Resource	Year Available	Recovery Efficiency
<i>Current Status</i>			As Calculated
<i>Reference Case</i>	All	Not Available	-
<i>Slow Technology</i>	All	Not Available	-
<i>Rapid Technology</i>	Tight Sands	2016	15%
	Coalbed Methane	2016	45%
	Gas Shales	Not Available	-

Foundation for Technology Lever

The foundation for the “Breakthrough Technologies” lever is expert judgement. It is assumed that, under an aggressive “Rapid Technology progress world,” enhanced tight sands and coalbed methane technology, such as the injection of CO₂, will lead to significantly improved recovery from unconventional gas reservoirs and wells.

11. Mitigating Environmental and Other Constraints on Development

Background and Problem

Development of unconventional gas, particularly in the Rocky Mountain basins, is constrained by concerns over air quality, land disturbance, water disposal and restricted Federal land and wilderness set-asides. These environmental and access constraints significantly slow the pace of drilling and, in some cases, exclude high potential areas from development.

Technology Lever

Federal lands legislatively excluded from access are set as “off limits” for development. Less severe development constraints may be mitigated or overcome by in-depth environmental assessments of the major constraints, the introduction of environmentally enhanced E&P technology such as low NO_x compressors, improved water treatment and environmentally neutral disposal methods, and the drilling of multiple, directional wells from a single well pad.

Impacts and Benefits

For those plays not included in the EPCA assessment, Reference Case Technology removes non-legislative development constraints in 35 years, starting in the year 2001. For those plays included in the EPCA assessment, the removal rate varies among the plays. Slow Technology removes these development constraints in 50% greater number of years than Reference Case Technology. Rapid Technology removes these constraints in 50% fewer number of years.

The parameter values for the technology cases for all three of the unconventional gas resources(CBM, gas shales and tight sands) are summarized in **Table 3C-27** below.

Table 3C-27

**Technology Parameters for Technologies
Mitigating Environmental & Other Constraints on Development**

Technology Situation		Environmental (EV) and Other Constraints
<i>Current Status</i>	Non-EPCA Plays	35% of Area Excluded
	EPCA Plays	Variable Excluded Areas
<i>Reference Case</i>	Non-EPCA Plays	Removal in 35 years: 1%/year
	EPCA Plays	Variable Rate of Removal
<i>Slow Technology</i>	All Plays	50% Slower Removal than Reference
<i>Rapid Technology</i>	All Plays	50% Faster Removal than Reference

Foundation for Technology Lever

The parameters regarding access and development constraints for the EPCA plays are based on the EPCA assessment and studies underlying the assessment. For the non-EPCA plays, these parameters are based on expert judgement.

Attachment A

Case Studies of Technology Progress

1. Tight Gas Sands. Piceance Basin, Colorado
Williams Fork/Mesaverde Formation
2. Gas Shales. Fort Worth Basin, North Texas
Barnett Shale Formation
3. Coalbed Methane. Uinta Basin, Utah
Ferron Coal Trend

CASE STUDIES OF TECHNOLOGY PROGRESS

In support of the overall assessment of technology progress in the UGRSS, there are assembled a series of "case studies." These case studies illustrate how technology, in aggregate, has changed the performance and costs of key unconventional gas plays.

The case studies of technology progress discussed in this report represent three major tight gas, gas shales and coalbed methane plays in the UGRSS data base.

1. *Tight Gas Sands.* The recent development of the multi-Tcf size tight gas sands accumulation in southern Piceance Basin, Colorado, in the Williams Fork (Mesaverde) Formation.
2. *Gas Shales.* The active development of the recently estimated (by Devon Energy, the field's operator) 10 to 20 Tcf of technically recoverable natural gas in the Barnett Shale of the Fort Worth Basin.
3. *Coalbed Methane.* The development of coalbed methane in what has become Utah's largest natural gas and fastest growing natural gas play, the Ferron coals of the Uinta Basin.

Each of these case studies illustrates a different aspect of technology progress in unconventional natural gas exploration and development. And, each provides guidelines for establishing the technology levers to be used in UGRSS.

CASE STUDY 1.

TIGHT GAS SANDS, PICENACE BASIN, COLORADO

WILLIAMS FORK FORMATION/MESAVERDE

1. Background. The Piceance Basin contains a thick package of vertically stacked, lenticular sands in the Williams Fork/Mesaverde Formation. These tight gas sands contain an impressive volume of gas in place, estimated at 300+ Tcf (Johnson and Others, 1987; ARI, 1997). Until recently, these sands were thought to be low productivity, high cost resources.

Regional geologic studies by the petroleum industry and the U.S. Geological Survey and detailed reservoir characterization at the MWX/Rulison Field site were instrumental in changing the outlook. These studies demonstrated that the basin-center Williams Fork Formation is widely gas charged and can be successfully developed in areas where thick, stacked sands and natural fractures coexist. Over the last decade, and particularly within the past five years, the integrated application of new E&P technologies has turned this uneconomic tight gas resource into an active, profitable gas play. Today, these lenticular sands are the primary tight gas target in the Piceance Basin.

The improved economics, due mainly to higher reserves per well, are responsible for the Williams Fork/Mesaverde tight gas play in the southern Piceance Basin. During the 1980s, this gas play had only low productivity wells, mostly uphole completions or "bail-outs" of unproductive deeper targets. Today, over 1,200 wells have been drilled and produce nearly 300 MMcfd from these Williams Fork stacked lenticular tight gas sands. Four fields account for the great bulk of activity, Figure 3C-2:


- Rulison Field, with 293 active (310 total) wells and producing 88 MMcfd, leads the way.
- Grand Valley Field, with 327 active (334 total) wells and producing 87 MMcfd, has been the most active field in this gas play.
- Parachute Field, with 125 active (and total) wells and producing 48 MMcfd, establishes this gas play on the west.
- Mamm Creek Field, with 347 active (355 total) wells and producing 64 MMcfd, establishes this gas play on the east.

Most likely this tight gas sands development area will continue to grow, as the ultimate boundaries and remaining "sweet spots" of the Williams Fork tight sands are yet to be defined.

2. Natural Gas Development. The Juhan #1 Rulison discovery well, drilled in the late 1950s (Sec. 26, T6S R94W), had strong initial gas flows, giving expectations that the Williams Fork would become a new, economically attractive natural gas play. When subsequent wells proved to be much less productive, with reserves of 0.2 to 0.5 Bcf per well, the play was abandoned in search of deeper Mesaverde Group sands.

The redevelopment of the Williams Fork/Mesaverde began in the 1990s and has continued strong through today. Currently, 1,092 active wells produce 288 MMcfd, with 216 of these wells brought on production in 2002 and early 2003. To date, the Williams Fork has produced over 500 Bcf, from the Rulison, Grand Valley/Parachute, and Mamm Creek fields and is headed toward a multi-Tcf natural gas play. Table 3C-28 provides a summary of the development status and historical well performance for the four major Williams Fork Formation gas fields of the Piceance Basin, as of mid-2003.

Figure 3C-2. Major Williams Fork Formation Natural Gas Field Locations, Southern Piceance Basin.

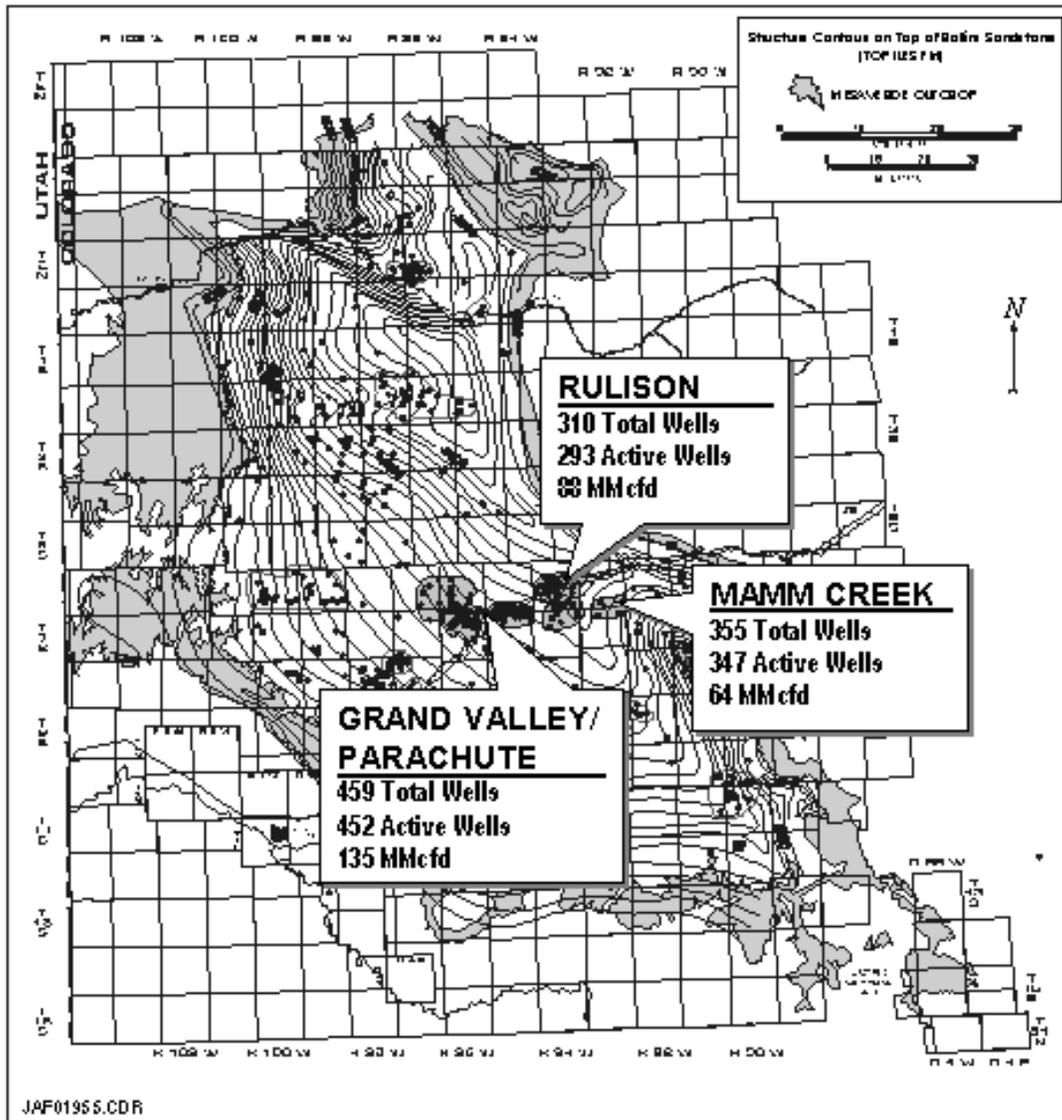

Source: Advanced Resources, International

Table 3C-28

Gas Development and Well Performance
Williams Fork Formation Gas Fields, Piceance Basin

Field	Total Wells	Active Wells	New Wells (2002-2003)	Gas Recovery		Well Performance	
				Cumulative (Bcf)	Estimated Ultimate (Bcf)	Cumulative/Well (Bcf)	EUR/Well (Bcf)
Rulison	310	293	56	186	450	0.62	1.48
Grand Valley	334	327	66	160	410	0.48	1.25
Parachute	125	125	58	54	300	0.43	1.55
Mamm Creek	355	347	36	111	190	0.32	0.86
Total	1,124	1,092	216	511	1,350		

Source: Advanced Resources, International

3. Technology Progress Levers.

a. Gas Recovery Per Well. The single most important technology progress measure for tight gas sands is improvement in gas recovery per well. Application of advanced well logging practices, lower damaging well completion methods, and higher efficiency hydraulic fracturing technology have led to progressive improvements in well performance for the Williams Fork tight gas sand fields in the southern portion of the Piceance Basin, measured in terms of estimated ultimate recovery (EUR) per well.

The well performance in these fields is shown in Table 3C-29 below for four key time periods, starting with the initial group of wells drilled before active development of these fields began in the mid-1990s.

Table 3C-29

Well Performance and Technology Progress
Williams Fork Formation Gas Fields, Piceance Basin.

Time Period	Number of Successful Wells	EUR/Successful Well (Bcf)	
		Mean	F50
Pre-1995	181	0.79	0.55
1995-1998	270	0.98	0.90
1999-2001	428	1.12	1.07
1/2002-6/2002	103	1.98	1.90
Recent	113	n/a	n/a
TOTAL	1,095		


Source: Advanced Resources, International

Figure 3C-3 provides the distribution in well performance for the same four time periods, including the active well drilling during the first half of year 2002. As additional production data are obtained on the more recently drilled 113 wells, these wells will be added to the year 2002 performance time period.

The analysis of changes in well performance, due to improved knowledge and technology, shows that the mean EUR per well has improved steadily from 0.79 Bcf for the pre-1995 wells to 1.98 Bcf for the year 2002 wells. (Using the F50 (median) well performance value shows even greater, three-fold improvement in well performance between the initial group of pre-1995 wells and the year 2002 wells.)

b. Dry Holes. While dry holes, particularly "economic dry holes" (wells with ultimate gas recovery of less than 0.1 Bcf) are not a major consideration in this tight gas play, the data show a steady improvement in this technology progress factor, as shown in Table 3C-30.

Figure 3C-3. Well Performance and Technology Progress, Williams Fork Formation Gas Fields, Piceance Basin.

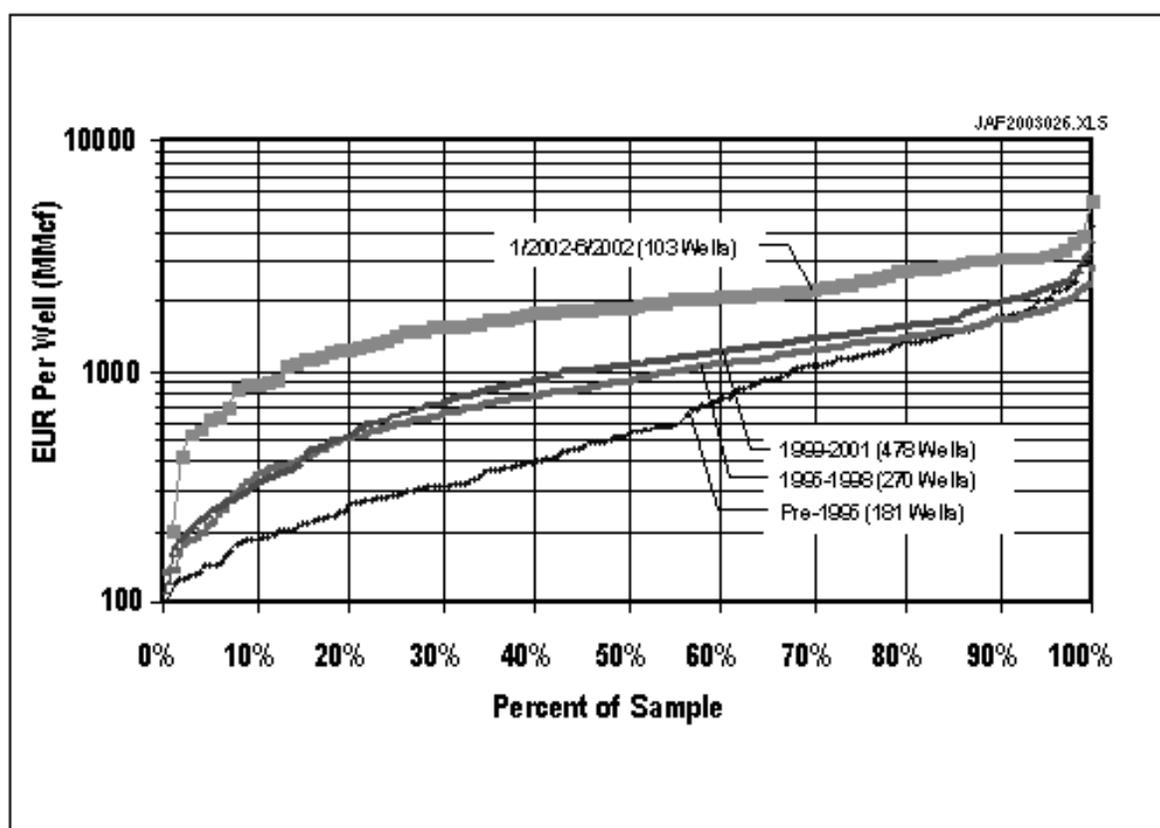

Source: Advanced Resources, International

Table 3C-30

Dry Hole Rate and Technology Progress
Williams Fork Formation Gas Fields, Piceance Basin

Time Period	Total Wells	Successful Wells	Dry Holes	% Successful
Pre-1995	199	181	17	91%
1995-1998	279	270	9	97%
1999-2001	430	428	2	99%
1/2002-6/2002	103	103	-	100%
Recent	113	113	-	N/a
TOTAL	1,124	1095	28	

Source: Advanced Resources, International

The analysis of the change in dry hole rates, due to improved knowledge and technology, shows that the dry hole rate has steadily declined from 9% for the pre-1995 wells to essentially zero for wells drilled since 1998.

c. Recompletion-Based Reserve Growth. An aggressive program of well recompletions and completion of behind-pipe formations has enabled these four fields to add 84 Bcf of reserve growth-based reserves, as shown in Table 3C-31.

Table 3C-31

Reserve Growth and Technology Progress
Williams Fork Formation Gas Fields, Piceance Basin

Time Period of Original Well	Number of Well Recompletions	Reserve Growth Additions (Bcf)
Pre-1995	93	72
1995-1998	20	12
1999-2001	-	-

Source: Advanced Resources, International

The recompletion program has added approximately 10% to the original proved reserves in these four tight gas fields but, more importantly, has significantly improved the performance of wells that were considered marginal or uneconomic based on their original completion.

d. Natural Fracture Prediction. A major natural fracture prediction R&D project was conducted in the Williams Fork tight sands of the Rulison Field. The project, using a combination of 3-D seismic, coherency mapping and a geomechanical stress model, identified a natural fracture cluster area (a permeability "sweet spot") that covers three sections in the southern portion of the Rulison Field (Figure 3C-4).

Wells drilled in this "sweet spot" area of the southern Rulison Field have reserves two or more times higher than reserves for wells drilled outside this area, giving confidence that "tight gas sand selectivity technology" could be developed and applied to future tight sand exploration and production.

e. Field Development and Well Spacing. An active program of intensive infill development is underway in the Williams Fork tight gas sands of the Rulison Field. In Section 20 (T6S, R94W) of this field, the operator has initiated a 20 acre per well (32 wells per section) field development and well spacing pilot (Figure 3C-5). Subsequently, the field operator has applied for and has begun an even more intensive development, adding additional wells, further reducing the spacing to 16 acres per well, on the way to a 10 acre per well test. The results of this pilot have been encouraging and indicate steadily increasing natural gas recoveries from this infill program, Table 3C-32 below:

Table 3C-32
Intensive Field Development and Technology Progress
Williams Fork Formation. (Sec. 20, T6S, 94W, Rulison)

Date	Wells and Spacing	Reserves/ Well* (Bcf)	Total Reserves (Bcf)
Initial	First 2 wells @320A/W**	2.1	4
1994	Next 2 wells @160 A/W	2.2	4
1995	Next 4 wells @80 A/W	1.9	8
1996-1997	Next 6 wells @40 A/W	1.7	10
1997-2000	Next 16 @20A/W	1.7	28
2001-2002	Next 10 wells (@ 16 A/W)	2.0	20
TOTAL (40 wells)		1.85	74


* Estimated Based on History Matching With ARI-Tight Type Curve Model.

** After subsequent well recompletions.

Source: Advanced Resources, International

4. Summary. The cumulative effects of the technology progress actions discussed in this case study, have greatly improved the economic potential of the Williams Fork Formation tight gas field at Rulison and similar tight gas fields in the southern Piceance Basin. In addition, as is being demonstrated in the Rulison Field, the combined application of improved technology and intensive resource development has the potential to convert a modest and marginal gas 90 Bcf prospect into a major multi-Tcf natural gas field, as shown in Table 3C-33.

Figure 3C-4. Geomechanics and 3-D Seismic Based Technology Progress, Williams Fork Formation

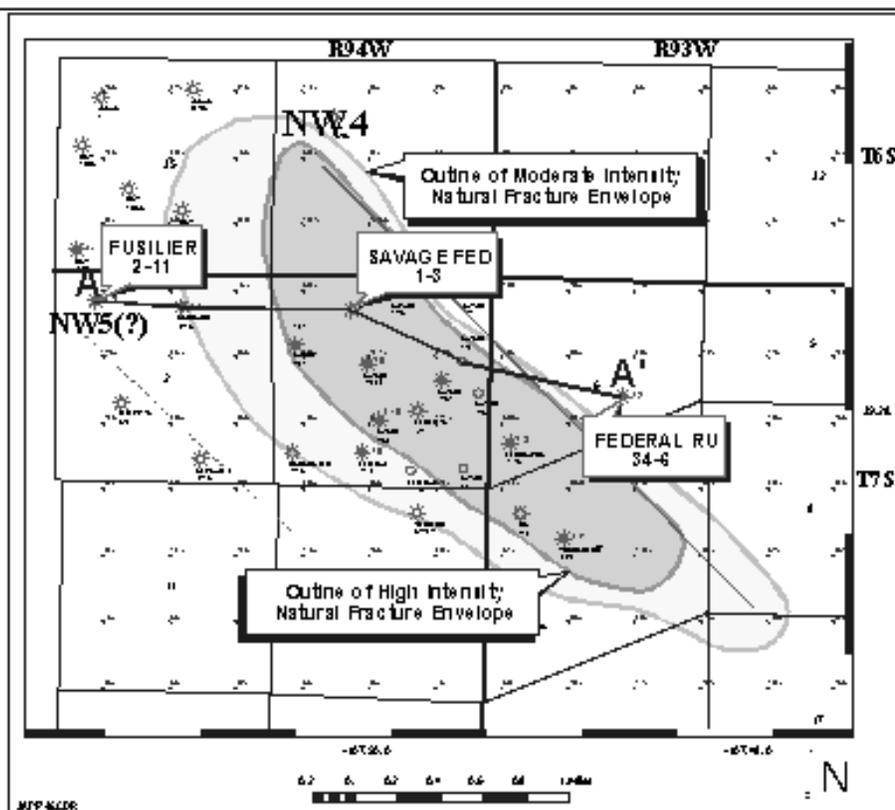


Results of Geomechanics/3-D Seismic Technology Test

Natural Fracture Cluster Area	Cum. Recovery (Bcf)	Est. Ult. Recovery (Bcf)
Inside Envelope (12 wells)		2.5 Bcf/Well
• Savage Fed 1-3	2.0	2.8
Outside Envelope (23 wells)		1.2 Bcf/Well
• Fed. RU 34-6	0.2	0.3
• Fusiler 2-11	0.8	1.5

Source: Advanced Resources, International

Figure 3C-5. Location of Intensive Field Development Pilot, Section 20 Rubison Field.

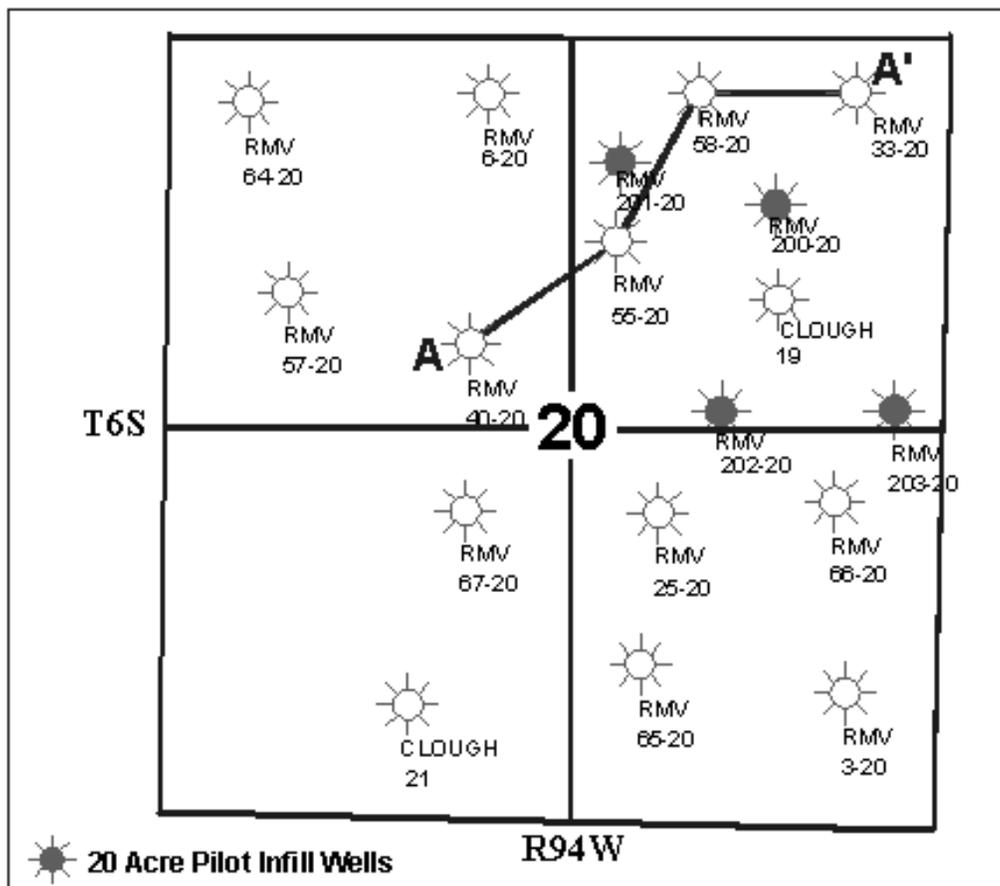

Source: Advanced Resources, International

Table 3C-33

**Impact of Technology Progress and Intensive
Resource Development, Rulison Field, Piceance Basin.**

Field Development Options	Well Spacing (A/W)	No. of Locations*	Success Rate (%)	Reserves/Well (Bcf)	Reserves/Section (Bcf)	Potential Field Size (Bcf)
Historical Practices	160	120	91	0.79	3	90
Advanced Strategy	16	1,200	99	1.85	74	2,200

*Assuming 30 square mile productive field area.

Source: Advanced Resources, International

CASE STUDY 2.
GAS SHALES, FORT WORTH BASIN, NORTH TEXAS
BARNETT SHALE FORMATION

1. Background. The Fort Worth Basin holds the Mississippian-age Barnett Shale, an organically rich, low-permeability unconventional gas accumulation (Figure 3C-6). These gas shales are estimated to hold 120 Tcf of gas in-place, based on recent estimates prepared by Devon Energy (Petroleum News, May 2003).

In the early 1990s, the Gas Research Institute supported a series of reservoir characterization and engineering studies that contributed significantly to improved understanding the gas storage mechanisms and gas production for this new gas play. Resource assessments by the USGS (USGS, 1995) and a subsequent USGS open-file study (Schmoker, 1996) provided the initial information on the resource potential of the Barnett Shale gas accumulation, estimating its technically recoverable resource potential at a modest 1 to 3 Tcf. A subsequent combined Advanced Resources and USGS joint study, published in the Oil and Gas Journal (Kuuskraa, 1998), updated the well performance and understanding of the actual drainage being achieved by wells in this gas play. The study set forth that the Barnett Shale might hold 10 Tcf of technically recoverable natural gas, greatly raising the visibility of this potential gas resource.


Today, Devon Energy, the Barnett shale's dominant producer with 10 times more production than any other operator, estimates that:

- Potentially 10 Tcf, or 8% of the estimated 120 Tcf of gas in-place, can be recovered using current technologies; and,
- Another 10 to 12 Tcf, or 8% to 10% of the gas in-place, may be recoverable with advanced technology, particularly with the use of horizontal, fraced wells.

2. Natural Gas Development. The development of the Barnett Shale began in the mid-1980s in the Newark East Field currently the primary natural gas field in the Barnett Shale gas play. Development progressed slowly as the early wells had low reserves, with an occasional high productivity well.

With steadily improving results based on using "light sand fracs" and completing a larger shale interval, starting in the mid-1990s, drilling in the Barnett shale accelerated. Today, nearly 1,800 wells have been drilled into the Barnett Shale, with gas production reaching 550 MMcfd. To date, the Barnett shale has produced a cumulative of over 600 Bcf. Table 3C-34 below provides a summary of Barnett Shale natural gas production and development through the end of 2002.

Figure 3C-6. Barnett Shale Development Area, Fort Worth Basin, North Texas.

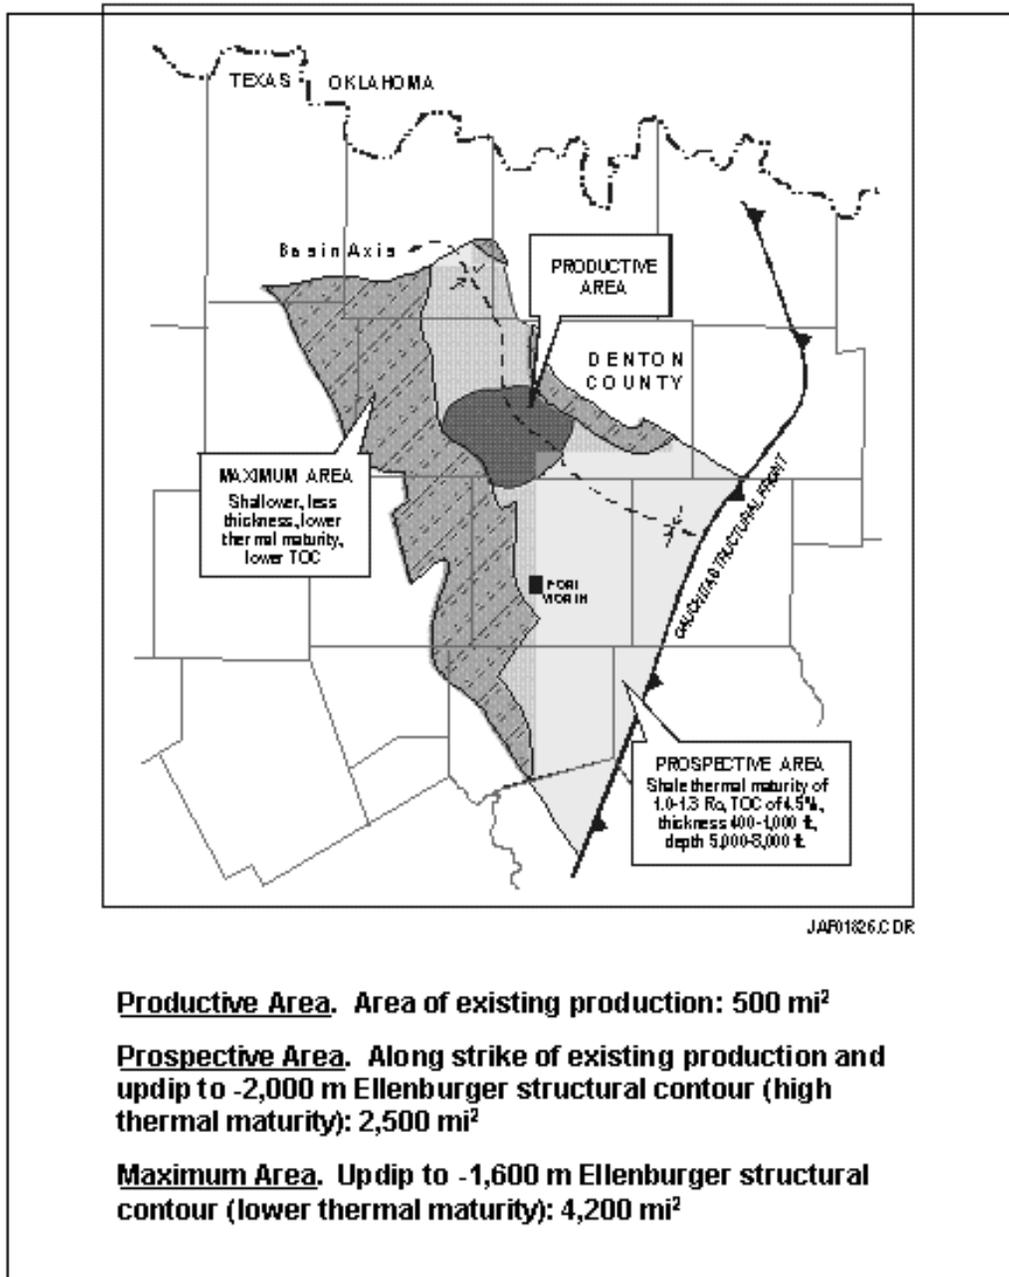

Source: Advanced Resources, International

Table 3C-34

Growth in Barnett Shale Production and Wells

Time Period	Annual Production (Bcf)	Cumulative Production (Bcf)	End of Year Producing Wells
1990	3	12	66
1995	20	70	242
1999	40	198	517
2000	78	276	698
2001	131	407	1,171
2002	202	609	1,771

Source: Advanced Resources, International

3. Technology Progress Levers

a. Gas Recovery Per Well. Gas recovery per well has steadily improved as operators have changed their well completion practices by completing a larger portion of the shale interval (adding the Upper Barnett zone to the Lower Barnett zone), by introducing more effective (and lower cost) "light sand frac" technology, and by refracing previously completed wells.

The combined application of these technologies have enabled well performance, the key technology progress parameter, to steadily improve with time, as set forth in Table 3C-35 below.


Table 3C-35

Well Performance and Technology Progress
Barnett Shale, Fort Worth Basin.

Time Period	Average EUR/Well (Bcf)
Initial Wells (74 wells, 1985-1989)	0.35
Subsequent Wells (180 wells, 1985-1995)	0.86
All Wells (1,909 wells, 1985-2002)	1.23

Source: Advanced Resources, International

Using a separate data set of wells, Figure 3C-7 shows that the well performance for the middle 40% of the wells has increased from 0.5 Bcf for the 87 producing wells drilled through 1990 to 1.1 Bcf for all 1,909 producing drilled through 2002.

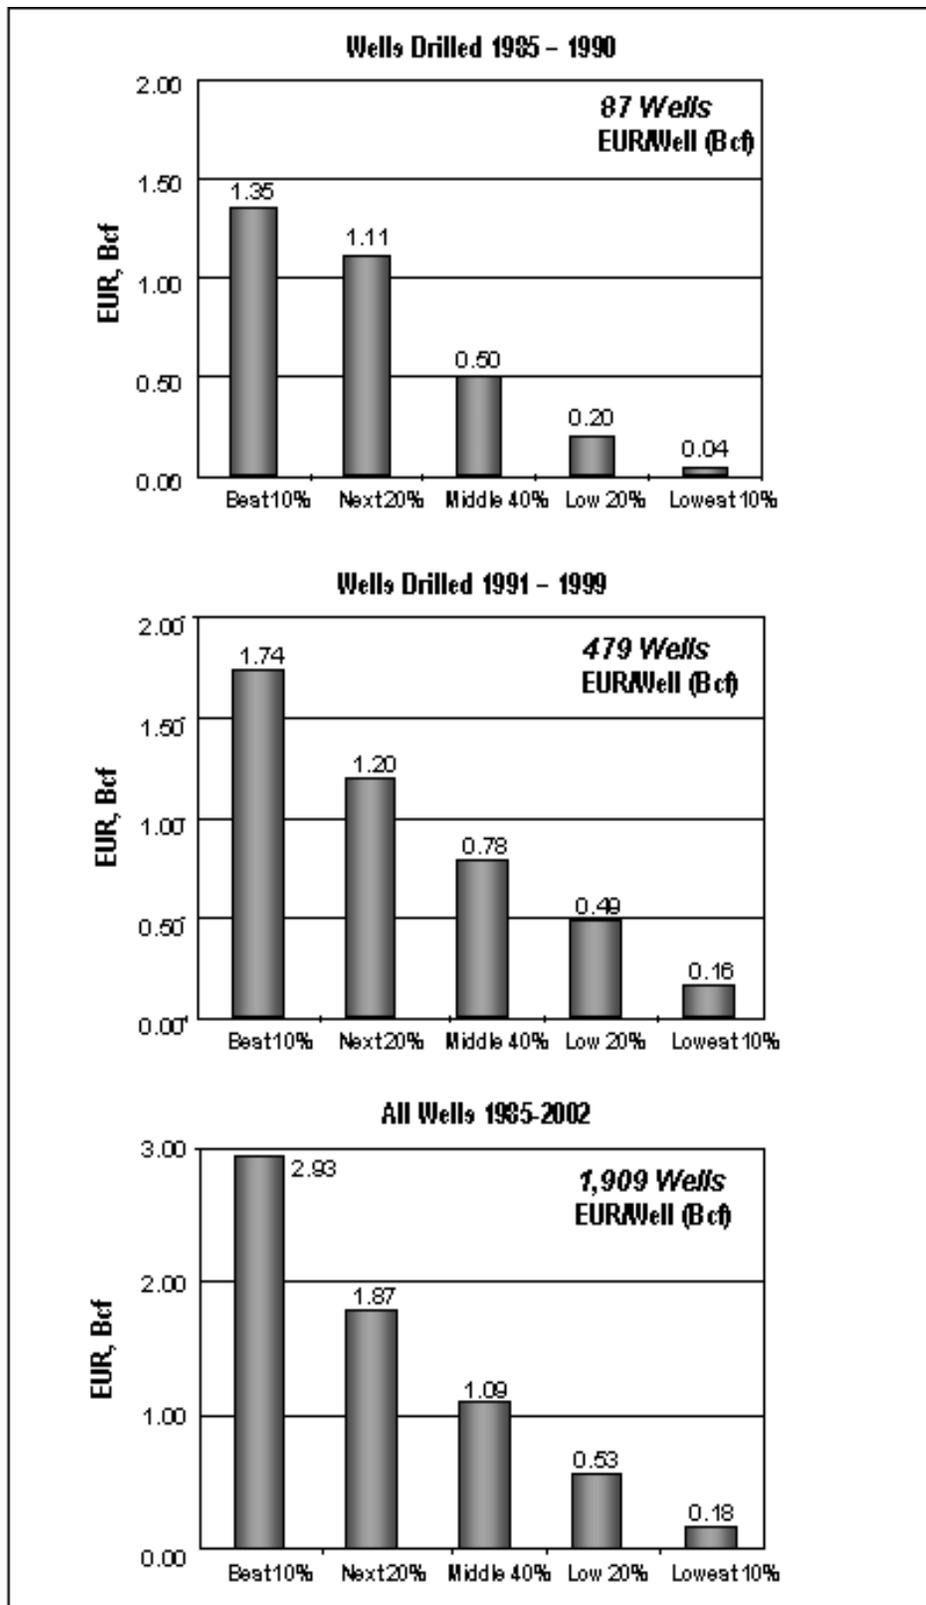

Source: Advanced Resources, International

Figure 3C-7. Gas Recovery Per Well and Technology Progress, Barnett Shale, Fort Worth Basin.

b. Success Rate. The success rate, another important technology progress parameter, has improved from 86% (150/180) for the initial 180 wells drilled through 1996 to 96% (1,909/1985) for all Barnett shale wells drilled to date.

c. Recompletion Based Reserve Growth. Considerable recompletion and refracturing has taken and is taking place in the Barnett Shale, particularly for the older wells. Table 3C-36, that provides the original and the latest distribution of well performance for the 87 wells drilled between 1985 and 1990, shows that application of this technology has improved performance for the middle 40% of these wells from 0.50 Bcf/well, as originally completed, to 1.44 Bcf/well after recompletion and refracturing.

Table 3C-36

Well Recompletion Based Reserve Growth and Technology Progress, Barnett Shale, Fort Worth Basin.

Distribution	As Originally Completed (First 87 Wells Drilled 1985-1990) EUR/Well	After Recompletion (First 87 Wells Drilled 1985-1990) EUR/Well
Top 10%	1.35	3.50
20%	1.11	2.41
Middle 40%	0.50	1.44
20%	0.20	0.54
Bottom 10%	0.04	0.04

Source: Advanced Resources, International

d. General Resource Growth. The estimated ultimate size of the Barnett Shale gas resource has steadily increased, as the understanding of this gas play has grown, as well performance has improved, and as the field has been more intensely developed, on smaller well spacings. Table 3C-37 shows the steady progress in the estimated technically recoverable resource for the Barnett Shale, from 1.4 Tcf in 1990, to 3.4 Tcf in 1996, and to 10 Tcf in 1998.

Recently, based on still additional improvements in well performance (as discussed above), even more intensive development (well spacing of 27 acres per well), and expansion in the defined areal extent of the productive area, this gas play's primary operator, Devon Energy, places the technically recoverable potential of the Barnett Shale at 20 Tcf.

Table 3C-37

Increase in Resource Size/Productivity and Technology Progress, Barnett Shale, Fort Worth Basin

Time Period	Initial* Assessment, 1990	USGS Special* Assessment, 1996	Latest Assessment, 1998**
Development Intensity (Acres/Well)	320	320	80 to 320
Completed Wells			
Productive	74	180	300
Unproductive	12	30	50
Play Area, Square Miles	2,439	2,439	2,439
Future Wells	4,792	4,668	10,148
Success Rate	0.86	0.86	0.86
EUR/Well (Bcf)	0.35	0.84	0.35 to 1.50
Technically Recoverable Resources (Tcf)	1.4	3.4	10.0

*Source: USGS (1990, 1996)

**Source: Advanced Resources, International/USGS, 1998

e. Lower Well Costs. Improved drilling and completion practices and substitution of new "light sand frac" technology for previous high cost gelled fluids and large volume sand treatments, steadily reduced overall well drilling and completion costs even as a large shale interval is being completed. Increasing rig day rates drove well drilling and completion costs back up in 2001 to nearly \$900,000 per well. Since then improvements in rig efficiency and lower infrastructure costs for infill wells are, once again, enabling drilling and completion costs to decline to a projected \$750,000 per well, Figure 3C-8.

f. Horizontal Wells. Horizontal well technology is starting to be applied in the Barnett Shale. While it is still too early to conclusively establish its performance, early indications based on gas flow rates are encouraging. The horizontal wells drilled to date have initial flow rates two to four times of a vertical well with well drilling and completion costs about two times a vertical well.

Devon has announced that it would drill 50 horizontal wells into the Barnett Shale in 2003, with seven horizontal wells already on line, producing an aggregate 15 MMcfd. Approximately half of the new horizontal wells would be drilled in Devon's core area at Newark East field, in Wise and Denton Counties of North Texas, the dominant Barnett Shale gas field. The remainder of the horizontal wells would be used to establish the viability of the relatively unexplored areas outside the core areas.


4. SUMMARY. The overall progress in Barnett Shale development technology, including improved well performance, lower costs and intense resource development, is summarized in Table 3C-38.

- Finding and development (F&D) costs, the overall well critical technology progress measure, has declined for the Barnett Shale by three fold, from a range of \$1.50 to \$2.00 per Mcf for the initial wells (drilled in the late 1980s) to about \$0.75 per Mcf for wells drilled in 2001 and 2002. Further reductions in F&D costs are projected, by the field's

operator, for 2003.

- Reserves per well have steadily increased from about 0.5 Bcf per well for the initial wells to 1.2 Bcf per well for recent wells. Assuming continued improvements in completion technology the average recovery per well could reach 2 Bcf over the full impact of the refrac program is realized in both previously drilled and newly drilled wells.
- Improvements in rig efficiencies and use of lower cost, more effective fracturing technology are helping counter increased rig day rates, helping to hold down overall well D&C costs.

Figure 3C-8. Drilling Costs and Technology Progress, Barnett Shale, Fort Worth Basin.

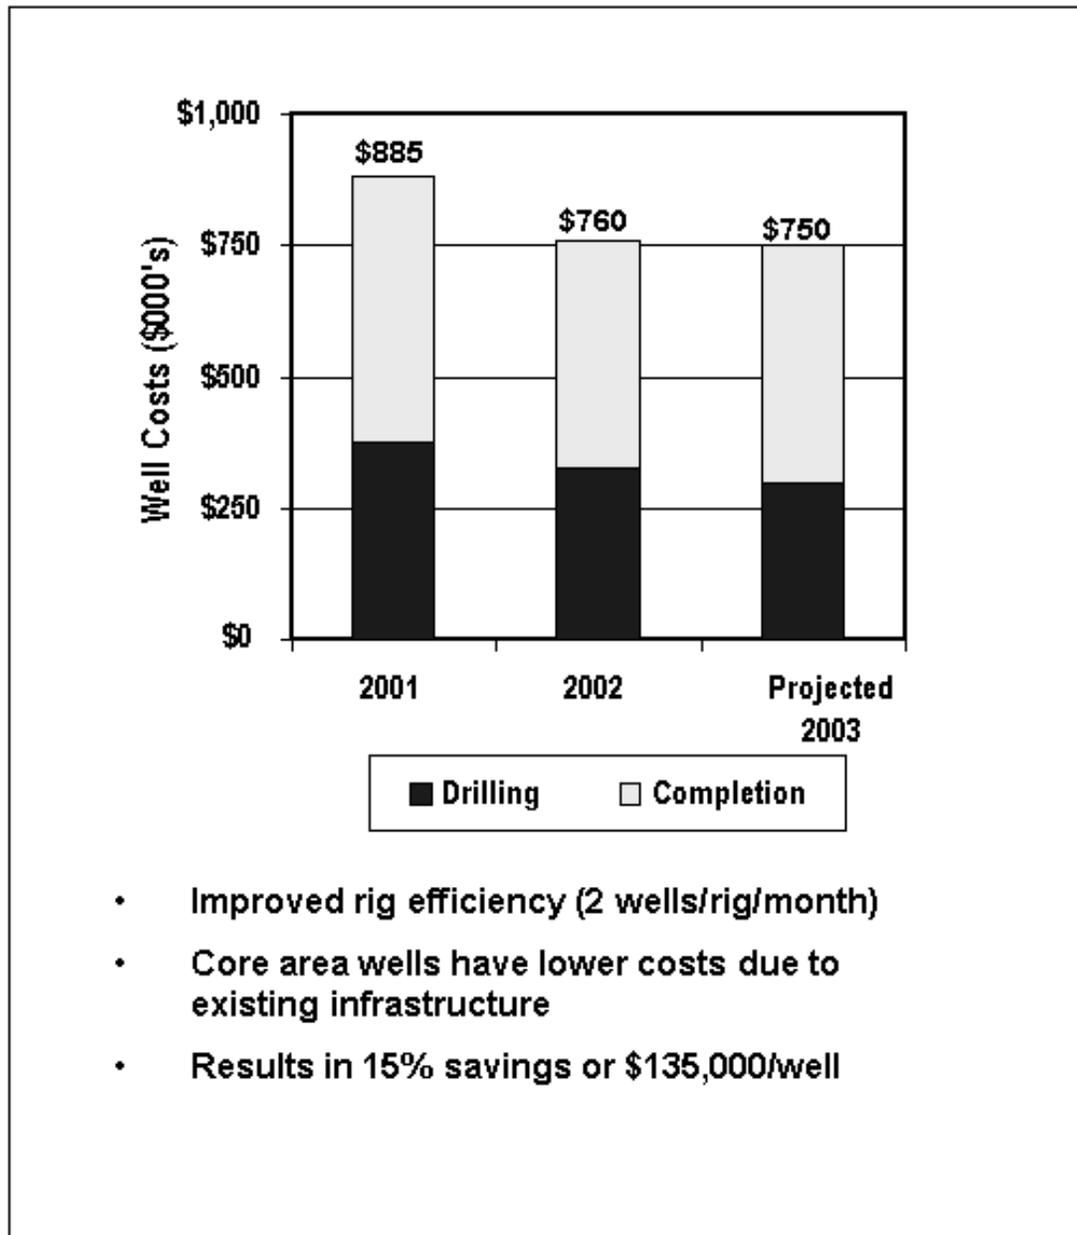

Source: Advanced Resources, International

Table 3C-38

**Impact of Technology Progress and Improved Well
Drilling and Completions, Newark East Field, Fort Worth Basin.**

Time Period	Pre-1991	1991-95	1996-2000	2001-02	2003
No. Producing Wells	66	176	456	1,073	n/a
Well Spacing	320 acres	160-320 acres	55-110 acres	27-55 acres	27 acres
Completion Interval	L. Barnett	L. Barnett	U./L. Barnett	U./L. Barnett	U/L Barnett
Progress in Drilling and Completion Technology	Variety of Completion Practices	MHF Technology	Introduction of Waterfrac Technology	Widespread Use of Waterfracs	Improved Rig Efficiencies
Typical Well Cost	\$600-\$1,000K	\$600-\$850K	\$500-\$750K	\$750-\$900K	\$700-\$800K(e)
Typical Well EUR	0.4-0.5 Bcf	0.8 Bcf	1.0 Bcf	1.0-1.2 Bcf	1.25 Bcf
F&D Costs	\$1.50-\$2.00	\$0.75-\$1.10	\$0.50-\$0.75	\$0.75	\$0.60(e)

Source: Advanced Resources, International

**CASE STUDY 3.
COALBED METHANE, UINTA BASIN, UTAH
FERRON COAL TREND**

1. Background. The Uinta Basin contains a thick section of Upper Cretaceous coals within the Ferron Sandstone Member of the Mancos Shale (Figure 3C-9). These coals have been estimated to contain on the order of 10 Tcf of gas in-place (Advanced Resources, 1996). Prior to 1990, these coals were bypassed in search of deeper conventional sandstone reservoirs.

Early resource characterization studies (sponsored by the Gas Research Institute) began to provide some of the basic reservoir data for this new gas play, such as gas content, coal depth and coal thickness. These studies and core data showed that the gas content of the coals decreased dramatically from north to south, independent of the rank and maturity of the coals. Regional mapping also indicated that the productive areas are associated with the updip stratigraphic pinchouts where the tight marine shales provide a seal enabling the coals to become "supercharged" with biogenic and migrated thermogenic gas from the southern basin margin.

Improved understanding of this gas play, including advanced well completion technology has led to steadily increasing reserves per well from the coalbed methane play in this basin. Today, over 600 well have been drilled and produce 250 MMcfd from the Ferron coalbed methane trend. The Drunkards Wash Field, in the northern portion of the Ferron Coal Trend accounts for the great bulk of the wells and gas production (Figure 3C-10).

2. Natural Gas Development. The Ferron coalbed methane play was discovered in 1988 by Texaco E&P, Inc. at the northern end of the Ferron Trend, near Price. After several years of inactivity, Texaco and others began active exploration in the mid-1990s.

To date the Ferron CBM play has produced a cumulative of 400 Bcf, and has proved reserves of 1,700 Bcf, making this a multi-Tcf giant natural gas play, primarily from Drunkards Wash, Helper and Buzzards Bench fields.

a. Ability to Identify Higher Productivity Well Performance Areas. Table 3C-39 provides a summary of the well drilling and well performance for the Drunkards Wash CBM field as of the end of 2002.


Table 3C-39

Well Performance Selectivity and Technology Progress
Drunkard's Wash CBM Field, Uinta Basin.

Time Period	Number of Successful Wells	Mean EUR/Successful Well (Bcf)
Pre-1995	78	3.4
1995-1998	103	2.7
1999-2000	149	2.0
2001	78	1.7
TOTAL	407	


Source: Advanced Resources, International

Figure 3C-9. Drunkard's Wash Ferron Coalbed Methane Field, East-Central Utah

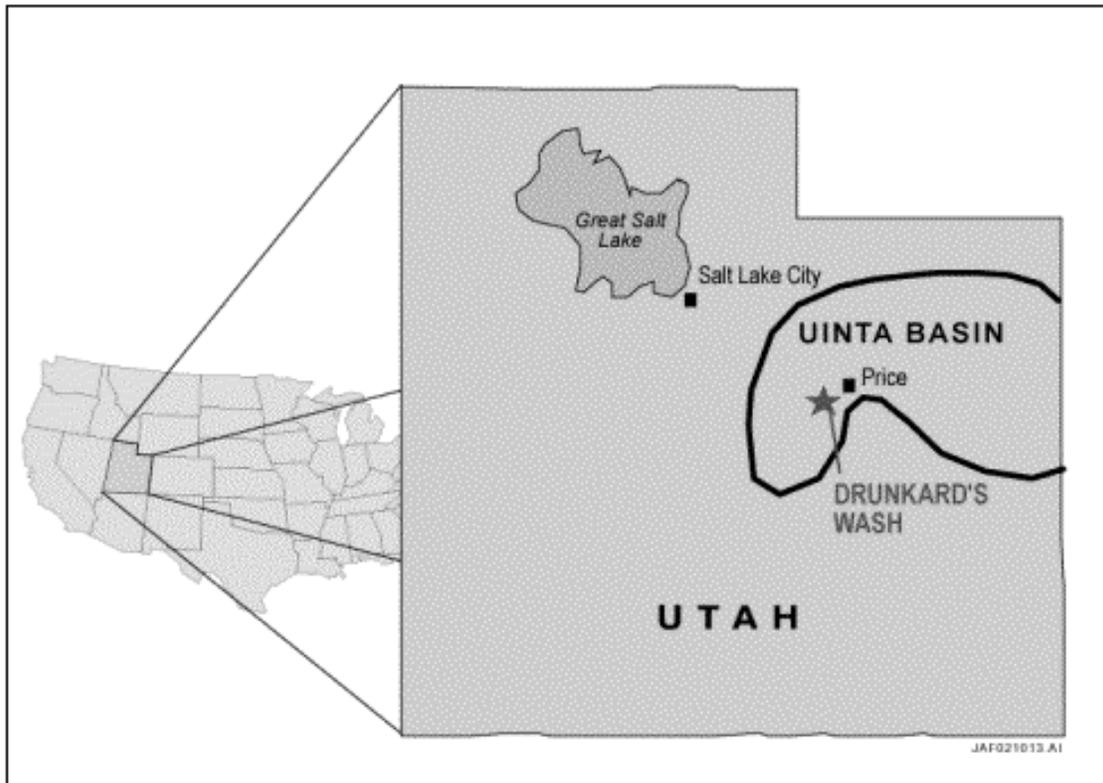

Source : Advanced Resources, International

Figure 3C-10. Ferron Coalbed Methane Play.

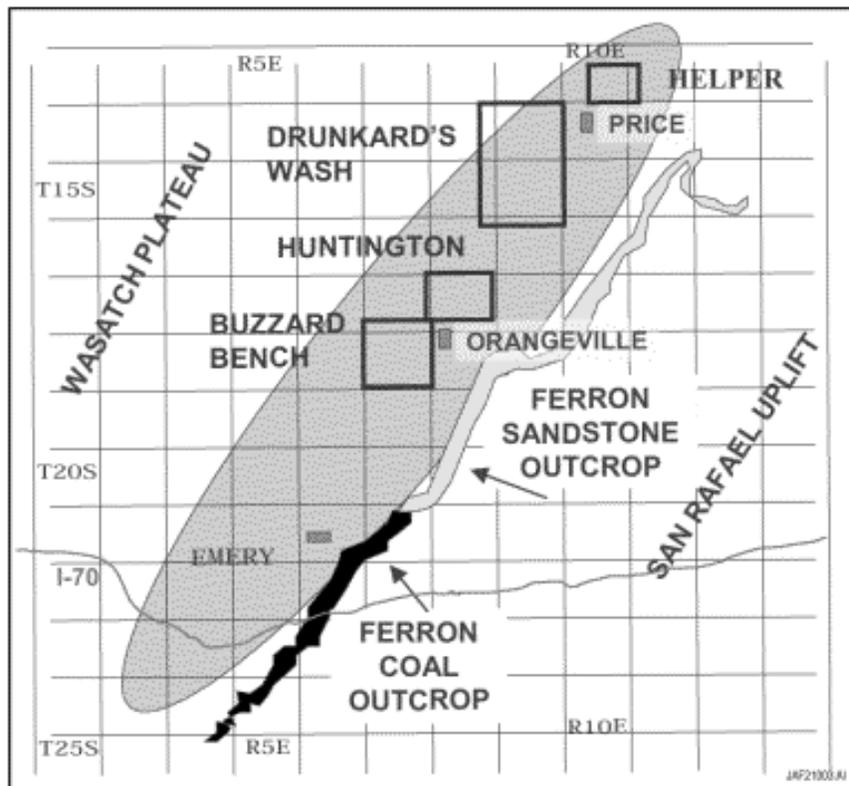

Source: Advanced Resources, International

Looking at the history of well performance, where the more recent wells have lower EUR's than the marginal wells, it becomes important to determine whether this is due to lack (even a loss) of technology progress or is due to improved field operators' ability to identify and develop the better portions of a CBM field with their initial wells.

Table 3C-40 provides a perspective on this question and shows that the initial wells have, in general, been able to target the better 60% of the field placing 72% (293 of the 407) wells drilled to date in this portion of the field.

The analysis of well performance shows that the companies have been able to target the initial wells on the higher productivity, 3.4 Bcf/well area and now are steadily moving development toward the lower productivity, lower coal thickness portions of this gas play.

b. Dry Holes. While dry holes, particularly "economic dry holes" (wells with ultimate gas recovery of less than 0.1 Bcf) are not a major consideration in this CBM play, the data show little change in this technology performance factor (Table 3C-41). The dry hole rate has remained at 97% to 100% essentially the same over time, for wells drilled in this play.

Table 3C-40

**Selectivity and Technology Progress, Drunkards Wash
Coalbed Methane Field, Uinta Basin.**

Well Distribution	Expected Well Selection Distribution			Actual Well Selection Distribution				
	Avg. Well (Bcf)	Range (Bcf)	No. Wells	Pre-1995	1995-1998	1999-2000	2001	TOTAL
Top 10%	6	>5	200	14	12	8	2	36
Next 20%	4	3-5	400	26	25	24	15	90
Middle 30%	2	1-3	600	28	43	71	25	167
Lowest 40%	0.5	0.1-1	800	10	22	46	36	114
No. of Wells			2,000	78	103	149	78	407
Average Well (Bcf)	2.0			3.4	2.7	2.0	1.7	2.4

Source: Advanced Resources, International

Table 3C-41

Dry Hole Rate and Technology Progress
Ferron Coal Trend, Uinta Basin

Time Period	Total Wells	Successful Wells	Dry Holes	% Successful
Pre-1995	84	84	0	100%
1995-1998	136	132	4	97%
1999-2000	194	189	5	97%
2001	107	107	-	100%
Recent	18	18	-	N/a
TOTAL	539	530	9	

Source: Advanced Resources, International

4. Summary. The case study of the coalbed methane development in the Ferron Coal Trend helped establish the well productivities, dry hole rates and resource size for this important new natural gas play.

It also demonstrates that for coalbed methane plays, where coal thickness and gas content are readily measured and can be regionally mapped, producers will have the ability to "high grade" their early development to pursue areas with higher potential for CBM development. This provides guidance on how to allocate and forecast the initial field development practices and expectations for well performance in coalbed methane.

Appendix 3-D. Offshore Oil and Gas Supply Submodule

Introduction

The Offshore Oil and Gas Supply Submodule (OOGSS) uses a field-based engineering approach to represent the exploration and development of U.S. offshore oil and natural gas resources. The OOGSS simulates the economic decision-making at each stage of development from frontier areas to post-mature areas. Offshore petroleum resources are divided into 3 categories:

- **Undiscovered Fields.** The number, location, and size of the undiscovered fields is based on the Minerals Management Service's 2000 hydrocarbon resource assessment.¹ New discoveries between 1999 and 2003 were subtracted from the undiscovered resources allocated to the corresponding evaluation unit.
- **Discovered, Undeveloped Fields.** Any discovery that has been announced but is not currently producing is evaluated in this component of the model. The first production year is an input and is based on announced plans and expectations.
- **Producing Fields.** The fields in this category have wells that have produced oil and/or gas by 2002. The production volumes are from the Minerals Management Service database.

Resource and economic calculations are performed at an evaluation unit basis. An evaluation unit is defined as the area within a planning area that falls into a specific water depth category. Planning areas are the Western Gulf of Mexico (GOM), Central GOM, Eastern GOM, Pacific, and Atlantic. There are five water depth categories: 0-200 meters, 200-800 meters, 800-1600 meters, 1600-2400 meters, and greater than 2400 meters. The crosswalk between region and evaluation unit is shown in Table 3D-1.

Supply curves for crude oil and natural gas are generated for three offshore regions: Pacific, Atlantic, and Gulf of Mexico. Crude oil production includes lease condensate. Natural gas production accounts for both nonassociated gas and associated-dissolved gas. The model is responsive to changes in oil and natural gas prices, royalty relief assumptions, oil and natural gas resource base, and technological improvements affecting exploration and development.

Undiscovered Fields Component

Significant undiscovered oil and gas resources are estimated to exist in the Outer Continental Shelf, particularly in the Gulf of Mexico. Exploration and development of these resources is determined in this component of the OOGSS.

Within each evaluation unit, a field size distribution is assumed based on MMS's latest¹ resource assessment (Table 3D-2). The volume of resource in barrels of oil equivalence by field size class as defined by the U.S. Geological Survey (USGS) is shown in Table 3D-3. In the OOGSS, the mean estimate represents the size of each field in the field size class. Water depth and field size class are used for specifying many of the technology assumptions in the OOGSS. The total number of undiscovered fields in the OOGSS is 2,552. Fields smaller than field size class 5 are assumed to be uneconomic to develop. Resources in the Pacific, Atlantic, and Eastern GOM (except lease sale 181) are currently under drilling moratoria and are not available for exploration and development.

¹U.S. Department of Interior, Minerals Management Service, *2000 Assessment of Conventionally Recoverable Hydrocarbon Resources of the Gulf of Mexico and Atlantic Outer Continental Shelf, as of January 1, 1999*, OCS report 2001-87, www.mms.gov/revaldiv/RedNatAssessment.htm.

Table 3D-1. Offshore Region and Evaluation Unit Crosswalk

No.	Region Name	Planning Area	Water Depth (meters)	Drilling Depth (feet)	Evaluation Unit Name	Region ID
1	Shallow GOM	Western GOM	0 - 200	< 15,000	WGOM0002	3
2	Shallow GOM	Western GOM	0 - 200	> 15,000	WGOMDG02	3
3	Deep GOM	Western GOM	200 - 800	All	WGOM0208	4
4	Deep GOM	Western GOM	800 - 1,600	All	WGOM0816	4
5	Deep GOM	Western GOM	1,600 - 2,400	All	WGOM1624	4
6	Deep GOM	Western GOM	> 2,400	All	WGOM2400	4
7	Shallow GOM	Central GOM	0 - 200	< 15,000	CGOM0002	3
8	Shallow GOM	Central GOM	0 - 200	> 15,000	CGOMDG02	3
9	Deep GOM	Central GOM	200 - 800	All	CGOM0208	4
10	Deep GOM	Central GOM	800 - 1,600	All	CGOM0816	4
11	Deep GOM	Central GOM	1,600 - 2,400	All	CGOM1624	4
12	Deep GOM	Central GOM	> 2,400	All	CGOM2400	4
13	Shallow GOM	Eastern GOM	0 - 200	All	EGOM0002	3
14	Deep GOM	Eastern GOM	200 - 800	All	EGOM0208	4
15	Deep GOM	Eastern GOM	800 - 1600	All	EGOM0816	4
16	Deep GOM	Eastern GOM	1600 - 2400	All	EGOM1624	4
17	Deep GOM	Eastern GOM	> 2400	All	EGOM2400	4
18	Deep GOM	Eastern GOM	> 200	All	EGOML181	4
19	Atlantic	North Atlantic	0 - 200	All	NATL0002	1
20	Atlantic	North Atlantic	200 - 800	All	NATL0208	1
21	Atlantic	North Atlantic	> 800	All	NATL0800	1
22	Atlantic	Mid Atlantic	0 - 200	All	MATL0002	1
23	Atlantic	Mid Atlantic	200 - 800	All	MATL0208	1
24	Atlantic	Mid Atlantic	> 800	All	MATL0800	1
25	Atlantic	South Atlantic	0 - 200	All	SATL0002	1
26	Atlantic	South Atlantic	200 - 800	All	SATL0208	1
27	Atlantic	South Atlantic	> 800	All	SATL0800	1
28	Atlantic	Florida Straits	0 - 200	All	FLST0002	1
29	Atlantic	Florida Straits	200 - 800	All	FLST0208	1
30	Atlantic	Florida Straits	> 800	All	FLST0800	1
31	Pacific	Pacific Northwest	All	All	PNWWAOR	2
32	Pacific	Pacific Northwest	All	All	PNWEELR	2
33	Pacific	Central California	All	All	CCAPAB	2
34	Pacific	Central California	All	All	CCABB	2
35	Pacific	Central California	All	All	CCAANB	2
36	Pacific	Central California	All	All	CCASMPB	2
37	Pacific	Santa Barbara-Ventura Basin	All	All	SBVBSN	2
38	Pacific	Los Angeles Basin	All	All	LABSN	2
39	Pacific	Inner Borderland	All	All	IBSMSP	2
40	Pacific	Inner Borderland	All	All	IBOC	2
41	Pacific	Outer Borderland	All	All	OBSCSRA	2
42	Pacific	Outer Borderland	All	All	OBSNB	2
43	Pacific	Outer Borderland	All	All	OBCVLA	2

Source: ICF Consulting

Table 3D-2. Number of Undiscovered Fields by Evaluation Unit and Field Size Class

Evaluation Unit	Field Size Class (FSC)																Number of Fields	Total Resource (BOE)
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
WGOM0002	0	0	1	1	5	10	21	38	45	35	10	1	0	0	0	0	167	3.303
WGOMDG02	0	0	1	1	6	7	11	10	9	6	4	1	1	0	0	0	57	1.225
WGOM0208	0	0	0	0	0	0	1	2	6	10	5	7	4	1	0	0	36	3.485
WGOM0816	0	0	0	0	0	0	2	4	11	12	12	11	6	4	0	0	62	6.952
WGOM1624	0	0	0	0	0	1	3	7	12	13	11	9	7	2	1	0	66	6.968
WGOM2400	0	0	0	0	0	0	1	3	4	4	5	5	1	1	0	0	24	2.130
CGOM0002	0	0	2	2	8	25	39	65	80	62	20	2	0	0	0	0	305	6.052
CGOMDG02	0	0	3	4	4	4	5	6	4	3	2	1	0	1	0	0	37	1.105
CGOM0208	0	0	0	0	0	0	0	3	7	1	4	4	3	2	0	0	24	2.982
CGOM0816	0	0	0	0	0	2	2	8	14	15	9	11	5	2	1	1	70	8.898
CGOM1624	0	0	0	0	2	3	5	11	20	19	14	16	10	3	2	0	105	11.076
CGOM2400	0	0	0	0	0	2	2	4	4	5	3	3	3	3	1	1	31	6.798
EGOM0002	1	2	6	7	16	22	18	13	12	11	9	7	1	0	0	0	125	2.748
EGOM0208	0	0	2	6	6	7	6	4	3	2	0	0	0	0	0	0	36	0.209
EGOM0816	0	0	2	2	2	2	1	1	1	1	0	0	0	0	0	0	13	0.144
EGOM1624	0	0	0	0	1	1	2	3	3	3	1	1	0	0	0	0	15	0.406
EGOM2400	0	0	0	0	0	0	0	2	3	3	7	5	3	2	1	1	27	6.681
EGOML181	0	0	0	0	0	0	0	0	1	2	3	3	2	1	0	0	12	1.836
NATL0002	2	5	3	6	11	10	11	7	6	3	2	1	0	0	0	0	67	0.638
NATL0208	1	3	3	3	5	6	7	7	5	3	2	1	0	0	0	0	46	0.586
NATL0800	1	2	2	2	5	8	9	5	5	2	1	1	2	0	0	0	45	1.035
MATL0002	3	3	3	6	8	10	8	5	3	2	2	2	0	0	0	0	55	0.656
MATL0208	1	3	3	3	5	6	5	4	2	2	2	2	0	0	0	0	38	0.603
MATL0800	1	2	2	2	4	8	7	5	2	1	1	1	1	1	0	0	38	1.218
SATL0002	4	3	3	4	6	5	7	5	4	4	3	1	0	0	0	0	49	0.655
SATL0208	3	2	3	5	7	8	5	4	3	2	1	1	1	0	0	0	45	0.698
SATL0800	1	2	2	2	4	7	10	6	3	2	1	1	2	0	0	0	43	1.010
FLST0002	2	3	4	4	2	1	1	0	0	0	0	0	0	0	0	0	17	0.013
FLST0208	1	1	2	3	4	2	1	0	0	0	0	0	0	0	0	0	14	0.016
FLST0800	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.000
PNWWAOR	12	13	19	26	25	29	31	19	2	2	1	1	0	0	0	0	180	0.730
PNWEELR	10	25	30	25	25	15	5	4	3	3	0	0	0	0	0	0	145	0.300
CCAPAB	0	1	3	4	12	16	16	22	18	8	8	2	2	0	0	0	112	2.308
CCABB	0	1	2	3	8	12	15	15	10	8	6	2	1	0	0	0	83	1.669
CCAANB	0	0	1	2	2	6	9	8	6	5	2	2	0	0	0	0	43	0.826
CCASMPB	0	2	4	7	6	15	16	17	7	10	0	1	0	0	0	0	85	0.875
SBVBSN	0	2	3	7	14	24	33	39	25	17	8	1	1	0	0	0	174	2.570
LABSN	0	0	0	1	1	3	4	5	3	3	1	0	0	0	0	0	21	0.297
IBSMSP	0	1	1	3	2	6	6	8	3	3	2	1	1	0	0	0	37	0.831
IBOC	0	1	1	3	5	6	8	8	7	5	4	2	1	0	0	0	51	1.263
OBSCSRA	0	0	1	1	2	3	4	4	4	3	2	1	0	0	0	0	25	0.517
OBSNB	0	0	1	1	3	4	5	4	5	3	2	0	1	0	0	0	29	0.682
OBCVLA	0	0	1	1	2	3	4	5	4	3	1	2	0	0	0	0	26	0.596

Source: ICF Consulting


Table 3D-3. USGS Field Size Definition (MMBOE)

Field Size Class	Minimum	Maximum	Mean
5	0.047	0.095	0.068
6	0.095	0.190	0.137
7	0.190	0.380	0.274
8	0.380	0.760	0.547
9	0.760	1.520	1.094
10	1.520	3.040	2.189
11	3.040	6.070	4.378
12	6.070	12.140	8.741
13	12.140	24.300	17.482
14	24.300	48.600	34.992
15	48.600	97.200	69.984
16	97.200	194.300	139.968
17	194.300	388.600	279.792
18	388.600	777.200	559.584
19	777.200	1554.400	1119.168
20	1554.400	9999	2238.336

Source: U.S. Geological Survey


The decision for exploration and development is performed at a prospect level that could have more than one field. A prospect is defined as a potential project that covers exploration, appraisal, production facility construction, development, production, and transportation (Figure 3D-1). There are three types of prospects: (1) a single field with its own production facility, (2) multiple medium size fields sharing a production facility, and (3) multiple small fields utilizing nearby production facility. The net present value (NPV) of each possible prospect is generated using the calculated exploration costs, production facility costs, development costs, completion costs, operating costs, flowline costs, transportation costs, royalties, taxes, and production revenues. Delays for exploration, production facility construction, and development are incorporated in this NPV calculation. The possible prospects are then ranked from best (highest NPV) to worst (lowest NPV). The best prospects are selected subject to field availability and rig constraint. The basic flowchart is presented in Figure 3D-2.

Figure 3D-1. Prospect Exploration, Development, and Production Schedule

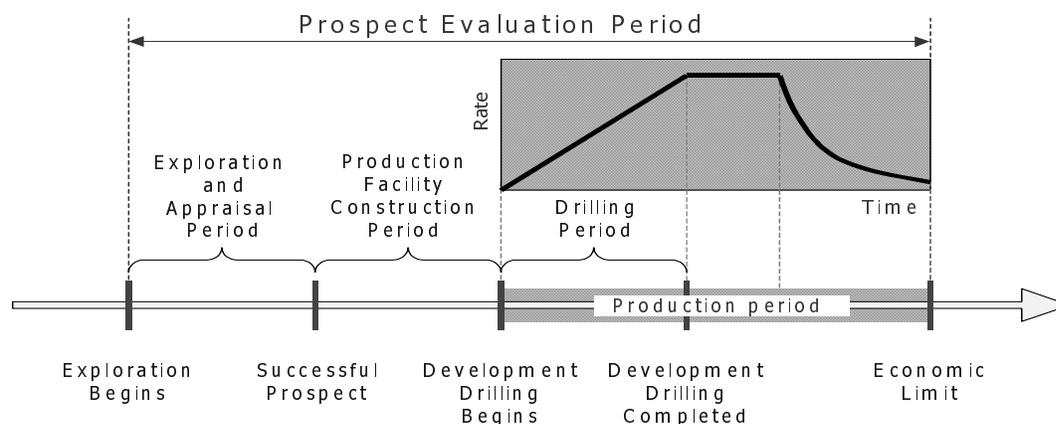

Source: ICF Consulting

Figure 3D-2. Flowchart for Undiscovered Field Component of the OOGSS

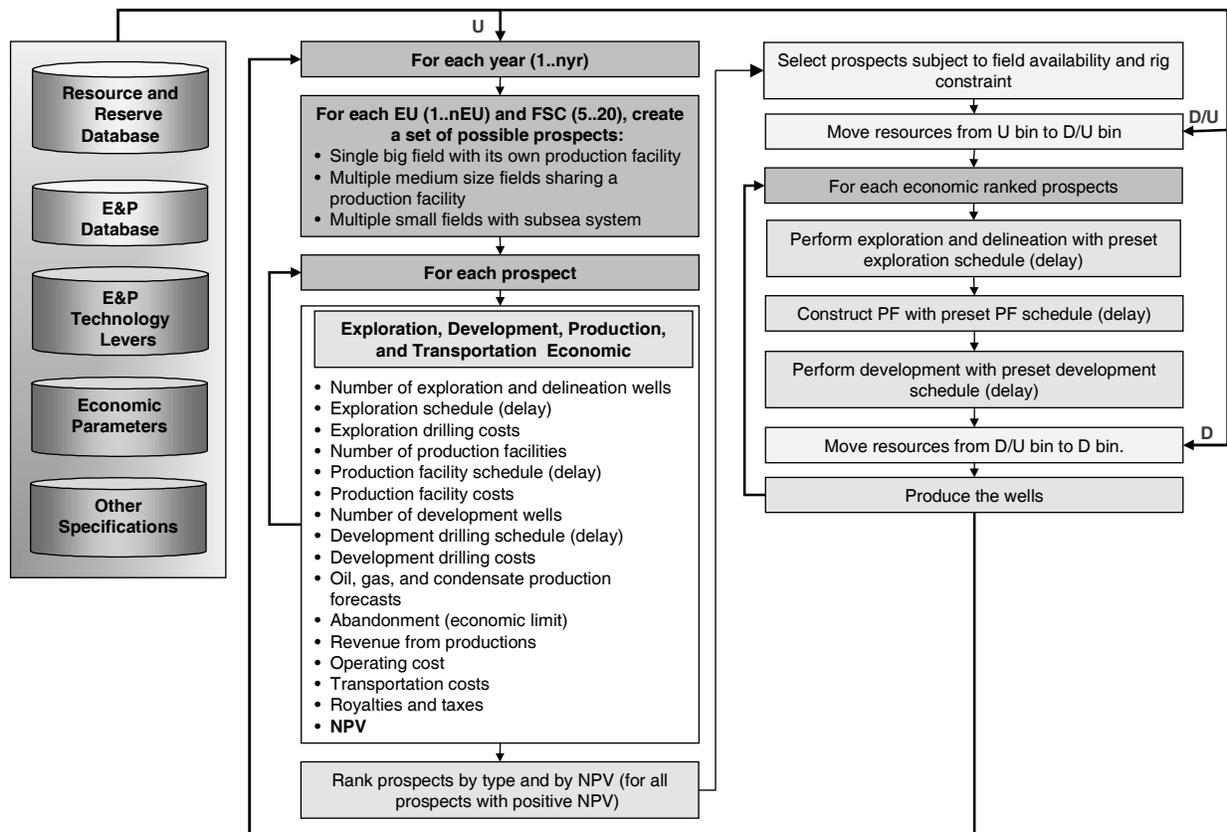

Note: U = Undiscovered, D/U = Discovered/Undeveloped, D=Developed
 Source: ICF Consulting

Calculation of Costs

The technology employed in the deepwater offshore areas to find and develop hydrocarbons can be significantly different than that used in shallower waters, and represents significant challenges for the companies and individuals involved in the deepwater development projects. In many situations in the deepwater OCS, the choice of technology used in a particular situation depends on the size of the prospect being developed.

Exploration Drilling

During the exploration phase of an offshore project, the type of drilling rig used depends on both economic and technical criteria. Offshore exploratory drilling usually is done using self-contained rigs that can be moved easily. Four types of drilling rigs are incorporated into the OOGSS.

Jack-up rigs are limited to a water depth of about 600 feet or less. Jack-ups are towed to their location where heavy machinery is used to jack the legs down into the water until they rest on the ocean floor. When this is completed, the platform containing the work area rises above the water. After the platform has risen about 50 feet out of the water, the rig is ready to begin drilling.

Submersible rigs are used in relatively shallow water, usually 80 feet or less. The structure is towed to its location where it is submerged until it sits on the bottom. This submerging, serves as its mooring system, although anchors may also be used.

Semi-submersible rigs are floating structures that employ large engines to position the rig over the hole dynamically. This extends the maximum operating depth greatly, and some of these rigs can be used in water depths up to and beyond 3,000 feet. The shape of a semisubmersible rig tends to dampen wave motion greatly regardless of wave direction. This allows its use in areas where wave action is severe.

Dynamically positioned drill ships are a second type of floating vessel used in offshore drilling. They are usually used in water depths exceeding 3,000 feet where the semi-submersible type of drilling rigs can not be deployed. Some of the drillships are designed with the rig equipment and anchoring system mounted on a central turret. The ship is rotated about the central turret using thrusters so that the ship always faces incoming waves. This helps to dampen wave motion.

Water depth is the primary criterion for selecting a drilling rig. Drilling in shallow waters (up to 1,500 feet) can be done with jack-up or submersible drilling rigs. Drilling in deeper water (greater than 1,500 feet) can be done with semi-submersible drilling rigs or drill ships. The number of rigs available for exploration are limited and varies by water depth levels. Drilling rigs are allowed to move one water depth level lower if needed.

Production Facility

Seven different options for development/production of offshore prospects are currently assumed in OOGSS, based on those currently considered and/or employed by operators in Gulf of Mexico OCS. These are the conventional fixed platforms, the compliant towers, tension leg platforms, Spar platforms, floating production systems and subsea satellite well systems. Choice of platform tends to be a function of the size of field and water depth, though in reality other operational, environmental, and/or economic decisions influence the choice.

- **Conventional Fixed Platform (FP).** A fixed platform consists of a jacket with a deck placed on top, providing space for crew quarters, drilling rigs, and production facilities. The jacket is a tall vertical section made of tubular steel members supported by piles driven into the seabed. The fixed platform is economical for installation in water depths up to 1,200 feet. Although advances in engineering design and materials have been made, these structures are not economically feasible in deeper waters.
- **Compliant Towers (CT).** The compliant tower is a narrow, flexible tower type of platform which is supported by a piled foundation. Its stability is maintained by a series of guy wires radiating from the tower and terminating on pile or gravity anchors on the sea floor. The compliant tower can withstand significant forces while sustaining lateral deflections, and is suitable for use in water depths of 1,200 to 3,000 feet. A single tower can accommodate up to 60 wells, however, the compliant tower is constrained by limited deck loading capacity and no oil storage capacity.
- **Tension Leg Platform (TLP).** The tension leg platform is a type of semi-submersible structure which is attached to the sea bed by tubular steel mooring lines. The natural buoyancy of the platform creates an upward force which keeps the mooring lines under tension and helps maintain vertical stability. This type of platform becomes a viable alternative at water depths of 1,500 feet and is considered to be the dominant system at water depths greater than 2,000 feet. Further, the costs of the TLP are relatively insensitive to water depth. The primary advantages of the TLP are its applicability in ultra-deepwaters, an adequate deck loading

capacity, and some oil storage capacity. In addition, the field production time lag for this system is only about 3 years.

- **Floating Production System (FPS).** The floating production system, a buoyant structure, consists of a semi-submersible or converted tanker with drilling and production equipment anchored in place with wire rope and chain to allow for vertical motion. Because of the movement of this structure in severe environments, the weather-related production downtime is estimated to be about 10 percent. These structures can only accommodate a maximum of approximately 25 wells. The wells are completed subsea on the ocean floor and are connected to the production deck through a riser system designed to accommodate platform motion. This system is suitable for marginally economic fields in water depths up to 4,000 feet.
- **Spar Platform (SPAR).** Spar Platform consists of a large diameter single vertical cylinder supporting a deck. It has a typical fixed platform topside (surface deck with drilling and production equipment), three types of risers (production, drilling, and export), and a hull which is moored using a taut catenary system of 6 to 20 lines anchored into the seafloor. Spar platforms are presently used in water depths up to 3,000 feet, although existing technology is believed to be able to extend this to about 10,000 feet.
- **Floating Production Storage and Offloading (FPSO).** An FPSO system is an offshore production facility that is typically ship-shaped and stores crude oil in tanks located in the hull of the vessel. The crude oil is periodically offloaded to shuttle tankers or ocean-going barges for transport to shore. FPSOs may be used as production facilities to develop marginal oil fields or fields in deepwater areas remote from the existing OCS pipeline infrastructure.
- **Subsea Wells System (SS).** Subsea systems range from single subsea well tied back to a nearby production platform (such as FPS or TLP) to a set of multiple wells producing through a common subsea manifold and pipeline system to a distant production facility. These systems can be used in water depths up to at least 7,000 feet.

The type of production facility for development and production depends on water depth level as shown in Table 3D-4.

Table 3D-4. Production Facility by Water Depth Level

Water Depth Range (feet)		Production Facility Type						
Minimum	Maximum	FP	CT	TLP	FPS	SPAR	FPSO	SS
0	656	X						X
656	2625		X				X	X
2625	5249			X			X	X
5249	7874				X	X	X	X
7874	10000				X	X	X	X

Source: ICF Consulting

Development Drilling

Pre-drilling of development wells during the platform construction phase is done using the drilling rig employed for exploration drilling. Development wells drilled after installation of the platform which also serves as the development structure is done using the platform itself. Hence, the choice of drilling rig for development drilling is tied to the choice of the production platform.

Completion and Operating

Completion and operating costs are a function of water depth range and drilling depth.

Transportation

It is assumed in the model that existing trunk pipelines will be used, and that the prospect economics must support only the gathering system design and installation. However, in case of small fields tied back to some existing neighboring production platform, a pipeline is assumed to be required to transport the crude oil and natural gas to the neighboring platform.

Exploration, Development, and Production Scheduling

The typical project development in the offshore consists of the following phases:²

- Exploration phase,
 - Exploration drilling program
 - Delineation drilling program
- Development phase,
 - Fabrication and installation of the development/production platform
 - Development drilling program
 - Pre-drilling during construction of platform
 - Drilling from platform
 - Construction of gathering system
- Production operations, and
- Field abandonment.

The timing of each activity, relative to the overall project life and to other activities, affects the potential economic viability of the undiscovered prospect. The modeling objective is to develop an exploration, development, and production plan which both realistically portrays existing and/or anticipated offshore practices and also allows for the most economical development of the field. A description of each of the phases is provided below.

Exploration Phase

An undiscovered field is assumed to be discovered by a successful exploration well (i.e., a new field wildcat). Delineation wells are then drilled to define the vertical and areal extent of the reservoir.

Exploration drilling. The exploration success rate (ratio of the number of field discovery wells to total wildcat wells) is used to establish the number of exploration wells required to discover a field as follows:

²The pre-development activities, including early field evaluation using conventional geological and geophysical methods and the acquisition of the right to explore the field, are assumed to be completed before initiation of the development of the prospect.

number of exploratory wells = 1 / [exploration success rate]

For example, a 25 percent exploration success rate will require four exploratory wells: one finds the field and three are dry holes.

Delineation drilling. Exploratory drilling is followed by delineation drilling for field appraisal (1 to 4 wells depending on the size of the field). The delineation wells define the field location vertically and horizontally so that the development structures and wells may be set in optimal positions. All delineation wells are converted to production wells at the end of the production facility construction.

Development Phase

During this phase of an offshore project, the development structures are designed, fabricated, and installed; the development wells (successful and dry) are drilled and completed; and the product transportation/gathering system is installed.

Development structures. The model assumes that the design and construction of any development structure begins in the year following completion of the exploration and delineation drilling program. However, the length of time required to complete the construction and installation of these structures depends upon the type of system used. The required time for construction and installation of the various development structures used in the model is shown in Table 3D-5. This time lag is important in all offshore developments, but it is especially critical for fields in deepwater and for marginally economic fields.

Table 3D-5. Production Facility Design, Fabrication, and Installation Period (Years)

PLATFORMS	Water Depth (Feet)														
	0	100	400	800	1000	1500	2000	3000	4000	5000	6000	7000	8000	9000	10000
2	1	1	1	1	1	1	1	1	2	2	3	3	4	4	4
8	2	2	2	2	2	2	2	2	2	2	3	3	4	4	4
12	2	2	2	2	2	2	2	2	2	2	3	3	4	4	4
18	2	2	2	2	2	2	2	2	2	3	3	3	4	4	4
24	2	2	2	2	2	2	2	2	2	3	3	4	4	4	5
36	2	2	2	2	2	2	2	2	2	3	3	4	4	4	5
48	2	2	2	2	2	2	3	3	3	3	4	4	4	4	5
60	2	2	2	2	2	2	3	3	3	3	4	4	4	4	5
OTHERS															
SS	1	1	1	1	1	1	2	2	2	3	3	3	4	4	4
FPS								3	3	3	4	4	4	4	5
FPSO			5	5	5	5	5	5	5	5	5	5	5	5	5

Source: ICF Consulting

Development drilling schedule. The number of development wells varies by water depth and field size class as shown in Table 3D-6. The development drilling schedule is determined based on the assumed drilling capacity (maximum number of wells that could be drilled in a year). This drilling capacity varies

by type of production facility and water depth. For a platform type production facility (FP, CT, or TLP), the development drilling capacity is also a function of the number of slots. The assumed drilling capacity by production facility type is shown in Table 3D-7.

Table 3D-6. Number of Development Wells

Water Depth (meters)	Field Size Class															
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
0 - 200	1	1	1	1	2	2	4	6	10	10	15	20	40	50	50	60
200 - 800	1	1	1	1	1	1	2	6	8	8	15	20	30	40	50	60
800 - 1600	1	1	1	1	1	1	1	2	4	4	8	10	20	30	50	60
1600 - 2400	1	1	1	1	1	1	1	2	4	4	8	10	20	30	50	60
> 2400	1	1	1	1	1	1	1	2	4	4	8	10	20	30	40	50

Source: ICF Consulting

Table 3D-7. Development Drilling Capacity by Production Facility Type

Maximum Number of Wells Drilled (wells/platform/year, 1 rig)		Maximum Number of Wells Drilled (wells/field/year)			
Drilling Depth (feet)	Drilling Capacity (24 slots)	Water Depth (feet)	SS	FPS	FPSO
0	24	0	4		4
6000	24	1000	4		4
7000	24	2000	4		4
8000	20	3000	4	4	4
9000	20	4000	4	4	4
10000	20	5000	3	3	3
11000	20	6000	2	2	2
12000	16	7000	2	2	2
13000	16	8000	1	1	1
14000	12	9000	1	1	1
15000	8	10000	1	1	1
16000	4				
17000	2				
18000	2				
19000	2				
20000	2				
30000	2				

Source: ICF Consulting

Production transportation/gathering system. It is assumed in the model that the installation of the gathering systems occurs during the first year of construction of the development structure and is completed within 1 year.


Production Operations

Production operations begin in the year after the construction of the structure is complete. The life of the production depends on the field size, water depth, and development strategy. First production is from delineation wells that were converted to production wells. Development drilling starts at the end of the production facility construction period.

Production profiles

The original hydrocarbon resource (in BOE) is divided between oil and natural gas using a user specified proportion. Due to the development drilling schedule, not all wells in the same field will produce at the same time. This yields a ramp-up profile in the early production period (Figure 3D-3). The initial production rate is the same for all wells in the field and is constant for a period of time. Field production reaches its peak when all the wells have been drilled and start producing. The production will start to decline (at a user specified rate) when the ratio of cumulative production to initial resource equals a user specified fraction. Gas (plus lease condensate) production is calculated based on gas resource and oil (plus associated gas) production is calculated based on the oil resource. Lease condensate production is separated from the gas production using the user specified condensate yield. Likewise, associated-dissolved gas production is

Figure 3D-3. Undiscovered Field Production Profile

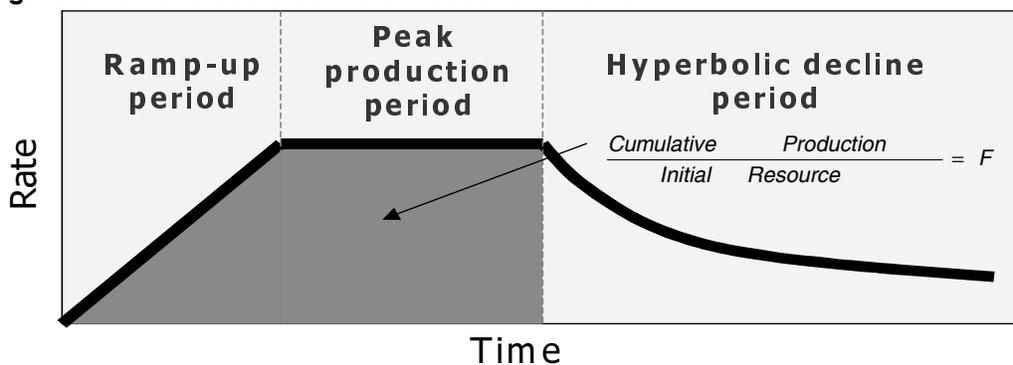

Source: ICF Consulting

separated from the oil production using the user specified associated gas-to-oil ratio. Associated-dissolved gas production is then tracked separately from the nonassociated gas production throughout the projection. Lease condensate production is added to crude oil production and is not tracked separately.

Field Abandonment


All wells in a field are assumed to be shut-in when the net revenue from the field is less than total State and Federal taxes. Net revenue is total revenue from production less royalties, operating costs, transportation costs, and severance taxes.

Discovered Undeveloped Fields Component

Announced discoveries that have not been brought into production by 2002 are included in this component of the OOGSS. The data required for these fields include location, field size class, gas percentage of BOE resource, condensate yield, gas to oil ratio, start year of production, initial production rate, fraction produced before decline, and hyperbolic decline parameters. The BOE resource for each field corresponds to the field size class as specified in Table 3D-3.

The number of development wells is the same as that of an undiscovered field in the same water depth and of the same field size class (Table 3D-6). Production starts to decline when the ratio of cumulative production to initial resource equals the user specified fraction (Figure 3D-4). Production continues to decline using a hyperbolic decline curve until the economic limit is reached and the field is abandoned. Associated-dissolved gas and lease condensate production is determined the same way as in the undiscovered field component.

Figure 3D-4. Discovered Undeveloped Field Production Profile

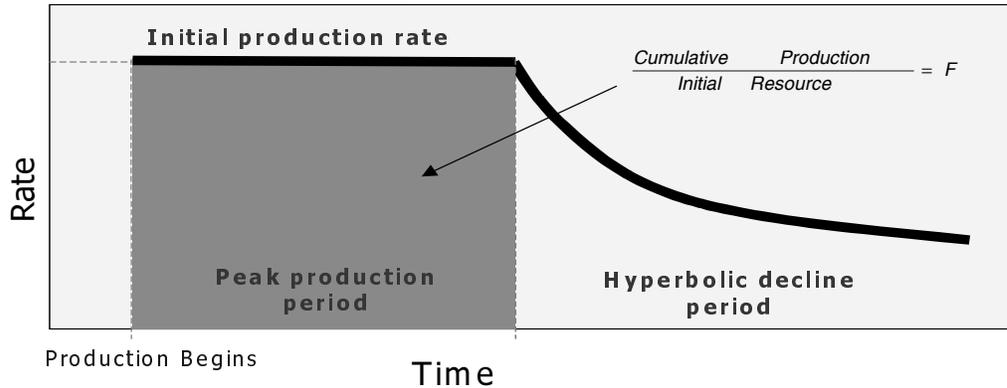


Source: ICF Consulting

Producing Fields Component

A separate database is used to track currently producing fields. The data required for each producing field include location, field size class, field type (oil or gas), total recoverable resources, historical production (1990-2002), and hyperbolic decline parameters. The number of development wells is the same as that of an undiscovered field in the same water depth and of the same field size class (Table 3D-6).


Projected production from the currently producing fields will continue to decline if, historically, production from the field is declining (Figure 3D-5). Otherwise, production is held constant for a period of time equal to the sum of the specified number ramp-up years and number of years at peak production after which it will decline (Figure 3D-6). Production will decline using a hyperbolic decline curve until the economic limit is achieved and the field is abandoned. Typical production profile data are shown in Table 3D-8. Associated-dissolved gas and lease condensate production is determined the same way as in the undiscovered field component.

Figure 3D-5. Production Profile for Producing Fields - Constant Production Case

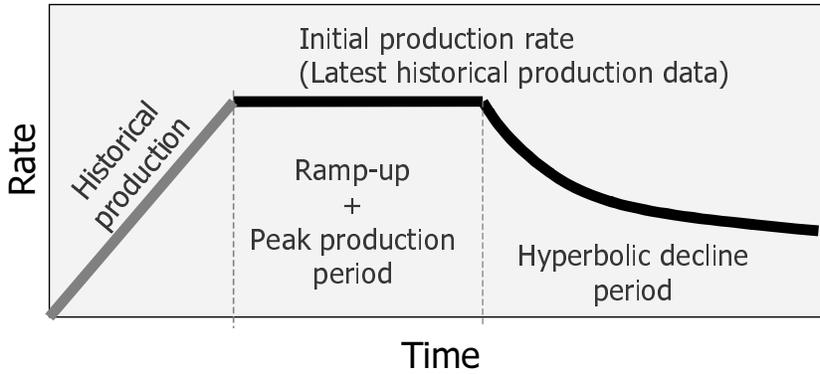

Source: ICF Consulting

Figure 3D-6. Production Profile for Producing Fields - Declining Production Case

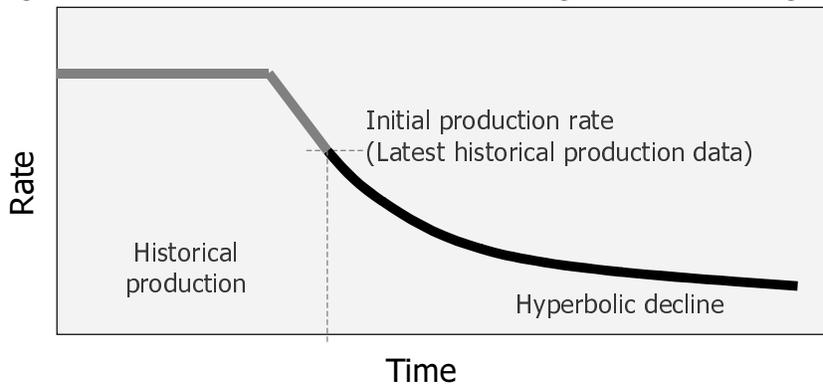

Source: ICF Consulting

Table 3D-8. Production Profile Data for Oil & Gas Producing Fields

Region	Crude Oil						Natural Gas					
	FSC 5 - 13			FSC 14 - 20			FSC 5 - 13			FSC 14 - 20		
	Ramp-up (years)	At Peak (years)	Initial Decline Rate	Ramp-up (years)	At Peak (years)	Initial Decline Rate	Ramp-up (years)	At Peak (years)	Initial Decline Rate	Ramp-up (years)	At Peak (years)	Initial Decline Rate
Shallow GOM	2	2	0.15	3	3	0.10	2	1	0.20	3	2	0.10
Deep GOM	2	2	0.20	2	3	0.15	2	2	0.25	3	2	0.20
Atlantic	2	2	0.20	3	3	0.20	2	1	0.25	3	2	0.20
Pacific	2	2	0.10	3	2	0.10	2	1	0.20	3	2	0.20

FSC = Field Size Class

Source: ICF Consulting

Generation of Supply Curves

As mentioned earlier, the OOGSS does not determine the actual volume of crude oil and nonassociated natural gas produced in the given year but rather provides the parameters for the short-term supply functions used to determine regional supply and demand market equilibration as described in Chapter 3. In each year, t , and offshore region, r , the OGSM calculates the stock of proved reserves at the beginning of year $t+1$ and the expected production-to-reserves (PR) ratio for year $t+1$ as follows.

The volume of proved reserves in any year is calculated as:

$$\text{RESOFF}_{r,k,t+1} = \text{RESOFF}_{r,k,t} - \text{PRDOFF}_{r,k,t} + \text{NRDOFF}_{r,k,t} + \text{REVOFF}_{r,k,t} \quad (3D-1)$$

where

RESOFF	=	beginning- of-year reserves
PRDOFF	=	production
NRDOFF	=	new reserve discoveries
REVOFF	=	reserve extensions, revisions, and adjustments
r	=	region (1=Atlantic, 2=Pacific, 3=GOM)
k	=	fuel type (1=oil; 2=nonassociated gas)
t	=	year.

Expected production, EXPRDOFF , is the sum of the field level production determined in the undiscovered fields component, the discovered, undeveloped fields component, and the producing field component. The volume of crude oil production (including lease condensate), PRDOFF , passed to the PMM is equal to EXPRDOFF . Nonassociated natural gas production in year t is the market equilibrated volume passed to the OGSM from the NGTDM.

Reserves are added through new field discoveries as well as delineation and developmental drilling. Each newly discovered field not only adds proved reserves but also a much larger amount of inferred reserves. The allocation between proved and inferred reserves is based on historical reserves growth statistics provided by the Minerals Management Service. Specifically,

$$\text{NRDOFF}_{r,k,t} = \text{NFDISC}_{r,k,t-1} * \left(\frac{1}{\text{RSVGRO}_k} \right) \quad (3D-2)$$

$$\text{NIRDOFF}_{r,k,t} = \text{NFDISC}_{r,k,t-1} * \left(1 - \frac{1}{\text{RSVGRO}_k} \right) \quad (3D-3)$$

where

NRDOFF	=	new reserve discovery
NIRDOFF	=	new inferred reserve additions
NFDISC	=	new field discoveries

- RSVGRO = reserves growth factor (8.2738 for oil and 5.9612 for gas)
- r = region (1=Atlantic, 2=Pacific, 3=GOM)
- k = fuel type (1=oil; 2=gas)
- t = year.

Reserves are converted from inferred to proved with the drilling of other exploratory (or delineation) wells and developmental wells. Since the expected offshore PR ratio is assumed to remain constant at the last historical value, then the reserves need to support the total expected production, EXPRDOFF, can be calculated by dividing EXPRDOFF by the PR ratio. Reconfiguring Equation 3D-1 to solve for REVOFF gives

$$\text{REVOFF}_{r,k,t} = \frac{\text{EXPRDOFF}_{r,k,t}}{\text{PR}_{r,k}} + \text{PRDOFF}_{r,k,t} - \text{RESOFF}_{r,k,t} - \text{NRDOFF}_{r,k,t} \quad (3D-4)$$

The remaining proved reserves, inferred reserves, and undiscovered resources are tracked throughout the projection period to ensure that production from offshore sources does not exceed the assumed resource base. Field level associated-dissolved gas is summed to the regional level and passed to the NGTDM.

Advanced Technology Impacts

Advances in technology for the various activities associated with crude oil and natural gas exploration, development, and production can have a profound impact on the costs associated with these activities. The OOGSS has been designed to give due consideration to the effect of future advances in technology that may occur in the future. The specific technology levers and values are presented in Table 3D-9.

Table 3D-9. Offshore Exploration and Production Technology Levers

Technology Lever	Total Improvement (percent)	Number of Years
Exploration success rates	20	25
Delay to commence first exploration and between exploration	15	25
Exploration & development drilling costs	30	25
Operating cost	30	25
Time to construct production facility	15	25
Production facility construction costs	30	25
Initial constant production rate	20	25
Decline rate	0	25

Source: ICF Consulting